





G-6411



Green Pin® Closed Spelter Socket

- **Material:** high tensile steel, quenched and tempered
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details



number	minimum breaking load	diameter wire rope	length	width	width inside bow	length inside bow	thickness bow	thickness bow	opening	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg
296	8	6 - 7	101	37	22	40	11	13	9	0.27
297	12	8 - 10	119	43	25	48	14	17.5	12	0.43
298	20	11 - 13	140	52	30	58	18	23.5	15	0.76
299	25	14 - 16	162	68	37	66	21	26	17.5	1.52
200	45	18 - 19	194	76	42	78	27	32	21.5	2.31
201	70	20 - 22	224	92	47	90	33	38	24	4.31
204	85	23 - 26	253	104	57	103	36	44	28	6.03
207	105	27 - 30	282	114	63	116	39	51	32	7.99
212	136	31 - 36	312	127	70	130	43	57	38	10.9
215	150	37 - 39	358	136	79	155	51	63	41	13.8
217	170	40 - 42	390	146	83	171	54	70	44	17.4
219	225	43 - 48	443	171	93	198	55	76	51	26.9
222	280	49 - 54	502	193	100	224	62	82	57	38.8
224	360	55 - 60	548	216	112	247	73	92	63	54.7
226	425	61 - 68	597	241	140	270	79	102	73	70.8
227	460	69 - 75	644	273	159	286	79	124	79	102
228	560	76 - 80	686	292	171	298	83	133	86	123
229	625	81 - 86	743	311	184	311	102	146	92	152
230	720	87 - 93	788	330	197	330	102	159	99	178
231	875	94 - 102	845	362	216	356	108	178	108	233
233	1200	108 - 115	1000	405	235	425	125	190	125	329
240	1300	120 - 130	1150	450	260	525	125	200	143	453

CAD

Socket Lock Socketing Resin




It is advised to use the Socket Lock Socketing Resin in combination with the Green Pin® Spelter Sockets. Go to www.greenpin.com/socketlock for more information about the Socket Lock Socketing Resin. To offer a complete assortment, Green Pin®'s parent company, Royal Van Beest, is the official distributor of Socket Lock Socketing Resin. Green Pin® can supply the Socket Lock resin kit sizes 250, 500, 1000 and 2000 cc from stock.





Green Pin® Open Spelter Socket CP

Open spelter socket with cotter pin

Scan for additional product details

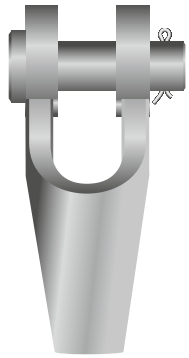

G-6412

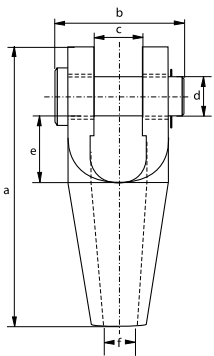

- **Material:** high tensile steel, quenched and tempered
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

number	minimum breaking load	diameter wire rope	length	width	width inside	diameter pin	length inside	opening	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	kg	kg
196	8	6 - 7	109	51	19	16	33	9	0.9	0.47
197	12	8 - 10	124	62	21	21	34	12	0.17	0.71
198	20	11 - 13	143	66	26	25	37	15	0.26	1.04
199	25	14 - 16	172	82	33	30	49	18	0.47	1.83
100	45	18 - 19	205	95	38	35	58	21	0.74	3.09
104	60	20 - 22	235	110	44	41	68	24	1.19	4.68
108	85	23 - 26	275	130	51	51	75	28	2.15	8.35
111	105	27 - 30	306	144	57	57	85	32	2.95	11.4
115	136	31 - 36	338	155	63	64	95	38	4.02	15.5
118	150	37 - 39	394	178	76	70	127	41	5.54	23.2
120	170	40 - 42	418	187	76	76	127	44	6.89	27.4
125	225	43 - 48	468	213	89	89	133	51	10.6	42.4
128	280	49 - 54	552	240	101	95	180	57	13.7	63.9
130	360	55 - 60	598	270	113	108	196	63	19.9	91.1
132	425	61 - 68	654	303	127	121	212	73	28.1	127
135	460	69 - 75	696	349	133	127	215	79	35.6	164
138	560	76 - 80	737	371	146	133	219	86	41.5	199
140	625	81 - 86	788	391	159	140	228	92	48.5	235
142	720	87 - 93	852	411	171	152	242	99	59.8	294
144	875	94 - 102	914	447	191	178	254	108	89	393
146	1200	108 - 115	1160	489	206	193	368	125	114	642

CAD

Socket Lock Socketing Resin




It is advised to use the Socket Lock Socketing Resin in combination with the Green Pin® Spelter Sockets. Go to www.greenpin.com/socketlock for more information about the Socket Lock Socketing Resin. To offer a complete assortment, Green Pin®'s parent company, Royal Van Beest, is the official distributor of Socket Lock Socketing Resin. Green Pin® can supply the Socket Lock resin kit sizes 250, 500, 1000 and 2000 cc from stock.





Green Pin® Open Spelter Socket BN

Open spelter socket with safety bolt

Scan for additional product details

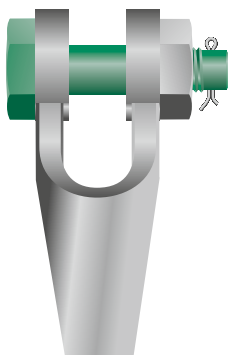

G-6422

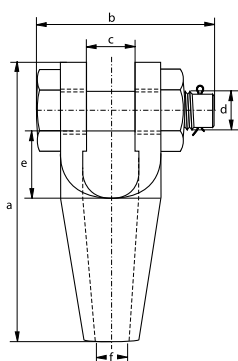

- **Material:** high tensile steel, quenched and tempered
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

number	minimum breaking load	diameter wire rope	length	width	width inside	diameter pin	length inside	opening	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	kg	kg
196	8	6 - 7	109	69	19	16	33	9	0.15	0.53
197	12	8 - 10	124	83	21	20	35	12	0.32	0.86
198	20	11 - 13	143	101	26	25	37	15	0.61	1.40
199	25	14 - 16	172	124	33	30	49	18	1.08	2.43
100	45	18 - 19	205	138	38	35	58	21	1.59	3.93
104	60	20 - 22	235	148	44	41	68	24	2.3	5.74
108	85	23 - 26	275	176	51	50	76	28	4.06	10.3
111	105	27 - 30	306	193	57	57	85	32	5.51	14.0
115	136	31 - 36	338	210	63	63	95	38	7.44	18.9
118	150	37 - 39	394	230	76	70	127	41	9.40	27.1
120	170	40 - 42	418	244	76	77	126	44	12.1	32.7

CAD

Socket Lock Socketing Resin



It is advised to use the Socket Lock Socketing Resin in combination with the Green Pin® Spelter Sockets. Go to www.greenpin.com/socketlock for more information about the Socket Lock Socketing Resin. To offer a complete assortment, Green Pin®'s parent company, Royal Van Beest, is the official distributor of Socket Lock Socketing Resin. Green Pin® can supply the Socket Lock resin kit sizes 250, 500, 1000 and 2000 cc from stock.





Green Pin® Open Wedge Socket CP

Open wedge socket with cotter pin

Scan for
additional
product
details



G-6413

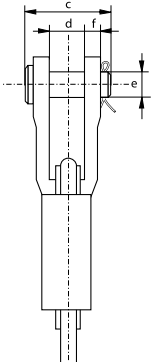



- **Material:** high tensile steel, quenched and tempered
- **Standard:** generally to EN 13411-6
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

number	minimum breaking load	diameter wire rope	length	length to center pin	width	width inside	diameter pin	thickness side plates	diameter eye	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg	kg
0.25	8	7 - 8	128	110	51	18	16	9	36	0.09	0.83
0.5	12	9 - 10	165	142	62	20.5	21	11	46	0.17	1.58
1	20	11 - 13	175	146	66	25	25	12	57	0.26	2.50
2	25	14 - 16	211	176	82	31	30	15	70	0.47	4.42
3	40	18 - 19	252	212	95	38	35	16	80	0.74	7.76
4	55	20 - 22	288	240	110	44	41	19	95	1.19	11.3
5	75	24 - 26	329	274	130	51	51	22	110	2.16	16.5
6	90	27 - 29	375	310	144	57	57	25	130	2.95	21.8
7	110	30 - 32	423	350	155	63	64	28	146	4.02	31
8	125	34 - 36	474	400	163	69	64	28	148	4.22	39.6
9	150	37 - 39	527	450	178	76	70	30	153	5.54	49.4
10	170	40 - 42	580	500	187	76	76	33	160	6.88	68.1
11	225	43 - 48	650	550	213	89	89	39	186	10.6	94.1

CAD



G-6423

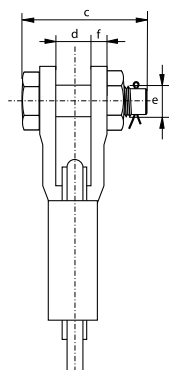

Green Pin® Open Wedge Socket BN

Open wedge socket with safety bolt

- **Material:** high tensile steel, quenched and tempered
- **Standard:** generally to EN 13411-6
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

Scan for additional product details



number	minimum breaking load	diameter wire rope	length	length to center pin	width	width inside	diameter pin	thickness side plates	diameter eye	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg	kg
0.25	8	7 - 8	128	110	69	18	16	9	36	0.15	0.90
0.5	12	9 - 10	165	142	83	20.5	20	11	46	0.32	1.72
1	20	11 - 13	175	146	101	25	25	12	57	0.61	2.86
2	25	14 - 16	211	176	124	31	30	15	70	1.08	5.03
3	40	18 - 19	252	212	138	38	35	16	80	1.59	8.61
4	55	20 - 22	288	240	148	44	41	19	95	2.25	12.4
5	75	24 - 26	329	274	176	51	50	22	110	4.06	18.4
6	90	27 - 29	375	310	193	57	57	25	130	5.51	24.3
7	110	30 - 32	423	350	210	63	63	28	146	7.44	34.4
8	125	34 - 36	474	400	216	69	65	28	148	7.79	43.2
9	150	37 - 39	527	450	230	76	70	30	153	9.4	53.2
10	170	40 - 42	580	500	244	76	77	33	160	12.1	73.3

CAD

Green Pin® Open Long Wedge Socket CP

Open wedge socket with longer wedge, wire rope clip and cotter pin



Scan for additional product details



- **Material:** high tensile steel
- **Standard:** generally to EN 13411-6
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes



G-6419

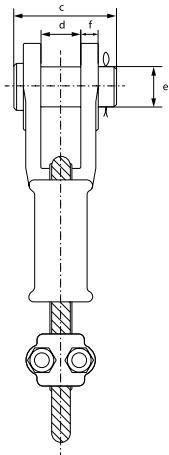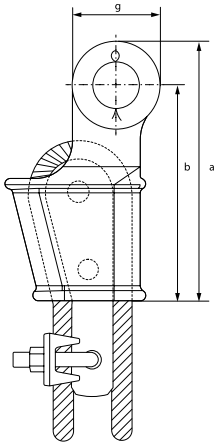

number	minimum breaking load	diameter wire rope	length	length to center pin	width	width inside	diameter pin	thickness side plates	diameter eye	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg	kg
0.5	12	9 - 10	165	142	62	20.5	21	11	46	0.17	1.88
1	20	11 - 13	175	146	66	25	25	12	57	0.26	3.02
2	25	14 - 16	211	176	82	31	30	15	70	0.47	5.16
3	40	18 - 19	252	212	95	38	35	16	80	0.74	8.80
4	55	20 - 22	288	240	110	44	41	19	95	1.19	12.8
5	75	24 - 26	329	274	130	51	51	22	110	2.16	18.30
6	90	27 - 29	375	310	144	57	57	25	130	2.95	23.7
7	110	30 - 32	423	350	155	63	64	28	146	4.02	33.9

CAD





Green Pin® Open Long Wedge Socket BN

Open wedge socket with longer wedge, wire rope clip and safety bolt

Scan for additional product details



G-6429

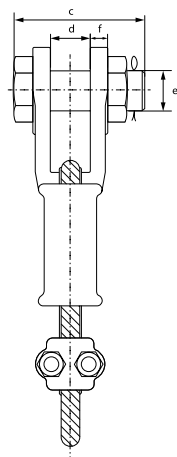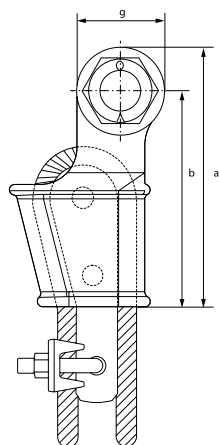

- **Material:** high tensile steel
- **Standard:** generally to EN 13411-6
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

number	minimum breaking load	diameter wire rope	length	length to center pin	width	width inside	diameter pin	thickness side plates	diameter eye	weight pin	weight each
	t	mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg	kg
0.5	12	9 - 10	165	142	83	20.5	20	11	46	0.32	2.02
1	20	11 - 13	175	146	101	25	25	12	57	0.61	3.88
2	25	14 - 16	211	176	124	31	30	15	70	1.08	5.77
3	40	18 - 19	252	212	138	38	35	16	80	1.59	9.65
4	55	20 - 22	288	240	148	44	41	19	95	2.25	13.8
5	75	24 - 26	329	274	176	51	50	22	110	4.06	20.2
6	90	27 - 29	375	310	193	57	57	25	130	5.51	26.3
7	110	30 - 32	423	350	210	63	63	28	146	7.44	37.4

CAD




Green Pin® Short Bow Socket



Closed spelter socket

- **Material:** cast alloy steel
- **Finish:** hot dipped galvanized
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details





G-6416

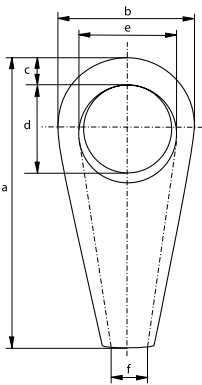

minimum breaking load	rope size	length	width	thicknes bow	length eye	width eye	opening	weight each
t	mm	a mm	b mm	c mm	d mm	e mm	f mm	kg
140	31-36	262	132	38	83	75	39	7
160	37-42	305	152	40	103	92	44	10
200	43-48	356	178	48	120	112	51	16
250	49-54	390	200	54	132	120	57	21
320	55-60	440	220	62	148	135	64	28
400	61-68	498	250	68	165	150	73	44
500	69-75	540	274	75	178	164	79	68
600	76-80	585	295	76	195	175	89	70
700	81-86	625	320	82	216	194	92	81
800	87-93	670	350	92	220	202	99	112
900	94-102	700	375	100	235	215	108	112
1000	108-115	800	420	110	270	240	120	182



S-6414

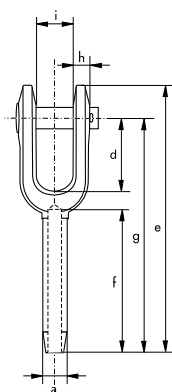

Green Pin® Open Swage Socket CP

Open type swage socket with cotter pin

- **Material:** drop forged steel C-1035
- **Finish:** self-coloured
- **Certification:** 2.1
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details



diameter rope	diameter before swage	diameter after swage		diameter inside	diameter pin	length	length	length	length	thickness	width inside	width eye	weight each
mm	a	min	max	b	c	d	e	f	g	h	i	j	kg
6	13	10.9	11.7	7	17	38	121	54	102	8	17	35	0.25
8	20	17.2	18	9	21	44	159	81	135	10	21	41	0.57
10	20	17.2	18	10	21	44	159	81	135	10	21	41	0.56
11	25	22	23.1	12	25	51	198	108	169	13	25	51	1.11
13	25	22	23.1	14	25	51	198	108	169	13	25	51	1.10
14	32	28.3	29.5	15	30	57	243	135	206	16	32	63	2.11
16	32	28.3	29.5	17	30	57	243	135	206	16	32	63	2.06
19	39	34.7	36.1	20	35	70	297	162	254	19	38	76	3.68
22	43	37.8	39.4	24	41	83	346	189	295	23	44	86	5.38
25	50	44.2	45.7	27	51	95	397	216	340	26	51	102	5.45
28	57	50.5	52.1	30	57	108	444	243	381	30	57	114	12
32	64	56.9	58.4	34	64	121	494	270	419	30	63	127	16.3
35	71	63.2	65	37	64	133	540	297	460	33	63	133	20.5
38	78	69.6	71.4	40	70	146	591	324	502	37	76	146	29.5
44	86	75.9	77.7	47	89	171	689	378	584	43	89	178	42.2
51	100	88.6	90.4	54	95	203	798	432	679	46	102	203	65.8
57	113	100.3	102.1	60	108	171	835	486	705	65	114	222	93.4
63	125	110.5	112.3	67	108	171	879	498	749	65	114	222	103
76	151	133.1	134.9	80	133	219	1045	603	905	76	146	241	181

INFO

Green Pin® Closed Swage Socket



Closed type

- **Material:** drop forged steel C-1035
- **Finish:** self-coloured
- **Certification:** 2.1
- **Article code:** scan QR code to see article codes

Scan for additional product details



S-6415



diameter rope	diameter before swage	diameter after swage		diameter inside	diameter	diameter eye	thickness	length	length	length	weight each
	a	min	max	b	c	d	e	f	g	h	kg
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
6	13	10.9	11.7	7	37	19	13	54	111	89	0.15
8	20	17.2	18	9	43	22	17	81	140	114	0.35
10	20	17.2	18	10	43	22	17	81	140	114	0.33
11	25	22	23.1	12	51	27	22	108	176	146	0.66
13	25	22	23.1	14	51	27	22	108	176	146	0.62
14	32	28.3	29.5	15	63	32	29	135	222	184	1.35
16	32	28.3	29.5	17	63	32	29	135	222	184	1.31
19	39	34.7	36.1	20	76	37	33	162	264	219	2.30
22	43	37.8	39.4	24	89	43	38	189	308	257	3.40
25	50	44.2	45.7	27	102	52	44	216	349	292	4.97
28	57	50.5	52.1	30	114	59	51	243	387	324	7.20
32	64	56.9	58.4	34	127	65	57	270	438	365	10.5
35	71	63.2	65	37	133	65	57	297	479	400	13.3
38	78	69.6	71.4	40	140	71	63	324	518	432	17.7
44	86	75.9	77.7	47	171	91	76	378	610	508	25.3
51	100	88.6	90.4	54	197	97	83	432	698	584	41
57	113	100.3	102.1	60	219	110	102	486	756	632	55.3
63	125	110.5	112.3	67	219	110	102	498	791	667	64.4
76	151	133.1	134.9	80	235	135	137	603	959	816	114

INFO