



YC Standard beam clamps

Working load limit (WLL) 1000 - 10000 kg

The YC beam clamp provides a quick and versatile rigging point for hoisting equipment, pulley blocks or loads and comes complete with a locking device. The unit offers flexible applications, due to the wide adjustment range. The central threaded spindle allows easy attachment and a safe and secure grip to the beam flange.

Product group: C4

INFO


This model must not be used for lifting. It is only to be used as a suspension point.

Technical data YC

Model	Art.-No.	WLL kg	Beam flange width mm	Weight kg
YC1	NO5406181	1000	75 - 230	3.8
YC2	NO5406182	2000	75 - 230	4.6
YC3	NO5407417	3000	80 - 320	9.2
YC5	NO5407418	5000	90 - 320	11.0
YC10	NO5407419	10000	90 - 320	17.2

Dimensions YC

Model	YC1	YC2	YC3	YC5	YC10
A min., mm	115	115	180	180	175
A max., mm	150	150	225	225	220
A1, mm	78	78	85	95	95
A2, mm	246	246	325	325	325
B1, mm	186	186	232	242	268
B2, mm	350	350	455	445	480
b1, mm	75	75	80	90	90
b2, mm	230	230	320	320	320
C, mm	50	50	70	70	70
D, mm	3	4	6	10	14
E, mm	215	215	255	255	275
F1, mm	34	35	35	35	35
F2, mm	17	18	21	21	20
G1, mm	82	82	120	116	110
G2, mm	44	44	75	75	66
H, mm	20	20	22	28	38
J1, mm	14	14	30	30	34
J2, mm	21	21	34	34	35
K1, mm	48	50	60	60	60
K2, mm	31	32	40	42	40
L, mm	80	86	114	129	146

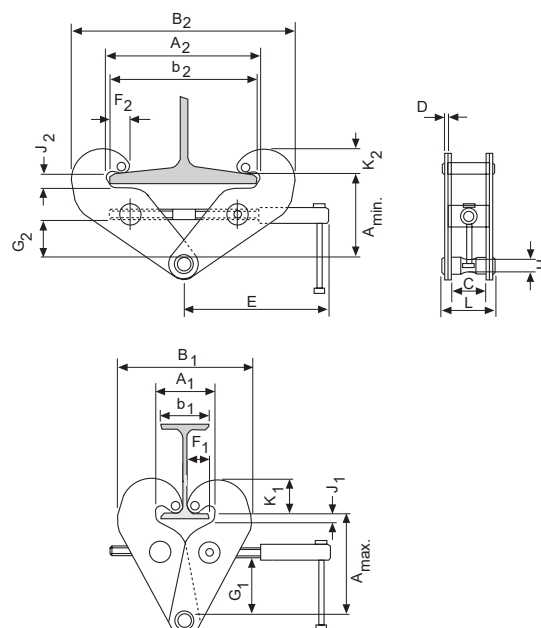

SC92 Beam clamps with shackle

Working load limit (WLL) 1000 - 20000 kg

The SC92 beam clamp provides a quick and versatile rigging point for hoisting equipment, pulley blocks or loads. The unit offers flexible applications due to the wide adjustment range. The shackle suspension allows easy attachment of lifting devices. The clamp offers a safe and secure grip to the beam flange.

Product group: C4

INFO

This model must not be used for lifting. It is a suspension point.



Technical data SC92

Model	Art.-No.	WLL kg	Beam flange width mm	Weight kg
SC92-1	N05400002	1000	75 - 210	5.0
SC92-2	N05400003	2000	75 - 210	6.0
SC92-3	N05400004	3000	100 - 270	8.0
SC92-3/L	N4300000237	3000	75 - 305	9.0
SC92-5	N05400005	5000	100 - 270	10.0
SC92-5/L	N4300000241	5000	75 - 305	12.0
SC92-10	N05400001	10000	75 - 305	19.0
SC92-15	N4300000232	15000	75 - 305	35.0
SC92-20	192027171	20000	300 - 410	87.0



BA Bulb bar anchors

Working load limit (WLL) 750 - 6000 kg

The BA bulb bar anchor has been designed for attachment to bulb profiles, often found in ship compartments and engine rooms. It provides a semi-permanent suspension point. The clamp can be quickly and easily attached via the screw mechanism.

The fabricated light weight design ensures a firm grip onto the bulb section. The unique large bow hook ring gives easy connection for all types of lifting equipment.

Product group: I2

Technical data BA

Model	Art.-No.	*WLL kg	Max. bulb hp	*Weight kg
BA0.75	N4300000023	750	80 - 160	3
BA1.5	N4300000020	1500	160 - 240	4
BA3.0	N4300000021	3000	240 - 320	5.5
BA6.0	N4300000022	6000	320 - 430	12.5

*Per clamp