




Green Pin® JJ Turnbuckle CP

Turnbuckle with jaw-jaw end-fitting and cotter pins, generally to ASTM F1145-92

Scan for additional product details



G-6313

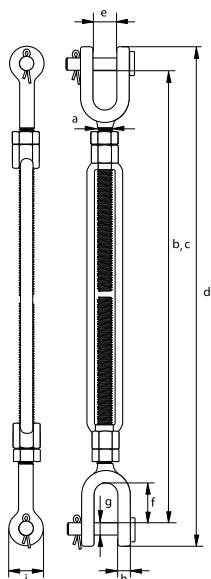

- **Material:** drop forged high tensile steel SAE 1035 or 1045
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC^a CE IIA
- **Article code:** scan QR code to see article codes

working load limit	diameter thread		take up	length closed position	length open position	length closed position	opening jaw	length inside	diameter pin	thickness jaw eye	diameter jaw eye	weight each
t	a inch	a mm	inch	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	kg
2.36	3/4	19	6	369	487	439	24	38	16	16	41	2.59
2.36	3/4	19	9	444	640	514	24	38	16	16	41	3.13
2.36	3/4	19	12	520	792	590	24	38	16	16	41	3.42
2.36	3/4	19	18	670	1096	740	24	38	16	16	41	4.51
3.27	7/8	22	12	561	826	638	27	42	19	19	48	4.93
3.27	7/8	22	18	713	1132	790	27	42	19	19	48	6.41
4.54	1	25	6	447	554	532	31	50	22	20	54	5.18
4.54	1	25	12	598	859	683	31	50	22	20	54	6.43
4.54	1	25	18	750	1168	835	31	50	22	20	54	8.08
4.5	1	25	24	903	1470	988	31	50	22	20	54	8.56
6.9	1 1/4	32	12	641	914	748	44	71	29	26	68	11.2
6.9	1 1/4	32	18	803	1228	910	44	71	29	26	68	13.6
6.9	1 1/4	32	24	962	1539	1069	44	71	29	26	68	15
9.71	1 1/2	38	12	675	942	806	52	71	35	28	80	17.1
9.71	1 1/2	38	18	825	1244	956	52	71	35	28	80	19.3
9.71	1 1/2	38	24	980	1551	1111	52	71	35	28	80	21.8
12.7	1 3/4	45	18	938	1316	1092	60	86	41	33	90	27.3
12.7	1 3/4	45	24	1089	1621	1243	60	86	41	33	90	31.7
16.8	2	50	24	1151	1671	1338	63	93	51	40	107	49
27.2	2 1/2	64	24	1255	1831	1480	75	114	57	41	143	88
34	2 3/4	69	24	1348	1882	1604	90	110	70	41	158	103

CAD INFO


Green Pin® JJ Turnbuckle BN

Turnbuckle with jaw-jaw end-fitting and safety bolt, generally to ASTM F1145-92

Scan for additional product details



G-6323

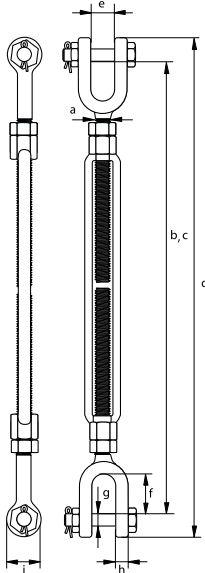


- **Material:** drop forged high tensile steel SAE 1035 or 1045
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC³ CE IIA
- **Article code:** scan QR code to see article codes

working load limit	diameter thread		take up	length closed position	length open position	length closed position	opening jaw	length inside	diameter pin	thickness jaw eye	diameter jaw eye	weight each
t	a inch	a mm	inch	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	kg
0.54	³ / ₈	10	6	273	409	304	12	21	7	9	21	0.55
1	¹ / ₂	12	6	304	435	343	16	26	10	11	25	0.97
1	¹ / ₂	12	9	379	588	418	16	26	10	11	25	1.15
1	¹ / ₂	12	12	455	740	494	16	26	10	11	25	1.46
1.59	⁵ / ₈	16	6	346	469	406	18	32	13	14	33	1.75
1.59	⁵ / ₈	16	9	421	622	480	18	32	13	14	33	2.14
1.59	⁵ / ₈	16	12	498	774	557	18	32	13	14	33	2.43
2.36	³ / ₄	19	6	369	487	439	24	38	16	16	41	2.70
2.36	³ / ₄	19	9	444	640	514	24	38	16	16	41	3.23
2.36	³ / ₄	19	12	520	792	590	24	38	16	16	41	3.57
2.36	³ / ₄	19	18	670	1096	740	24	38	16	16	41	4.55
3.27	⁷ / ₈	22	12	561	826	638	27	42	19	19	48	5.22
3.27	⁷ / ₈	22	18	713	1132	790	27	42	19	19	48	6.56
4.54	1	25	6	447	554	532	31	50	22	20	54	5.54
4.54	1	25	12	598	859	683	31	50	22	20	54	6.70
4.54	1	25	18	750	1168	835	31	50	22	20	54	8.61
4.5	1	25	24	903	1470	988	31	50	22	20	54	8.87
6.9	1 ¹ / ₄	32	12	643	916	748	44	71	28	26	68	11.9
6.9	1 ¹ / ₄	32	18	805	1230	910	44	71	28	26	68	13.6
6.9	1 ¹ / ₄	32	24	964	1541	1069	44	71	28	26	68	14.2
9.71	1 ¹ / ₂	38	12	675	942	806	52	71	35	28	80	18.5
9.71	1 ¹ / ₂	38	18	825	1244	956	52	71	35	28	80	19.3
9.71	1 ¹ / ₂	38	24	980	1551	1111	52	71	35	28	80	22
12.7	1 ³ / ₄	45	18	938	1316	1092	60	86	41	33	90	29
12.7	1 ³ / ₄	45	24	1089	1621	1243	60	86	41	33	90	33
16.8	2	50	24	1153	1673	1338	63	93	50	40	107	50
27.2	2 ¹ / ₂	64	24	1255	1831	1480	75	114	57	41	143	88
34	2 ³ / ₄	69	24	1348	1882	1604	90	110	70	41	158	109

CAD INFO



G-6333

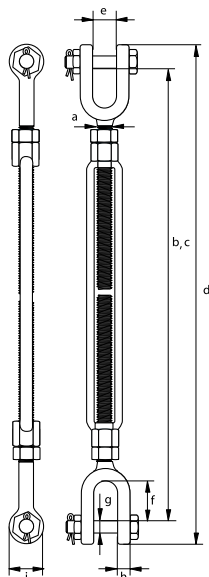

Green Pin Polar® JJ Turnbuckle BN

Grade 8 turnbuckle with jaw-jaw end-fitting and safety bolt for use under low temperatures, generally to ASTM F1145-92

- **Material:** drop forged alloy steel, grade 8, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** ASME B30.26 generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish:** hot dipped galvanized
- **Temperature Range:** -40 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC^a CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** jaw ends up to and including $\frac{5}{8}$ " are fitted with bolts and nuts, sizes $\frac{3}{4}$ " and up are equipped with bolts, nuts and cotter pins



working load limit	diameter thread		take up	length closed position	length open position	length closed position	opening jaw	length inside	diameter pin	thickness jaw eye	diameter jaw eye	weight each
t	a inch	a mm	inch	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	kg
1	$\frac{1}{2}$	12	12	455	740	494	16	26	10	11	25	1.38
1.59	$\frac{5}{8}$	16	12	498	774	557	18	32	13	14	33	2.32
2.36	$\frac{3}{4}$	19	18	670	1096	740	24	38	16	16	41	4.57
3.27	$\frac{7}{8}$	22	18	713	1132	790	27	42	19	19	48	6.50
4.54	1	25	18	750	1168	835	31	50	22	20	54	8.40
6.9	$1 \frac{1}{4}$	32	18	805	1230	910	44	71	28	26	68	13.6
9.71	$1 \frac{1}{2}$	38	18	825	1244	956	52	71	35	28	80	21.1
12.7	$1 \frac{3}{4}$	45	18	938	1316	1092	60	86	41	33	90	30

CAD INFO

Green Pin® EE Turnbuckle

Turnbuckle with eye-eye end-fitting,
generally to ASTM F1145-92


Scan for
additional
product
details



- **Material:** drop forged high tensile steel SAE 1035 or 1045
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC³ CE IIA
- **Article code:** scan QR code to see article codes



G-6311

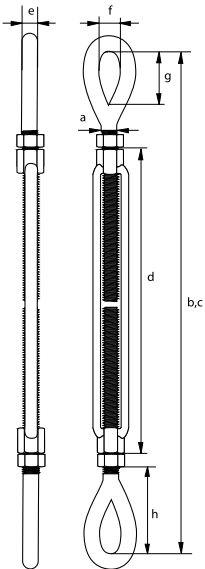

working load limit	diameter thread		take up	length closed position	length open position	length	diameter	width inside	length inside	length closed position	weight each
t	a inch	a mm	inch	b mm	c mm	d mm	e mm	f mm	g mm	h mm	kg
0.54	³ / ₈	10	6	292	428	183	10	13	29	49	0.48
1	¹ / ₂	12	6	325	455	193	12	18	36	58	0.81
1	¹ / ₂	12	9	400	608	270	12	18	36	57	1.07
1	¹ / ₂	12	12	476	760	346	12	18	36	57	1.29
1.59	⁵ / ₈	16	6	380	503	203	14	21	45	79	1.33
1.59	⁵ / ₈	16	9	455	656	280	14	21	45	78	1.61
1.59	⁵ / ₈	16	12	531	808	356	14	21	45	78	1.96
2.36	³ / ₄	19	6	413	532	214	17	26	54	89	2.03
2.36	³ / ₄	19	9	490	685	291	17	26	54	89	2.47
2.36	³ / ₄	19	12	564	837	367	17	26	54	88	2.90
2.36	³ / ₄	19	18	718	1143	519	17	26	54	89	3.94
3.27	⁷ / ₈	22	12	604	870	377	20	32	61	101	4.31
3.27	⁷ / ₈	22	18	756	1174	529	20	32	61	101	5.51
4.54	1	25	6	498	604	234	24	37	76	118	4.23
4.54	1	25	12	649	909	387	24	37	76	117	5.75
4.54	1	25	18	801	1215	539	24	37	76	117	7.27
4.5	1	25	24	952	1518	692	24	37	76	116	7.80
6.9	1 ¹ / ₄	32	12	712	985	385	29	47	91	145	9.28
6.9	1 ¹ / ₄	32	18	862	1287	537	29	47	91	144	11.1
6.9	1 ¹ / ₄	32	24	1015	1592	690	29	47	91	144	12.1
9.71	1 ¹ / ₂	38	12	756	1023	401	32	55	106	156	12.6
9.71	1 ¹ / ₂	38	18	916	1335	553	32	55	106	160	15.8
9.71	1 ¹ / ₂	38	24	1065	1636	706	32	55	106	158	17.3
12.7	1 ³ / ₄	45	18	1020	1396	577	38	61	120	197	23.9
12.7	1 ³ / ₄	45	24	1171	1703	730	38	61	120	196	26.7
16.8	2	50	24	1264	1784	748	46	69	147	230	38.3
27.2	2 ¹ / ₂	64	24	1430	1934	802	51	80	165	274	65
34	2 ³ / ₄	69	24	1450	1988	802	57	84	178	284	84

CAD INFO




Green Pin® HH Turnbuckle

Turnbuckle with hook-hook end-fitting,
generally to ASTM1145-92

Scan for
additional
product
details



G-6312

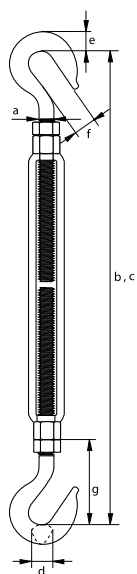

- **Material:** drop forged high tensile steel SAE 1035 or 1045
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC^a CE IIA
- **Article code:** scan QR code to see article codes

working load limit	diameter thread		take up	length closed position	length open position	thickness hook	thickness hook	opening hook	length closed position	weight each
t	a inch	a mm	inch	b mm	c mm	d mm	e mm	f mm	g mm	kg
0.54	³ / ₈	10	6	278	415	13	16	15	42	0.53
1	¹ / ₂	12	6	305	434	16	22	16	48	0.93
1	¹ / ₂	12	9	380	587	16	22	16	47	1.16
0.68	¹ / ₂	12	12	456	739	13	19	16	47	1.34
1.59	⁵ / ₈	16	6	356	479	16	23	21	67	1.40
1.59	⁵ / ₈	16	9	431	632	20	24	21	66	1.96
1.59	⁵ / ₈	16	12	507	784	16	23	21	66	1.79
2.36	³ / ₄	19	6	393	511	22	27	24	79	2.04
1.36	³ / ₄	19	9	468	664	20	27	24	78	2.49
2.36	³ / ₄	19	12	544	816	22	27	24	78	3.27
4.54	1	25	6	479	586	26	35	31	109	4.23
4.54	1	25	12	625	886	26	35	31	106	6.64
2.27	1	25	18	778	1191	26	35	31	106	6.50
2.27	1	25	24	928	1495	26	35	31	105	8.13

CAD INFO

Green Pin® EJ Turnbuckle

Turnbuckle with eye-jaw end-fitting and cotter pin or safety bolt (depending on size), generally to ASTM1145-92


Scan for
additional
product
details



- **Material:** drop forged high tensile steel SAE 1035 or 1045
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC³ CE IIA
- **Article code:** scan QR code to see article codes



G-6315

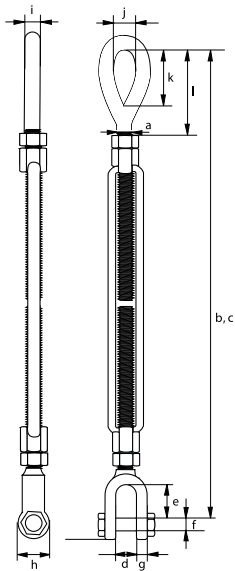

working load limit	diameter thread		take up	length closed position	length open position	opening jaw	length inside jaw	diameter pin jaw	thickness eye jaw	diameter eye jaw	diameter eye	width inside eye	length inside eye	length closed position	weight each
t	a inch	a mm	inch	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	l mm	kg
0.54	³ / ₈	10	6	283	418	12	21	8	9	21	10	13	29	49	0.52
1	¹ / ₂	12	6	315	446	16	26	10	11	25	12	18	36	58	0.88
1	¹ / ₂	12	9	390	598	16	26	10	11	25	12	18	36	57	1.13
1	¹ / ₂	12	12	466	751	16	26	10	11	25	12	18	36	57	1.37
1.59	⁵ / ₈	16	6	363	486	18	32	13	14	33	14	21	45	79	1.55
1.59	⁵ / ₈	16	9	438	639	18	32	13	14	33	14	21	45	78	1.61
1.59	⁵ / ₈	16	12	514	790	18	32	13	14	33	14	21	45	78	2.17
2.36	³ / ₄	19	6	391	510	24	38	16	16	41	17	26	54	89	2.28
2.36	³ / ₄	19	9	467	663	24	38	16	16	41	17	26	54	89	2.82
2.36	³ / ₄	19	12	542	815	24	38	16	16	41	17	26	54	88	3.16
2.36	³ / ₄	19	18	694	1120	24	38	16	16	41	17	26	54	89	4.10
3.27	⁷ / ₈	22	12	583	848	27	42	19	19	48	20	32	61	101	4.10
3.27	⁷ / ₈	22	18	735	1153	27	42	19	19	48	20	32	61	101	5.84
4.54	1	25	6	473	579	31	50	22	20	54	24	37	76	118	4.60
4.54	1	25	12	624	884	31	50	22	20	54	24	37	76	117	6.17
4.54	1	25	18	776	1190	31	50	22	20	54	24	37	76	117	7.10
4.5	1	25	24	928	1494	31	50	22	20	54	24	37	76	116	8.35
6.9	1 ¹ / ₄	32	12	677	950	44	71	29	26	68	29	47	91	145	10.4
6.9	1 ¹ / ₄	32	18	833	1258	44	71	29	26	68	29	47	91	144	11.5
6.9	1 ¹ / ₄	32	24	989	1566	44	71	29	26	68	29	47	91	144	13.2
9.71	1 ¹ / ₂	38	12	716	983	52	71	35	28	80	32	55	106	156	13.9
9.71	1 ¹ / ₂	38	18	871	1290	52	71	35	28	80	32	55	106	160	16.7
9.71	1 ¹ / ₂	38	24	1023	1594	52	71	35	28	80	32	55	106	158	19.7
12.7	1 ³ / ₄	45	18	979	1356	60	86	41	33	90	38	61	120	197	25.1
12.7	1 ³ / ₄	45	24	1130	1662	60	86	41	33	90	38	61	120	196	29
16.8	2	50	24	1208	1728	63	93	51	40	107	46	69	147	230	42
27.2	2 ¹ / ₂	64	24	1343	1899	75	114	57	41	143	51	80	165	274	68.5
34	2 ³ / ₄	69	24	1399	1953	90	110	70	41	158	57	84	178	284	93

CAD INFO




Green Pin® EH Turnbuckle

Turnbuckle with eye-hook end-fitting,
generally to ASTM F1145-92

Scan for
additional
product
details



G-6314

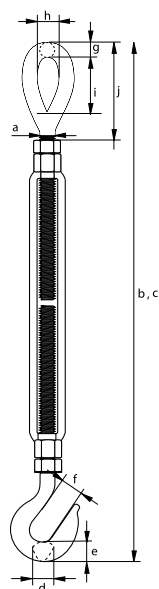

- **Material:** drop forged high tensile steel SAE 1035 or 1045
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC^a CE IIA
- **Article code:** scan QR code to see article codes

working load limit	diameter thread		take up	length closed position	length open position	thickness hook	thickness hook	opening hook	diameter eye	width inside eye	length inside eye	length closed position	weight each
t	a inch	a mm	inch	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	kg
0.54	³ / ₈	10	6	285	422	13	16	15	10	13	29	49	0.40
1	¹ / ₂	12	6	315	445	16	22	16	12	18	36	58	0.73
1	¹ / ₂	12	9	390	598	16	22	16	12	18	36	57	0.89
0.68	¹ / ₂	12	12	466	750	13	19	16	12	18	36	57	1.05
1.59	⁵ / ₈	16	6	368	491	16	23	21	14	21	45	79	1.11
1.59	⁵ / ₈	16	9	443	644	20	24	21	14	21	45	78	1.39
1.59	⁵ / ₈	16	12	519	796	16	23	21	14	21	45	78	1.79
2.36	³ / ₄	19	6	403	521	22	27	24	17	26	54	89	1.83
1.36	³ / ₄	19	9	479	675	20	27	24	17	26	54	89	2.30
2.36	³ / ₄	19	12	554	827	22	27	24	17	26	54	88	2.30
4.54	1	25	6	488	595	26	35	31	24	36	75	118	3.90
4.54	1	25	12	636	897	26	35	31	24	36	75	117	5.48
2.27	1	25	18	789	1202	26	35	31	24	36	75	117	6
2.27	1	25	24	939	1506	26	35	31	24	36	75	116	7.52

CAD INFO

C


Rigging screws Eye-Eye

According to DIN 1480

- **Material:** drop forged mild steel
- **Standard:** DIN 1480
- **Finish:** electro-galvanized
- **Certification:** 2.1



E-6351

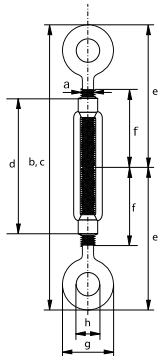

diameter thread	length closed position	length open position	length body	length end fitting	length thread	diameter eye outside	diameter eye inside	weight each
a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	kg
5	114	170	70	57	35	16	8	0.07
6	160	246	110	80	55	20	9	0.11
8	168	248	110	84	57	22	10	0.2
10	210	300	125	105	68	31	14	0.28
12	222	305	125	110	70	35	16	0.43
14	244	334	140	123	75	40	18	0.61
16	300	416	170	143	88	47	22	1
20	334	466	200	165	105	52	24	1.60
22	372	527	220	185	118	60	27	2.20
24	410	587	255	208	135	65	27	2.80
30	440	605	255	220	135	71	31	4.10
33	490	690	295	245	148	88	36	6
36	554	740	295	277	158	94	38	8.50
42	600	800	330	300	170	110	49	11

C


Rigging screws Hook-Hook

According to DIN 1480

- **Material:** drop forged mild steel
- **Standard:** DIN 1480
- **Finish:** electro-galvanized
- **Certification:** 2.1



E-6352




diameter thread	length closed position	length open position	length body	length end fitting	length thread	opening hook	thickness hook	weight each
a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	kg
6	184	270	110	92	55	8	15	0.11
8	200	280	110	100	57	10.5	15	0.20
10	234	323	125	117	68	13	11	0.28
12	260	343	125	130	70	16	13	0.43
14	278	368	140	139	75	18	15	0.61
16	322	438	170	161	88	20	17	1
20	382	514	200	191	105	21	21	1.60
22	456	601	220	228	118	24	28	2.20
24	496	673	255	248	135	26	33	2.80
30	550	715	255	275	135	34	35	4.10
33	600	799	295	300	148	38	40	6
36	640	825	295	320	158	46	45	8.30

C



E-6354

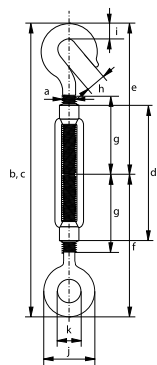

Rigging screws Eye-Hook

According to DIN 1480


- **Material:** drop forged mild steel
- **Standard:** DIN 1480
- **Finish:** electro-galvanized
- **Certification:** 2.1

diameter thread	length closed position	length open position	length body	length end fitting	length end fitting	length thread	opening hook	thickness hook	diameter eye outside	diameter eye inside	weight each
a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	kg
5	125	180	70	56	57	35	7	12	16	8	0.07
6	172	258	110	77	80	55	8	15	20	9	0.11
8	184	264	110	85	84	57	10.5	15	22	10	0.20
10	222	311	125	106	105	68	13	11	31	14	0.28
12	241	324	125	117	111	70	16	13	35	16	0.43
14	261	351	140	124	122	75	18	15	40	18	0.61
16	311	427	170	144	150	88	20	17	47	22	1
20	358	490	200	170	167	105	21	21	52	24	1.60
22	414	559	220	200	186	118	24	28	60	27	2.20
24	453	630	255	215	205	135	26	33	65	27	2.80
30	495	660	255	240	220	135	34	35	71	31	4.10
33	545	744	295	260	245	148	38	40	88	36	6
36	597	782	295	275	277	158	46	45	94	38	8.40

C



E-6353

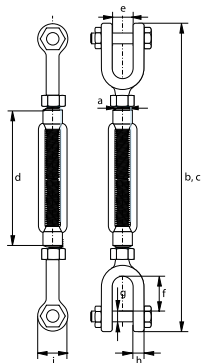

Rigging screws Jaw-Jaw

According to DIN 1480

- **Material:** drop forged mild steel
- **Standard:** DIN 1480
- **Finish:** electro-galvanized
- **Note:** supplied with locking nuts
- **Certification:** 2.1

diameter thread	length closed position	length open position	length body	opening jaw	length inside	diameter pin	thickness jaw eye	diameter jaw eye	weight each
a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	kg
6	191	277	110	7.5	12	M 6	5	13	0.16
8	194	274	110	8.5	12	M 6	6	14	0.21
10	236	325	125	11	16	M 8	8	18	0.38
12	266	349	125	13	20	M 10	10	24	0.66
14	316	406	140	16	30	M 12	12	28	1.15
16	374	490	170	18	38	M 12	12	32	1.45
20	438	570	200	20	42	M 16	16	38	2.61
22	466	611	220	22	44	M 18	18	40	3.24
24	514	691	255	24	46	M 20	20	42	4.35
30	544	709	255	30	50	M 24	22	46	6.48

C


Rigging screws with Welding Ends

According to DIN 1480

- **Material:** drop forged mild steel
- **Standard:** DIN 1480
- **Finish:** Body: electro-galvanized
Welding ends: self-coloured
- **Certification:** 2.1



E-6355



diameter thread	length closed position	length open position	length body	length body inside	length stub-ends	length thread	weight per 100 pcs
a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg
6	240	326	110	86	120	65	9.30
8	240	320	110	80	120	65	14
10	300	389	125	89	150	75	29
12	300	383	125	83	150	75	40
14	330	420	140	90	165	85	66
16	400	516	170	116	200	100	89
20	440	572	200	132	220	120	160
22	440	585	220	145	220	130	227
24	520	697	255	177	260	150	282
30	520	685	255	165	260	160	423
36	600	780	295	185	300	180	710

C


Turnbuckles (hamburgers)

For deck lashing

- **Material:** mild steel
- **Finish:** self-coloured
- **Certification:** 2.1



S-6330




minimum breaking load	diameter thread	length thread	diameter bow	length bow	weight each
t	a mm	b mm	c mm	d mm	kg
13	24	400	16	210	2.80
18	27	400	18	210	4.40
20	30	400	20	210	5
21	36	400	20	210	7

C



G-6343

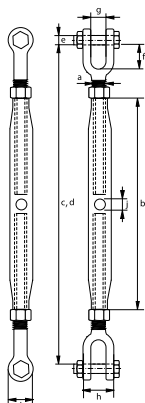


Closed body rigging screws Jaw-Jaw


- **Material:** mild steel
- **Safety factor:** MBL equals 5 x WLL,
- **Finish:** hot dipped galvanized
- **Certification:** 2.1 2.2 CE IIA
- **Note:** end fittings of 6 and 8 mm rigging screws are electro-galvanized

working load limit	diameter thread	length body	length closed position	length open position	diameter pin	length inside	opening jaw	width jaw	diameter jaw eye	diameter hole	weight each
t	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	kg
0.2	6	100	170	250	5	19	7	20	13	6	0.15
0.32	8	108	199	279	6	25	9	24	14	8	0.26
0.5	10	125	222	312	8	26	10.5	28	19	8	0.45
0.7	12	195	315	470	10	32	13	34	23	10	0.85
1.2	16	230	388	568	12	39	18	42	29	11	1.51
1.5	20	270	449	654	16	46	20	51	33	12	2.62
2.2	22	295	490	715	20	55	25	55	38	12	3.94
3.2	24	325	538	793	22	63	30	70	46	12	5.16
4.8	33	370	680	965	30	85	38	82	60	14	11.6
6	39	400	707	1002	33	86	45	85	76	15	14.2
8.5	45	400	761	1011	39	105	50	94	85	16	20.8
11	48	400	780	1005	45	119	58	98	92	16	24

C



G-6340



Closed body rigging screws Eye-Eye

- **Material:** mild steel
- **Safety factor:** MBL equals 5 x WLL,
- **Finish:** hot dipped galvanized
- **Certification:** 2.1 2.2 CE IIA
- **Note:** end fittings of 6 and 8 mm rigging screws are electro-galvanized


working load limit	diameter thread	length body	length closed position	length open position	diameter	length eye inside	width eye inside	diameter hole	weight each
t	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	kg
0.2	6	100	160	240	5.5	11	11	6	0.12
0.32	8	108	175	255	6	12	12	8	0.19
0.5	10	125	205	300	8.5	13	13	8	0.34
0.7	12	195	298	458	11	19	15	10	0.77
1.2	16	230	356	531	12	28	20	11	1.31
1.5	20	270	423	628	16	34	24	12	2.36
2.2	22	295	463	688	16	34	24	12	2.94
3.2	24	325	502	752	19	37	28	12	3.86
4.8	33	370	602	882	29	41	35	14	8.95
6	39	400	651	951	35	45	40	15	11
8.5*	45	400	721	897	31	49	49	16	13.4
11*	48	400	767	1032	37	52	52	16	17.9

* Different design

C



G-6345

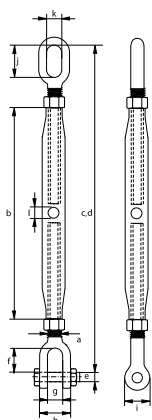

Closed body rigging screws Eye-Jaw

- **Material:** mild steel
- **Safety factor:** MBL equals 5 x WLL,
- **Finish:** hot dipped galvanized
- **Certification:** 2.1 2.2 CE IIA
- **Note:** end fittings of 6 and 8 mm rigging screws are electro-galvanized

working load limit	diameter thread	length body	length closed position	length open position	diameter pin	length jaw inside	opening jaw	width jaw	diameter jaw eye	length eye inside	width eye inside	diameter hole	weight each
t	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	l mm	kg
0.2	6	100	165	245	5	19	7	20	13	11	11	6	0.14
0.32	8	108	187	267	6	25	9	24	14	12	12	8	0.24
0.5	10	125	214	306	8	26	10.5	28	19	13	13	8	0.53
0.7	12	195	307	464	10	32	13	34	23	19	15	10	0.83
1.2	16	230	372	549	12	39	18	42	29	28	20	11	1.49
1.5	20	270	436	641	16	46	20	51	33	34	24	12	2.54
2.2	22	295	477	701	20	55	25	55	38	34	24	12	3.34
3.2	24	325	520	772	22	63	30	70	46	37	28	12	4.65
4.8	33	370	641	923	30	85	38	82	60	41	35	14	10.5
6	39	400	679	976	33	86	45	85	76	45	40	15	12.8
8.5*	45	400	741	945	39	105	50	94	85	49	49	16	20.8
11*	48	400	774	1018	45	119	58	98	92	52	52	16	24

* Different design