



SKALA

FA 40 909 20 (2 m)
FA 40 909 40 (4 m)
FA 40 909 100 (10 m)
FA 40 909 150 (15 m)
FA 40 909 250 (25 m)

COMING SOON



ANTICUT ROPE



55 cm
openable
protection
sleeve



EN 358 + EN 795 Type B + EN 795 Type C + EN 353-2

VYSKA

FA 40 906 50
FA 40 906 100




55 cm
openable
protection
sleeve




EN 358 + EN 795 Type B + EN 795 Type C




EN 358

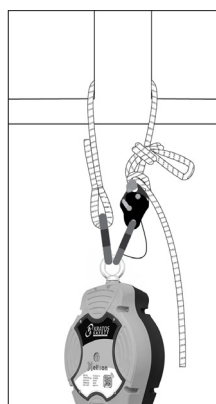

EN 795 Type B

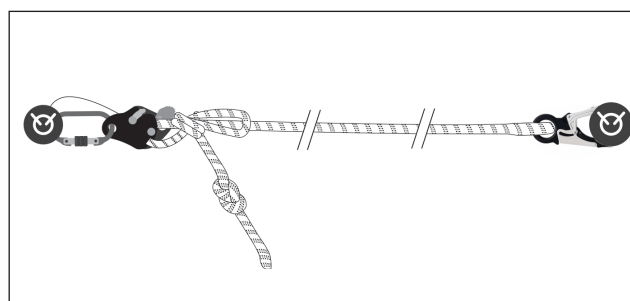

EN 795 Type C

REF.	FA 40 909 20 FA 40 909 40 FA 40 909 100 FA 40 909 150 FA 40 909 250					FA 40 906 50 FA 40 906 100	
MAX. LG.	2.0 m	4.0 m	10.0 m	15.0 m	25.0 m	5.0 m	10.0 m
CE UK CA	EN 358, EN 795 Type B & C, EN 353-2					EN 358, EN 795 Type B & C	
MAT.	● PA 11 mm					● PA 12 mm	
	  QUARTER / DOUBLE ACTION					  QUARTER / DOUBLE ACTION	
MAT.	 					 	
Kg	0.75 KG	0.77 KG	1.55 KG	2.10 KG	3.05 KG	0.75 KG	1.60 KG

SILVA 1

FA 40 504 10
FA 40 504 15
FA 40 504 20



SILVA 2

FA 40 601 10
FA 40 601 15



REF.	FA 40 504 XX	FA 40 601 XX
LG.	1.0 m 1.5 m 2.0 m	1.0 m 1.5 m
 	EN 354	EN 354
MAT.	 PA 11 mm	 PA 11 mm
	 QUARTER / DOUBLE ACTION	 QUARTER / DOUBLE ACTION
R (kN)	22 kN	22 kN
	0.74 KG 0.78 KG 0.83 KG	1.29 KG 1.36 KG


TiWA

FA 40 909 30A
FA 40 909 50A


COMING SOON




EN 358 + EN 795 Type B + EN 795 Type C

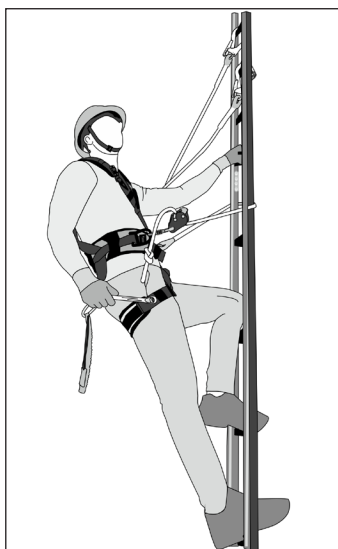

EN 358

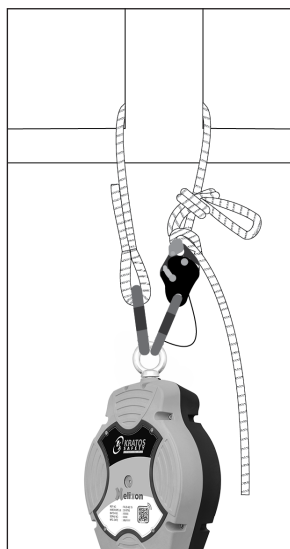

EN 795 Type B

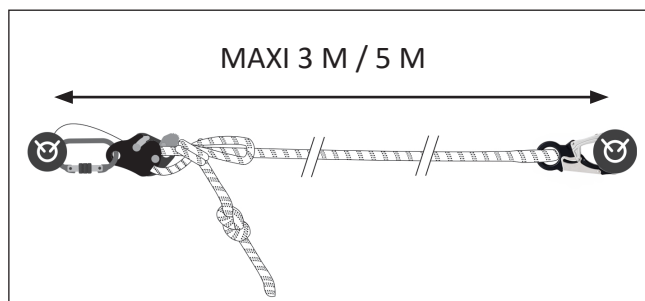

MAXI 3 M / 5 M

EN 795 Type C

REF.

FA 40 909 30A | FA 40 909 50A

MAX. LG.

3.0 m | 5.0 m



EN 358, EN 795 Type B & C

MAT.

PA 11 mm



ALU
QUARTER / DOUBLE ACTION

MAT.



ALU



0.92 KG | 1.10 KG

ASTRA

FA 40 908 20
FA 40 908 40

NEW



EN 358

REF.	FA 40 908 20 FA 40 908 40	
MAX. LG.	2.0 m	4.0 m
 	EN 358	
MAT.	 PA 11 mm	
	 QUARTER / DOUBLE ACTION	
MAT. 		
	0.73 KG 0.93 KG	

FA 40 900 20



FA 40 901 20



REF.	FA 40 900 20	FA 40 901 20
LG. (MIN. / MAX.)	1.2 m / 2.0 m	1.2 m / 2.0 m
CE UK CA	EN 358	EN 358
MAT.	PA 14 mm	30 mm PES
		
MAT. 		
Kg	0.81 KG	0.47 KG

FA 40 902 20



FA 40 903 20 FA 40 903 40



REF.	FA 40 902 20	FA 40 903 XX
LG. (MIN. / MAX.)	1.2 m / 2.0 m	0.6 m / 2.0 m 1.5 m / 4.0 m
CE UK CA	EN 358	EN 358
MAT.	PA 11 mm	PA 12 mm
		
MAT. 		
Kg	0.69 KG	0.99 KG 1.30 KG

FA 40 500 10
FA 40 500 15
FA 40 500 20



FA 40 502 10
FA 40 502 15
FA 40 502 20




REF.	FA 40 500 XX	FA 40 502 XX
LG.	1.0 m 1.5 m 1.8 m	1.0 m 1.5 m 1.8 m
CE UK CA	EN 354	EN 354
MAT.	PA 11 mm	PA 11 mm

R (kN)	22 kN	22 kN
	0.17 KG 0.20 KG 0.23 KG	0.66 KG 0.69 KG 0.72 KG

FA 40 503 10
FA 40 503 15
FA 40 503 20



FA 40 600 10
FA 40 600 15

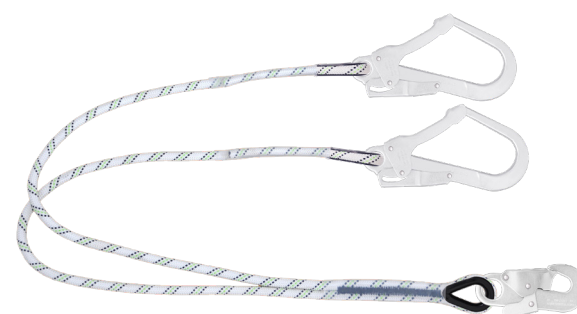

REF.	FA 40 503 XX	FA 40 600 XX
LG.	1.0 m 1.5 m 2.0 m	1.0 m 1.5 m
CE UK CA	EN 354	EN 354
MAT.	PA 11 mm	PA 11 mm
R (kN)	22 kN	22 kN
	0.89 KG 0.91 KG 0.93 KG	1.45 KG 1.48 KG

CONNECTEURS
CONNECTORS
CONECTORES
CONNETTORI
VERBINDUNGSELEMENTE

