

ANTICHUTES COULISSANTS
GUIDED TYPE FALL ARRESTERS
ANTICAÍDAS DESLIZANTES
ANTICADUTA SCORREVOLI
MITLAUFENDE ABSTURZSICHERUNG




BLOCKER EVO

FA 20 103 00D


NEW



EN 12841 + **FA 70 011 99 (p.157)**



FA 20 103 10
FA 20 103 15
FA 20 103 20
FA 20 103 30
FA 20 103 40
FA 20 103 50

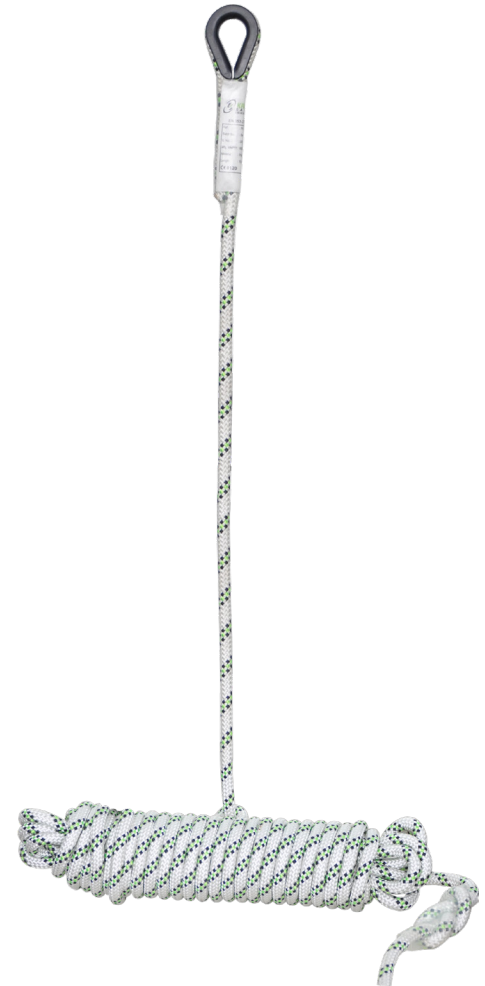



REF.	FA 20 103 00D	FA 20 103 XX
LG.	---	10 m 15 m 20 m 30 m 40 m 50 m
KG	140 KG	---
	EN 353-2	EN 353-2
MAT.		PA 11 mm
	YES	---

R (kN)	15 kN	15 kN
+	EN 353-2: 200 Kg in rescue only EN 12841 Type A	---
	0.35 KG	10 m : 1.50 KG 15 m : 1.75 KG 20 m : 2.55 KG 30 m : 3.60 KG 40 m : 4.65 KG 50 m : 5.70 KG

FA 20 113 30
FA 20 113 50



1. FA 20 103 00D	EN 353-2, EN 12841 A
2. FA 20 103 30 (30 m) / FA 20 103 50 (50 m)	EN 353-2
3. FA 50 301 23 (x3)	EN 362
4. FA 60 005 15 (x2)	EN 795 Type B
5. FA 60 029 05	EN 795 Type B
6. FA 70 021 00	EN 341 2A, EN 12841 C
7. FA 90 105 00	---

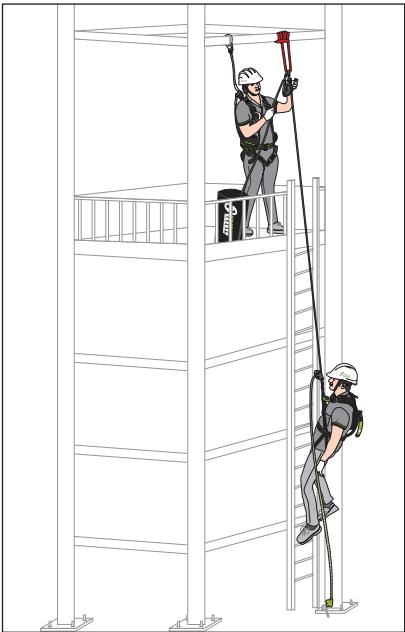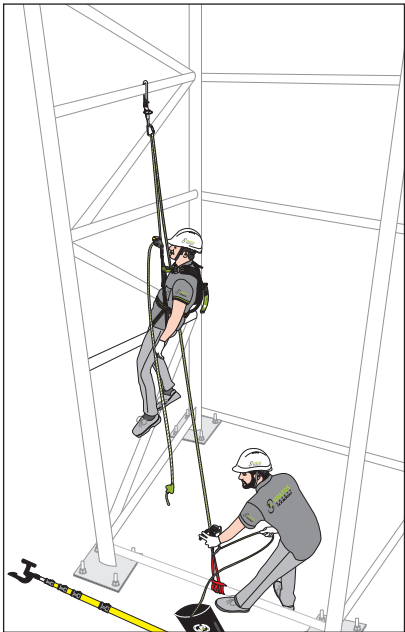

REF.	FA 20 113 30	FA 20 113 50
LG.	30 m	50 m
KG	140 KG	
CE UK CA	EN 353-2, EN 341, EN 12841, EN 362, EN 795	
Kg	6.68 KG	8.78 KG



NiRO-S

NEW

FA 20 102 10A
FA 20 102 15A
FA 20 102 20A
FA 20 102 30A
FA 20 102 40A
FA 20 102 50A



LOREL-A

FA 20 103 10C
FA 20 103 20C



REMOVABLE

FA 20 103 00ABS



EN 353-2	100 kg		
EN 353-2	140 kg		
EN 358	140 kg		

REF.	FA 20 102 XXA	FA 20 103 10C FA 20 103 20C
LG.	10 m 15 m 20 m 30 m 40 m 50 m	10 m 20 m
KG	140 KG	140 KG
CE UK CA	EN 353-2	EN 353-2, EN 358
MAT.	INOX / PES 12 mm	ALU / PA 11 mm
	NO	NO
	STEEL QUARTER	STEEL QUARTER
R (kN)	15 kN	15 kN
+	PPE-R 11.075	---
Kg	10 m : 1.88 KG 15 m : 2.68 KG 20 m : 3.03 KG 30 m : 4.03 KG 40 m : 4.83 KG 50 m : 5.78 KG	2.10 KG 3.15 KG


BLOCKER

FA 20 103 00A




EN 12841 +

FA 70 011 99 (p. 157)




FA 20 103 10
FA 20 103 15
FA 20 103 20
FA 20 103 30
FA 20 103 40
FA 20 103 50

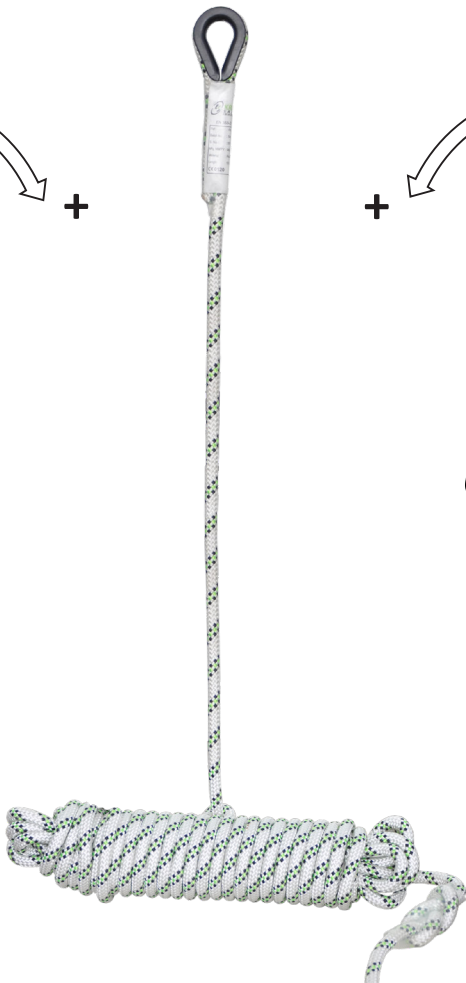

LOREL

FA 20 103 00B




REF.	FA 20 103 00A	FA 20 103 XX	FA 20 103 00B
LG.	---	10m 20m 30m 40m 50m	---
 KG	140 KG	---	100 KG
 UK CA	EN 353-2	EN 353-2, EN 358	EN 353-2, EN 358
MAT.	 ALU	 PA 11 mm	 ALU
	YES	---	NO
		---	
R (kN)	15 kN	15 kN	15 kN
+	EN 353-2: 200 KG in rescue only EN 12841 Type A	---	---
 Kg	0.35 KG	10m : 1.50 KG 20m : 2.55 KG 30m : 3.60 KG 40m : 4.65 KG 50m : 5.70 KG	0.34 KG

illy

FA 20 104 00



FA 20 104 10
FA 20 104 20
FA 20 104 30
FA 20 104 40
FA 20 104 50

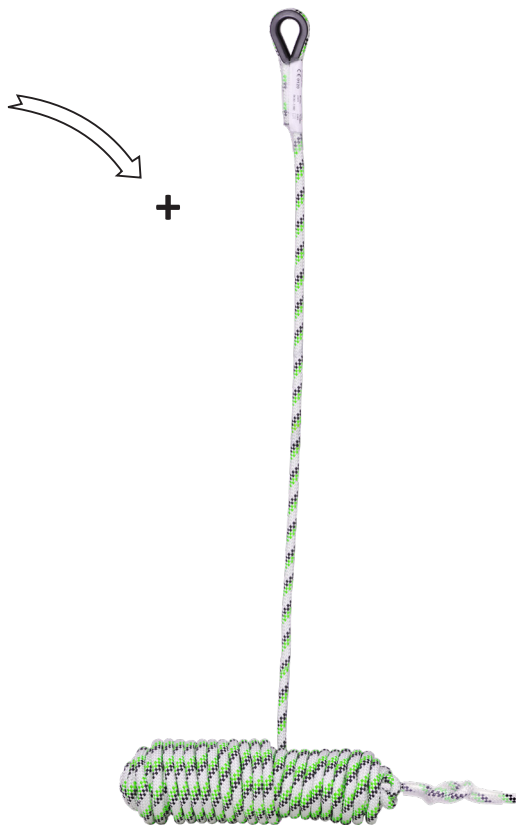

NiRO

FA 20 102 10
FA 20 102 15
FA 20 102 20



REF.	FA 20 104 00	FA 20 104 XX	FA 20 102 XX
LG.	---	10 m 20 m 30 m 40 m 50 m	10 m 15 m 20 m
KG	140 KG	---	140 KG
CE UK CA	EN 353-2	EN 353-2	EN 353-2
MAT.	INOX	PES 12 mm	STEEL / PES 12 mm
	YES	---	NO
	STEEL SCREW	---	STEEL SCREW
R (kN)	15 kN	15 kN	15 kN
kg	0.66 KG	10 m : 1.71 KG 20 m : 2.76 KG 30 m : 3.81 KG 40 m : 4.86 KG 50 m : 5.91 KG	10 m : 1.65 KG 15 m : 2.45 KG 20 m : 2.80 KG

Lofty-A

FA 20 100 00B



FA 20 100 10
FA 20 100 20
FA 20 100 30
FA 20 100 40
FA 20 100 50




REF.	FA 20 100 00B	FA 20 100 XX
LG.	---	10m 20m 30m 40m 50m
 KG	100 KG	---
 	EN 353-2	EN 353-2
MAT.		 PA 14-16 mm
	YES	---
		---
R (kN)	15 kN	15 kN
	1.20 KG	10 m : 1.25 KG 20 m : 2.50 KG 30 m : 3.90 KG 40 m : 5.15 KG 50 m : 6.05 KG

FA 20 901 00



FA 90 004 00

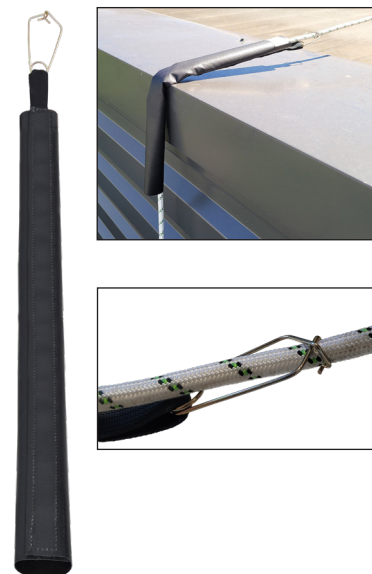

FA 90 005 00



FA 90 006 00



REF.	FA 20 901 00	FA 90 004 00	FA 90 005 00	FA 90 006 00
LG.	---	55 cm	---	44 cm x 12.5 cm
MAT.	P & 	PVC		
	0.59 KG	0.05 KG	0.57 KG	1.59 KG





KS 2001

REF.	KS 2001
KG	100 KG
CE UK CA	EN 353-2
MAT.	INOX
R (kN)	15 kN



REF. FA 20 200 00

R> 15 kN

MAT. INOX

KG 0.90 KG



KS 6000

REF.	KS 6000
KG	100 KG
CE UK CA	EN 353-1
MAT.	SNOX
R (kN)	15 kN



REF. FA 20 200 02
R> 15 kN
MAT. SNOX
Kg 0.82 KG



KS 7000

REF.	KS 7000
KG	140 KG
CE UK CA	EN 353-1
MAT.	SNOX
R (kN)	15 kN
+	II2 G Exh IIC T6 Gb



REF. FA 20 200 01
R> 15 kN
MAT. SNOX
Kg 0.60 KG

NEW

REF.	KS 7000	
	140 KG	
 	EN 353-1, PPE-R/11.119 (2 users)	
MAT.		
R (kN)	15 kN	



REF. FA 20 200 02
R> 15 kN
MAT. SNOX
Kg 0.82 KG



1

ANCAGES / ANCHORAGES / ANCLAJES / ANCORAGGI / ANSCHLAGPUNKTE



REF. FA 20 210 19
CE EN795 Type A
Q x1
MAT.
Q 5 x $\square$ $\varnothing$ M12
R (kN) 12 kN
kg 7.67 KG
Sys. KS 2001 / KS 6000 / KS 7000


UNIVERSAL FA 20 201 00
REF. FA 20 201 00 | FA 20 201 01
CE EN 795 Type A
Q x1
MAT.
Q 2x M16 x 220 mm | 2x M12 x 220 mm
R (kN) 15 kN
kg 3.26 KG | 1.25 KG
Sys. KS 2001 / KS 6000 / KS 7000

REF. FA 20 209 00
CE EN 795 Type A
Q x1
MAT.
Q 2 x $\square$ $\varnothing$ M12
R (kN) 15 kN
kg 1.30 KG
Sys. KS 2001 / KS 6000 / KS 7000

2

FIXATIONS BASSES / END ATTACHMENT POINTS / FIJACIONES BAJAS / FISSAGI INFERIORE / BEFESTIGUNG UNTEN

FA 20 201 01

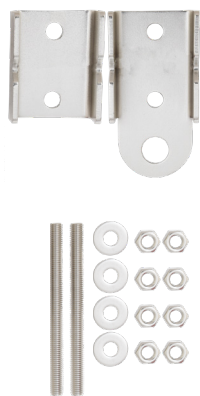

REF. FA 20 201 01
CE EN 795 Type A
Q x1
MAT.
Q 2x M12x220 mm
R (kN) 15 kN
kg 1.25 KG
Sys. KS 6000 / KS 7000

FA 20 205 00




REF. FA 20 205 00 - FA 20 205 01
MAT.
kg 1.05 KG | 0.80 KG
Sys. KS 6000 / KS 7000

FA 20 205 01



for installations
 <16 m

FA 20 203 00



REF. FA 20 203 00
CE ---
Q x1
MAT.
Q 2 x $\square$ $\varnothing$ 8mm
R (kN) ---
kg 1.05 KG
Sys. KS 2001

REF. FA 20 204 00

MAT.
kg 6.0 KG
Sys. KS 2001



3

SUPPORT D'ASSURAGE / LIFELINE / LÍNEA DE ANCLAJE / SUPPORTO DI SICUREZZA / SEILSICHERUNG



REF.	FA 20 207 00
CE	---
	x1
MAT.	INOX 316

R (kN)	34 kN
	0.39 KG
Sys.	KS 2001 / KS 4000 / KS 6000 / KS 7000




REF.	FA 20 200 99
CE	---
	x1
MAT.	INOX
	7x19 Ø 8 mm
R (kN)	R> 36 kN
	0.28 KG/m
Sys.	KS 2001 / KS 4000 / KS 6000 / KS 7000



REF.	FA 20 200 98
LG.	1 m
R>	36 kN
MAT.	INOX
Ø	8 mm
Sys.	KS 20001 / KS 6000 / KS 7000



REF. FA 20 200 97



REF.	FA 20 206 00
R>	15 kN
MAT.	INOX
	1.23 KG
Sys.	KS 7000

4

FIXATION INTERMÉDIAIRE / INTERMEDIATE ATTACHMENT / FIJACIÓN INTERMEDIARIA / FISSAGGIO INTERMEDIO / ZWISCHENBEFESTIGUNG



REF.	FA 20 202 00
CE	---
	x1
MAT.	INOX 316
	4xM12
	0.49 KG
Sys.	KS 2001 / KS 6000 / KS 7000

MARQUAGE / MARKING / MARCADO / MARCATURA / MARKIERUNG

		689 CHEMIN DU BULCAY LIEU-DIT LA MURIÈRE 38540 HEYRIEUX - FRANCE TEL : +33 (0)4 72 48 78 27		CE UK CA
INSTALLED BY				
PRODUCT / SYSTEM				
STANDARD / NORM				
BATCH AND YEAR OF MANUFACTURE				
LENGTH (in M)		CLEARANCE:		MAXIMUM NUMBER OF USERS:
INSTALLATION DATE / REFERENCE				
ACCEPTANCE DATE				
INSPECTION DATE				

REF. FA 20 902 00



KS 8000

REF.	KS 8000
LG.	---
KG	100 KG
CE	EN 353-1
MAT.	ALU & STEEL & INOX
R (kN)	15 kN
+	Ex Zone 1

REF. FA 20 700 00
R> 15 kN
MAT. INOX
Kg 0.60 KG
FALL INDICATOR



1
PAGE 82

2
PAGE 82

4
PAGE 83


3
PAGE 82

KS 9000

REF.	KS 9000
LG.	---
KG	100 KG
CE	EN 353-1
MAT.	ALU & STEEL & INOX
R (kN)	15 kN
+	Ex Zone 1



REF. FA 20 700 00
R> 15 kN
MAT. INOX
Kg 0.60 KG
FALL INDICATOR

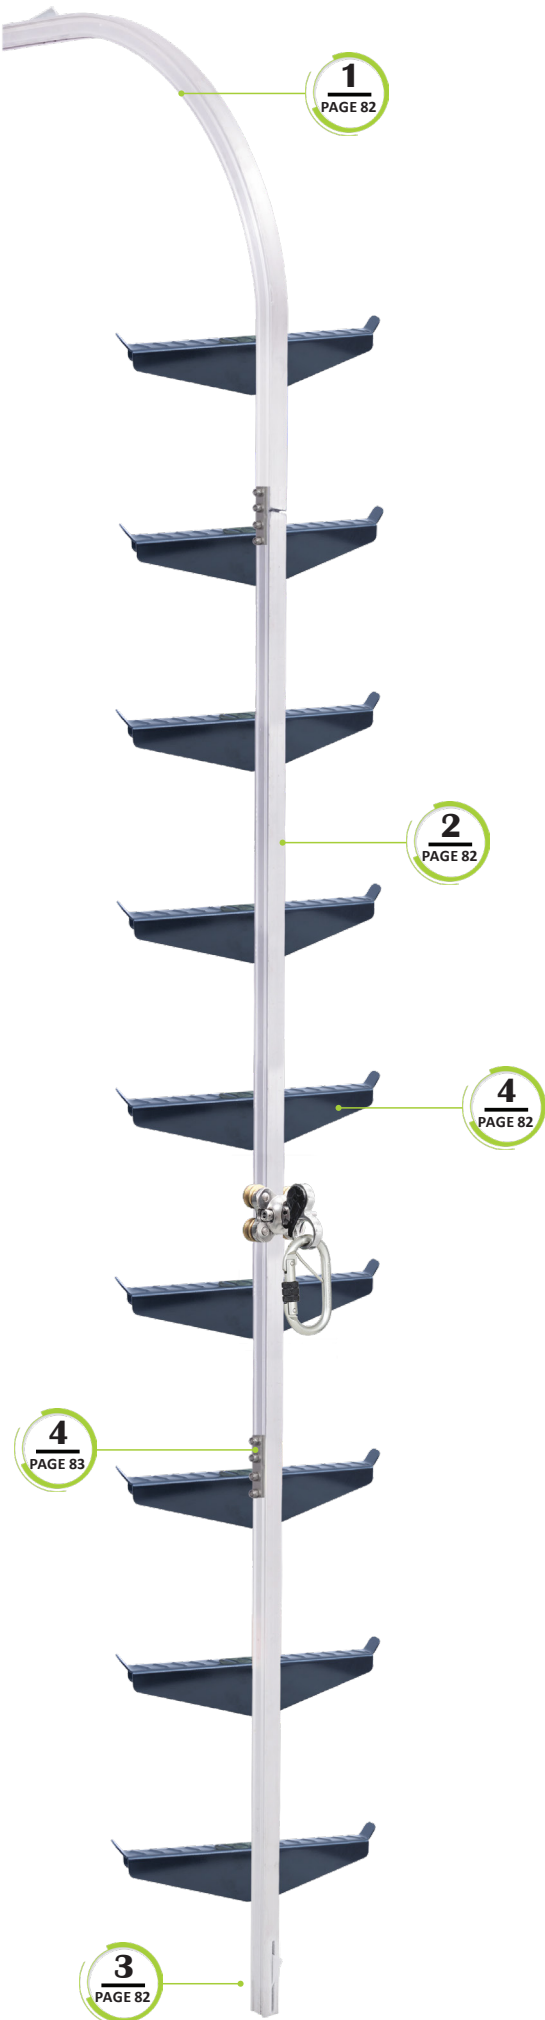


1

EXTENSION HAUTE / TOP EXTENSION / EXTENSIÓN SUPERIOR
ESTENSIONE SUPERIORE / ERWEITERUNG OBEN




REF. FA 20 701 00
LG. 1.5 m
MAT. 
 2.90 KG
Sys. KS 8000 / KS 9000

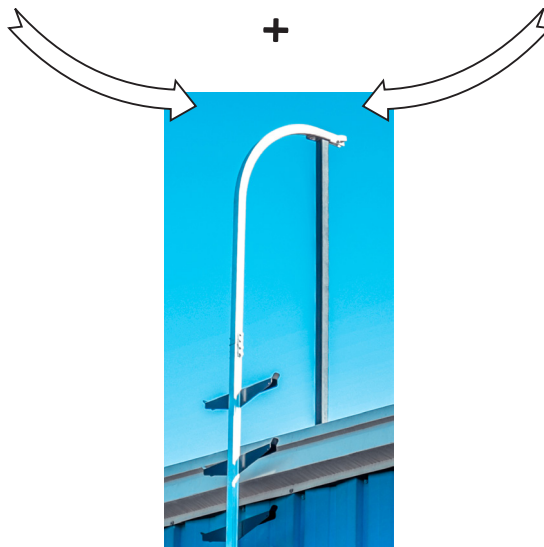


REF. FA 20 701 01
LG. 1.5 m
MAT. 
 10.45 KG
Sys. KS 8000 / KS 9000

2

RAIL / RAIL / RAÍL / ROTAIA / ZWISCHENSCHIENE

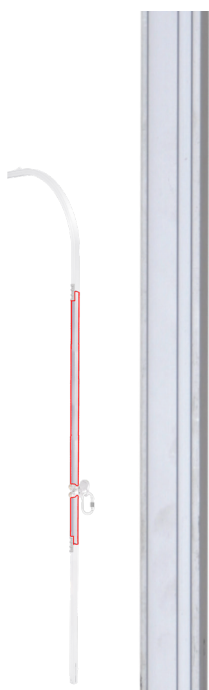

REF. FA 20 702 01
LG. 3.0 m
MAT. 
 4.0 KG
Sys. KS 5000 / KS 8000

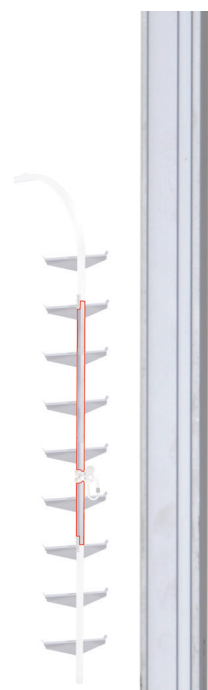

REF. FA 20 702 00
LG. 3.0 m
MAT. 
 4.0 KG
Sys. KS 9000

3

EXTRÉMITÉ BASSE / BOTTOM PART /
EXTREMO INFERIOR / ESTREMITÀ INFERIORE / UNTERES ENDE



REF. FA 20 703 01
LG. 3.0 m
MAT. 
 4.10 KG
Sys. KS 5000 / KS 8000



REF. FA 20 703 00
LG. 3.0 m
MAT. 
 4.10 KG
Sys. KS 9000

4

ACCESSOIRES / ACCESSORIES / ACCESORIOS / ACCESSORI / ZUBEHÖR



REF. FA 20 704 00

MAT.

0.18 KG

Sys. KS 5000 / KS 8000 / KS 9000



REF.	FA 20 705 00
CE	---
	x1
MAT.	

R (kN) / MBS (kN)	---
	0.20 KG
Sys.	KS 8000



REF. FA 20 707 00

MAT.

0.86 KG

Sys. KS 9000



REF. FA 20 708 00

MAT.

0.08 KG

Sys. KS 5000 / KS 9000

5

FIXATIONS / CLAMPS / FIJACIONES / FISSAGGI / BEFESTIGUNGEN



MARQUAGE / MARKING / MARCADO / MARCATURA / MARKIERUNG

		689 CHEMIN DU BULCLAY LIEU-DIT LA MURIERE 38540 HEYRIEUX - FRANCE TEL : +33 (0)4 72 48 78 27		CE UK CA
INSTALLED BY				
PRODUCT / SYSTEM				
STANDARD / NORM				
BATCH AND YEAR OF MANUFACTURE				
LENGTH (in M)		CLEARANCE:		
INSTALLATION DATE / REFERENCE				
ACCEPTANCE DATE				
INSPECTION DATE				MAXIMUM NUMBER OF USERS:

REF. FA 20 902 00

REF.	FA 20 706 01
CE	---
	x1
MAT.	
	M16
R (kN) / MBS (kN)	---
	5.48 KG
Sys.	KS 9000

REF.	FA 20 706 00
CE	---
	x1
MAT.	
	M16
R (kN) / MBS (kN)	---
	1.16 KG
Sys.	KS 5000 / KS 9000