



EASYSAFEWAY 1

FA 60 105 00
FA 60 105 07




4 WHEELS INCLUDED

EASYSAFEWAY 1

=
(A) + (B) + (C)

Potence mobile à base en H
Mobile H-shaped base davit system
Grúa móvil con base en H
Gruetta base a H
Mobiles H-förmiges Basis Davit System



FA 60 105 00 / FA 60 105 07

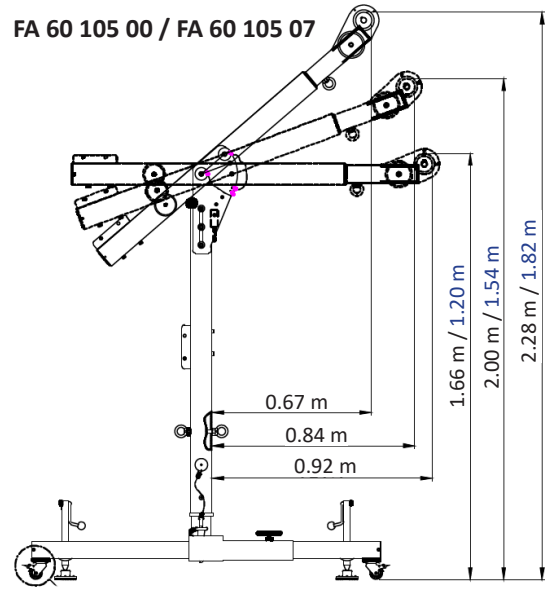



REF.	FA 60 105 00	FA 60 105 07
 	EN 795 Type B	EN 795 Type B
	x1	x1
	500 KG	500 KG
MAT.		
DIM. $\updownarrow$ H	(B) $\updownarrow$ H = 1.37 m -> 1.66 m / 2.00 m / 2.28 m	(B) $\updownarrow$ H = 0.91 m -> 1.20 m / 1.54 m / 1.82 m
R (kN) / MBS (kN)	12 kN / 21 kN	12 kN / 21 kN
	Min. 1.10 m / Max. 1.50 m	Min. 1.10 m / Max. 1.50 m
+	Machinery Directive + EN 1808 FA 60 022 01-02-11-12-13 FA 60 105 01, FA 60 105 02 FA 60 107 00, FA 60 108 00	Machinery Directive + EN 1808 FA 60 022 01-02-11-12-13 FA 60 105 01, FA 60 105 02 FA 60 107 00, FA 60 108 00
	62 KG (A) 11 KG + (B) 16 KG + (C) 35 KG	58.35 KG (A) 11 KG + (B) 12.35 KG + (C) 35 KG

EASY SAFEWAY 1

FA 60 105 01*

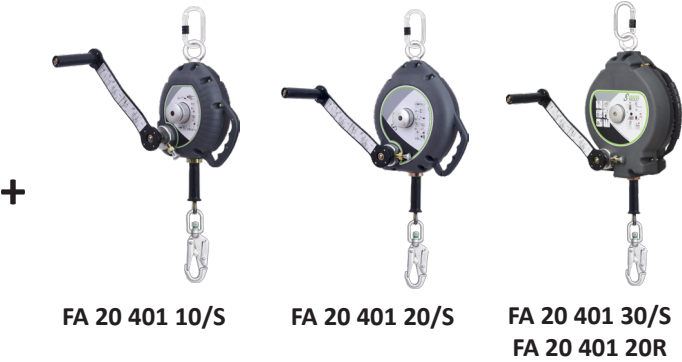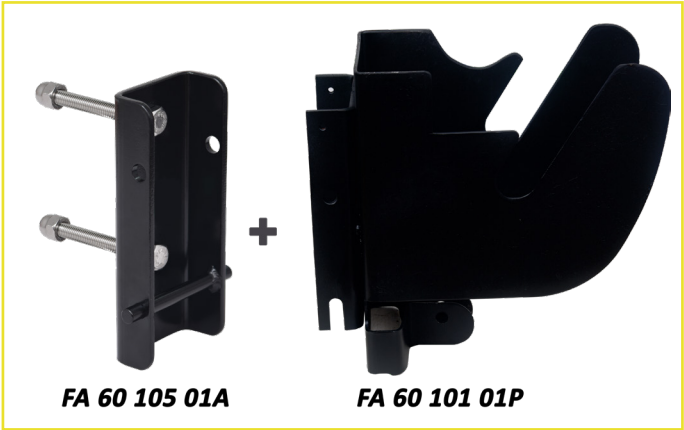

FA 60 105 02**

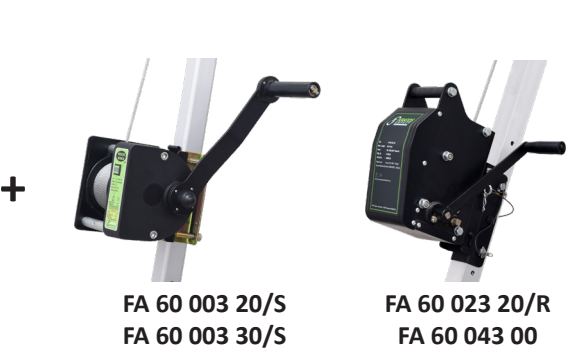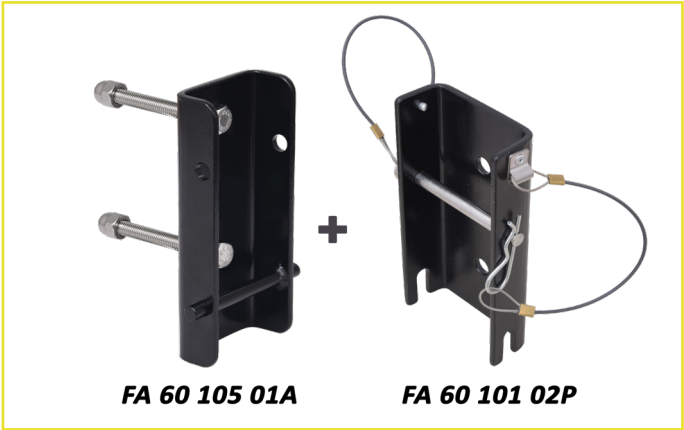


REF.	FA 60 105 01	FA 60 105 02
 	---	---
	---	---
 	---	---
MAT.		
DIM. 	---	---
R (kN) / MBS (kN)	---	---
	---	---
+	FA 20 401 10/S FA 20 401 20/S/R FA 20 401 30/S	FA 60 003 20/S FA 60 003 30/S FA 60 023 20/R FA 60 043 00
	6.55 KG	2.90 KG

*FA 60 105 01 = FA 60 101 01P + FA 60 105 01A / **FA 60 105 02 = FA 60 101 02P + FA 60 105 01A

EASYSAFEWAY 3


FA 60 107 00

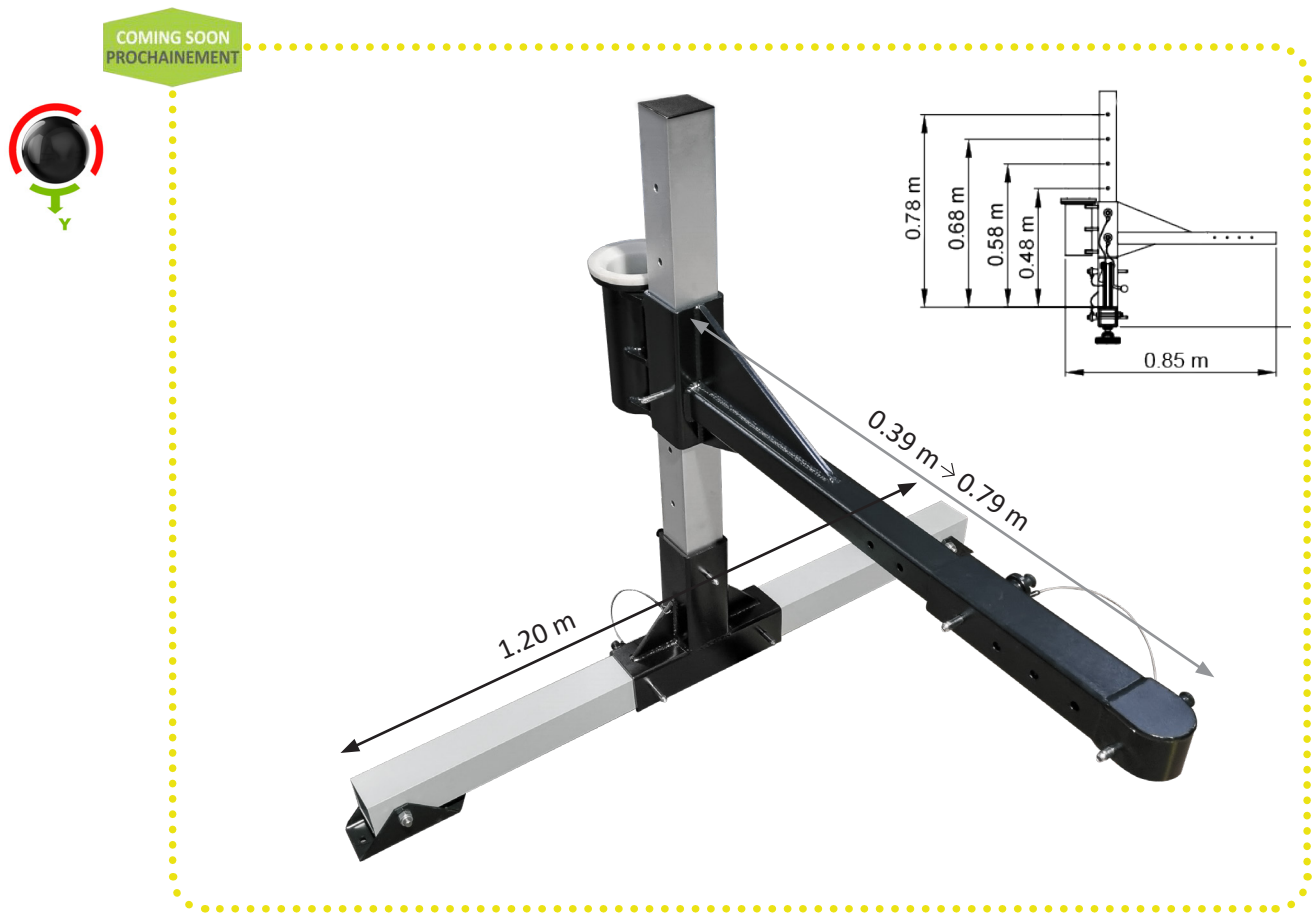


EASYSAFEWAY 3

Ancrage de boule d'attelage pour potence EASYSAFEWAY 1 / MULTISAFEWAY
Vehicle hitch mounting system for EASYSAFEWAY 1 / MULTISAFEWAY davit arm
Sistema de anclaje de enganche de vehículo para grúa móvil EASYSAFEWAY 1 / MULTISAFEWAY
Sistema di ancoraggio al gancio di traino del veicolo per gruetta EASYSAFEWAY 1 / MULTISAFEWAY
Verankerungssystem für Fahrzeugkupplung für EASYSAFEWAY 1 / MULTISAFEWAY Davit System

REF.	FA 60 107 00
	EN 795 Type B
	x1
	500 KG
MAT.	
R (kN) / MBS (kN)	12 kN / 15 kN
	tow hitch Ø 51 mm / 2"
+	FA 60 022 00, FA 60 105 03, FA 60 105 04, FA 60 105 05
	31.72 KG

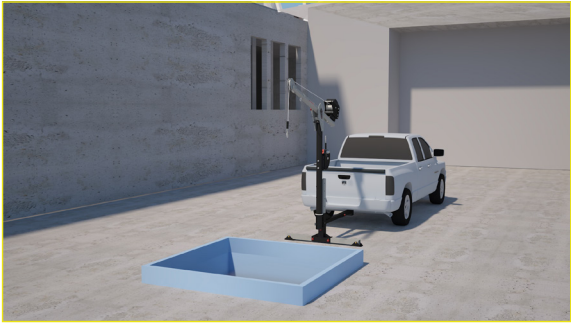


COMING SOON
PROCHAINEMENT

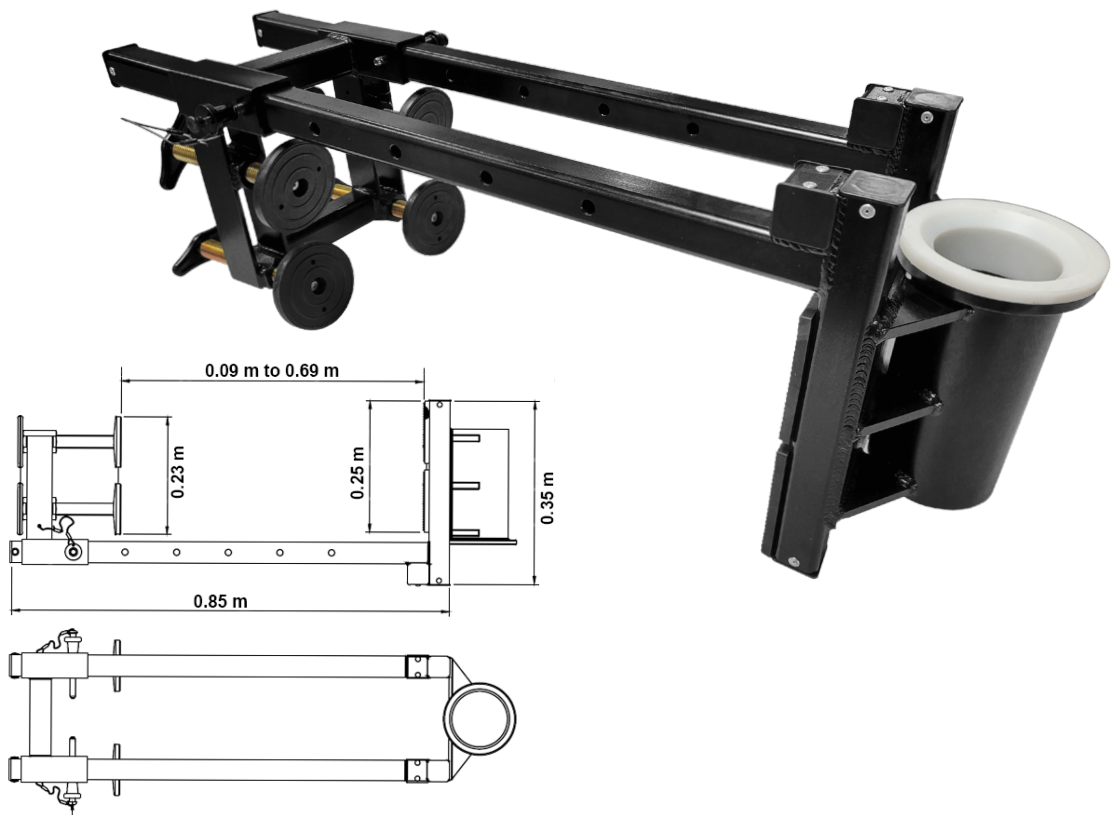

EASYSAFEWAY 4

Ancrage acrotère pour potence EASYSAFEWAY 1 / MULTISAFEWAY
Acroterion anchorage for EASYSAFEWAY 1 / MULTISAFEWAY davit arm
Anclaje de acroterio para grúa móvil EASYSAFEWAY 1 / MULTISAFEWAY
Ancoraggio di acroterio per gruetta EASYSAFEWAY 1 / MULTISAFEWAY
Akroterienanker für EASYSAFEWAY 1 / MULTISAFEWAY Davit System

REF.	FA 60 108 00
 	EN 795 Type B
	x1
	250 KG
MAT.	
R (kN) / MBS (kN)	12 kN / 15 kN
	0.09 m → 0.69 m
+	FA 60 022 00, FA 60 105 03, FA 60 105 04, FA 60 105 05
	27.10 KG




EASYSAFEWAY 2

FA 60 106 00



EXTENDABLE ARM

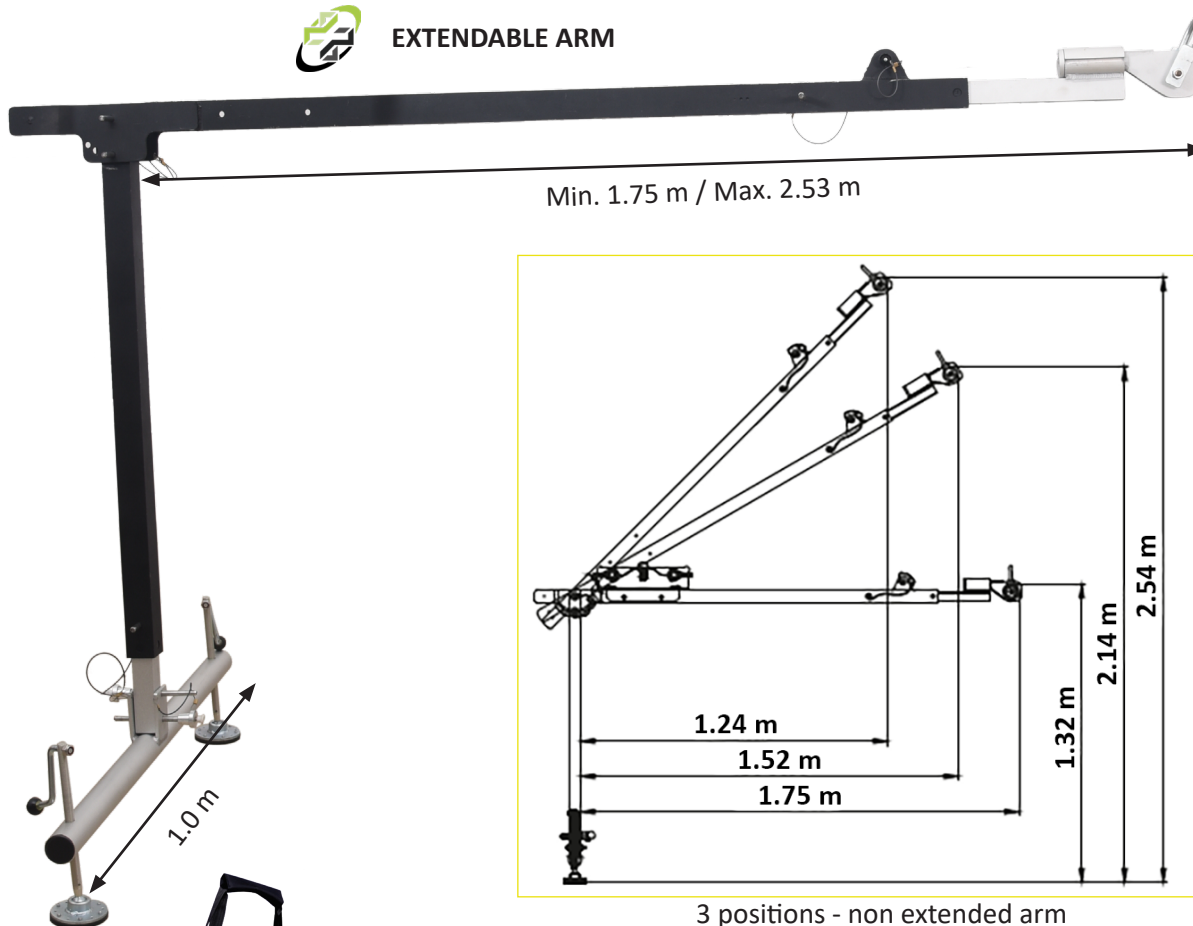

3 positions - non extended arm



Transport bag included

EASYSAFEWAY 2

Potence d'ancrage suspendue
Extendable pole hoist davit
Estructura de anclaje suspendida
Braccio di ancoraggio sospeso
Aufgehänger Verankerungsausleger


REF.	FA 60 106 00	FA 60 106 01	FA 60 106 02
	EN 795 Type A (not PPE)	---	---
	x1	---	---
MAX kg	500 KG	---	---
MAT.			
DIM.	3 positions: Non-extended arm: 1.32 m / 2.14 m / 2.54 m Extended arm: 1.32 m / 2.54 m / 3.14 m	---	---
R (kN) / MBS (kN)	12 kN / 15 kN	---	---
	1 m	---	---
+	Machinery Directive + EN 1808 FA 60 106 01, FA 60 106 02, FA 60 106 03	FA 20 401 10/S FA 20 401 20/S/R FA 20 401 30/S	FA 60 003 20/S, FA 60 003 30/S FA 60 023 20/R, FA 60 043 00
Kg	13.19 KG	6.92 KG	3.21 KG

EASY SAFEWAY 2

1



FA 60 106 01*

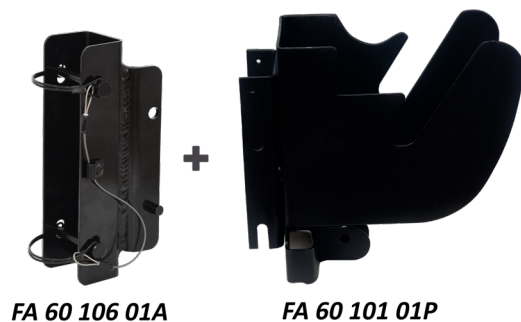

FA 60 106 01A

FA 60 101 01P

FA 20 401 10/S

FA 20 401 20/S/R



+


FA 20 401 30/S



2



FA 60 106 02**

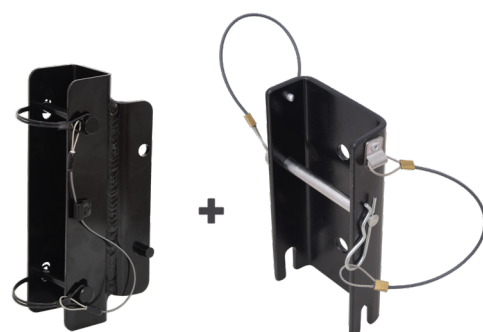

FA 60 106 01A


FA 60 101 02P

+



FA 60 003 20/S
FA 60 003 30/S

FA 60 023 20/R
FA 60 043 00

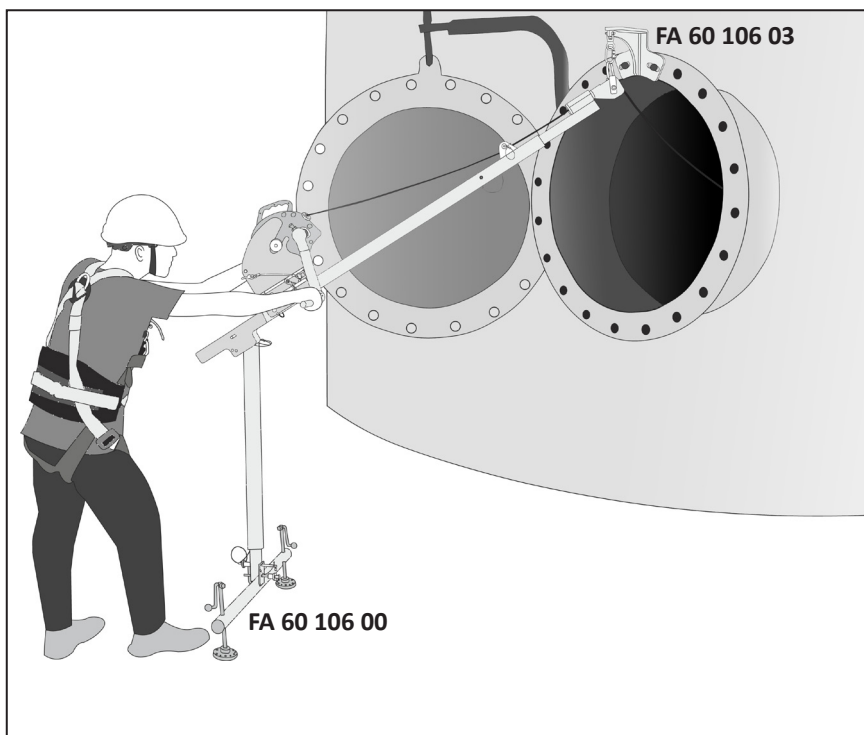

COMING SOON
PROCHAINEMENT

FA 60 106 03



Anchorage for extendable pole hoist
davit for side entry

REF.	FA 60 106 03
CE UK CA	EN 795 Type A (not PPE)
Person icon	x1
MAT.	ALU
R (kN) / MBS (kN)	12 kN / 23 kN
+	FA 60 106 00
Kg icon	6.25 KG

*FA 60 106 01 = FA 60 101 01A + FA 60 106 01P / **FA 60 106 02 = FA 60 106 01A + FA 60 101 02P

CONFINED SPACE



FA 60 001 00
FA 60 002 00



FA 60 001 02

FA 20 401 30/S
FA 20 401 20R




FA 60 001 03

FA 20 401 20/S



FA 60 001 04

FA 20 401 10/S




REF.	FA 60 001 00 FA 60 002 00	FA 60 001 02	FA 60 001 03	FA 60 001 04	FA 60 002 03
	EN 795 Type B	---	---	---	---
	x1 x1	---	---	---	---
	500 KG / 250 KG 500 KG / 250 KG	---	---	---	---
MAT.					
DIM.	1.15m → 2.15m 1.9m → 2.9m	---	---	---	---
R (kN) / MBS (kN)	12 kN / 20 kN 12 kN / 20 kN	---	---	---	---
	1.08m → 1.62m 1.52m → 2.05m	---	---	---	---
+	Machinery Directive + EN 1808 FA 60 002 01, FA 60 002 02, FA 60 002 03	FA 20 401 30/S FA 20 401 20R	FA 20 401 20/S	FA 20 401 10/S	FA 60 001 00 FA 60 002 00 FA 60 101 00 FA 60 102 00
	13.0 KG 15.0 KG	3.25 KG	3.24 KG	3.20 KG	1.80 KG






REF.	FA 60 101 00	FA 60 102 00	FA 60 101 01	FA 60 101 02	FA 60 002 01	FA 60 002 02
	EN 795 Type B		---	---	---	---
	x1	x1	---	---	---	---
	500 KG / 250 KG		---	---	---	---
MAT.						
DIM.	1.15m → 2.15m	1.9m → 2.9m	---	---	---	---
R (kN) / MBS (kN)	12 kN / 20 kN	12 kN / 20 kN	---	---	---	---
	1.08m → 1.62m	1.52m → 2.05m	---	---	---	---
+	Machinery Directive + EN 1808 FA 60 002 01, FA 60 002 02, FA 60 002 03		FA 20 401 10/S FA 20 401 20/S/R FA 20 401 30/S	FA 60 003 20/S FA 60 003 30/S FA 60 023 20/R FA 60 043 00	FA 60 001 00 FA 60 002 00 FA 60 101 00 FA 60 102 00	FA 60 001 00 FA 60 002 00 FA 60 101 00 FA 60 102 00
	13.0 KG	15.0 KG	6.55 KG	2.90 KG	0.7 KG	4.5 KG

*FA 60 101 01 = FA 60 101 01P + FA 60 101 01A / **FA 60 101 02 = FA 60 101 02P + FA 60 101 01A

CONFINED SPACE

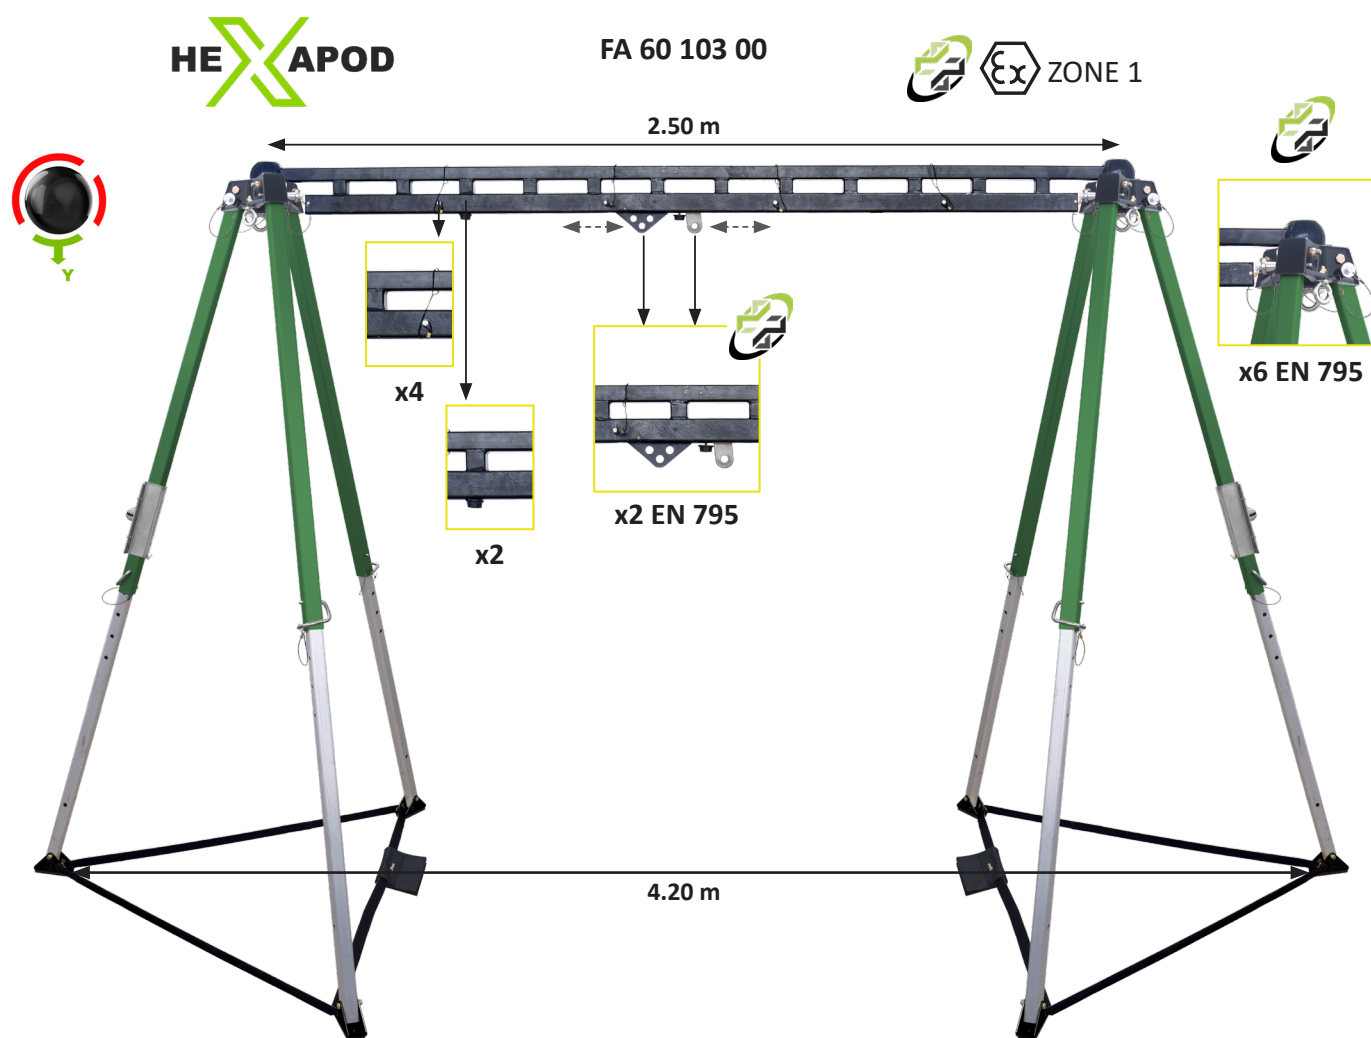

REF.	FA 60 103 00
 	EN 795 Type B TS 16415 Type B
	x2
	250 KG
MAT.	 & 
DIM. 	1.15m → 2.15m
R (kN) / MBS (kN)	13 kN / 23 kN
	1.08m → 1.62m / 1.8m → 4.2m
+	Machinery Directive + EN 1808 FA 60 101 01, FA 60 101 02 FA 60 002 01, FA 60 002 02, FA 60 002 03
	49.33 KG

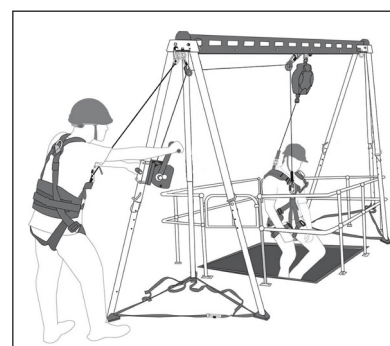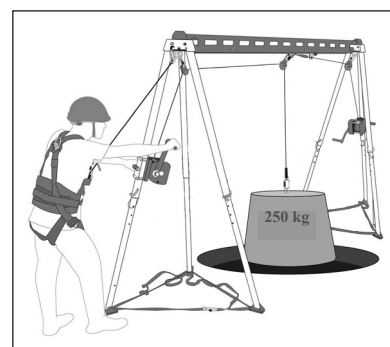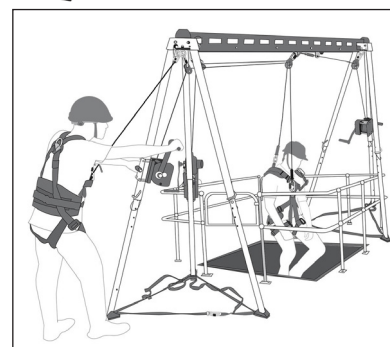

FA 60 104 00




x5 EN 795



Lashing webbings & karabiners included




Quadpod bag
(FA 90 108 00)
included



FA 60 036 03



FA 60 036 05



REF.	FA 60 104 00	FA 60 036 03 FA 60 036 05	
 	EN 795 Type B TS 16415 Type B	PPE Regulation (EU) 2016/425 Annex II using PPE-R 11.114	
	x2	x1	
 	500 KG	---	
MAT.			
DIM. 	1.21m → 1.75m	Ø25 mm Ø19 mm (x3)	Ø27 mm Ø19 mm (x5)
R (kN) / MBS (kN)	13 kN / 25 kN	20 kN / 45 kN	
 / 	1.65m → 2.3m / 2.3m → 3.2m	---	
+	Machinery Directive	---	
	15.56 KG	0.053 KG	0.21 KG




MultisafeWay

FA 60 022 00

ZONE 1



x2 EN 795

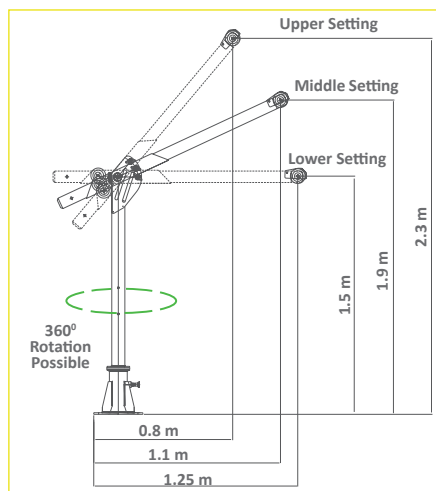

FA 60 022 01



FA 60 022 02



FA 60 022 11



FA 60 022 12



FA 60 022 13



REF.	FA 60 022 00	FA 60 022 01	FA 60 022 02	FA 60 022 11	FA 60 022 12	FA 60 022 13
	EN 795 Type A TS 16415 Type A (not PPE)	EN 795 Type A (not PPE)	EN 795 Type A (not PPE)	EN 795 Type A (not PPE)	EN 795 Type A (not PPE)	EN 795 Type A (not PPE)
	x2	---	---	---	---	---
	300 KG	---	---	---	---	---
MAT.						
DIM.	1.50m/1.90m/2.30m	---	---	---	---	H: 273.2 mm Ø: 108.0 mm
R (kN) / MBS (kN)	15 kN / 16 kN	---	---	---	---	---
	---	M16 (x4)	M16 (x4)	M16 (x4)	M16 (x4)	CONCRETE
+	Machinery Directive, EN 1808, 360° rotation, FA 60 022 01-02-11-12-13 FA 60 022 03-04-05-06, FA 60 107 00, FA 60 108 00	FA 60 022 00 FA 60 105 00 FA 60 105 07	FA 60 022 00 FA 60 105 00 FA 60 105 07	FA 60 022 00 FA 60 105 00 FA 60 105 07	FA 60 022 00 FA 60 105 00 FA 60 105 07	FA 60 022 00 FA 60 105 00 FA 60 105 07
	34.87 KG	11.28 KG	12.43 KG	11.53 KG	12.48 KG	2.20 KG

MultisafeWay

FA 60 022 03



FA 60 022 04



FA 60 022 05




FA 60 022 06*



FA 60 101 02P + FA 60 022 06A



REF.	FA 60 022 03	FA 60 022 04	FA 60 022 05	FA 60 022 06
 	---	---	---	---
	---	---	---	---
 MAX kg	---	---	---	---
MAT.	 STEEL	 STEEL	 STEEL	 STEEL
DIM. 	---	---	---	---
	---	---	---	---
+	FA 20 401 30/S	FA 20 401 20/S/R	FA 20 401 10/S	FA 60 003 20/S FA 60 003 30/S FA 60 023 20/R FA 60 043 00
 Kg	2.90 KG	2.71 KG	2.52 KG	2.33 KG

*FA 60 022 06 = FA 60 101 02P + FA 60 022 06A

CONFINED SPACE




REF.	FA 60 003 20	FA 60 003 20S	FA 60 003 30	FA 60 003 30S
LG.	20 m	20 m	30 m	30 m
	EN 1496 Class A (not PPE)	EN 1496 Class A (not PPE)	EN 1496 Class A (not PPE)	EN 1496 Class A (not PPE)
	x1	x1	x1	x1
	135 KG	135 KG	135 KG	135 KG
MAT.	Ø 4.8 mm	Ø 4.8 mm	Ø 4.8 mm	Ø 4.8 mm
MAT.				
+	EN 13157 + A1 Machinery Directive : 250 KG FA 60 001 00 / FA 60 002 00 FA 60 101 00 / FA 60 102 00 FA 60 103 00 / FA 60 022 00 FA 60 105 00-07 / FA 60 106 00		EN 13157 + A1 Machinery Directive : 250 KG FA 60 001 00 / FA 60 002 00 FA 60 101 00 / FA 60 102 00 FA 60 103 00 / FA 60 022 00 FA 60 105 00-07 / FA 60 106 00	
	7.54 KG	7.73 KG	8.75 KG	8.97 KG



REF.	FA 60 023 20	FA 60 023 20R
LG.	20 m	20 m
	EN 1496 Class B (not PPE)	EN 1496 Class B (not PPE)
	x1	x1
	135 KG	135 KG
MAT.	Ø 6.0 mm	Synthetic Ø 6.5 mm
MAT.		
+	EN 13157 Machinery Directive : 250 KG / Secondary Brake Mechanism FA 60 001 00 / FA 60 002 00 FA 60 101 00 / FA 60 102 00 FA 60 103 00 / FA 60 022 00 FA 60 105 00-07 / FA 60 106 00	
	11.36 KG	10.39 KG

COMING SOON
PROCHAINEMENT


 NO LIMITED LENGTH




Corde FA 70 010 99 vendue séparément (p. 157)
Rope FA 70 010 99 sold separately (p. 157)
Cuerda FA 70 010 99 vendida aparte (p. 157)
Corda FA 70 010 99 venduta separatamente (p. 157)
Seil FA 70 010 99 ist separat erhältlich (p. 157)

REF.	FA 60 043 00
LG.	---
 	EN 1496 Class A (not PPE)
	x1
	135 KG
MAT. 	 PA 10.5 mm
+	EN 13157 + A1 Machinery Directive : 250 KG / Secondary Brake Mechanism FA 60 001 00 / FA 60 002 00 FA 60 101 00 / FA 60 102 00 FA 60 022 00 / FA 60 103 00 FA 60 105 00-07 / FA 60 106 00
	12.00 KG

SPECIFIC ANCHORAGES






FA 60 010 00

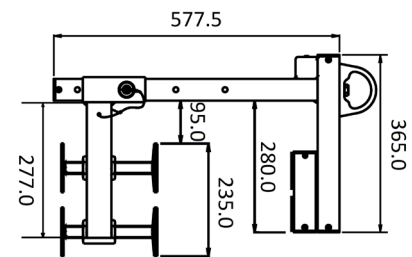


REF.	FA 60 010 00
CE UK CA	EN 795 Type B
	x1
MAT.	
R (kN) / MBS (kN)	12 kN / 23 kN
	--- 60 mm → 320 mm
	9.6 KG




FA 60 015 00

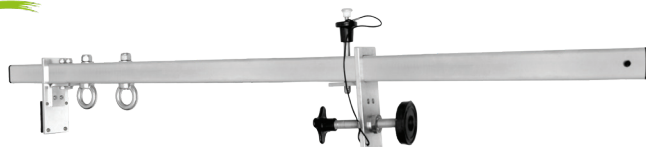

FA 60 015 01

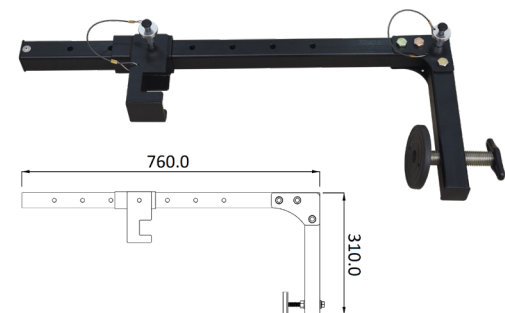

Door anchor bag included

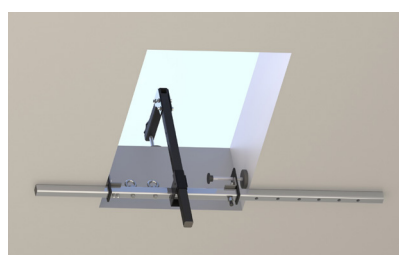

FA 60 015 00 + FA 60 015 01

REF.	FA 60 015 00	FA 60 015 01
CE UK CA	EN 795 Type B TS 16415 Type B	---
	x2	x2
MAT.		
R (kN) / MBS (kN)	13 kN / 20 kN	---
	--- 600 mm → 1250 mm	--- 85 mm → 550 mm
	4.75 KG	6.28 KG


KARIBA

NEW

FA 60 045 00



 2 USERS

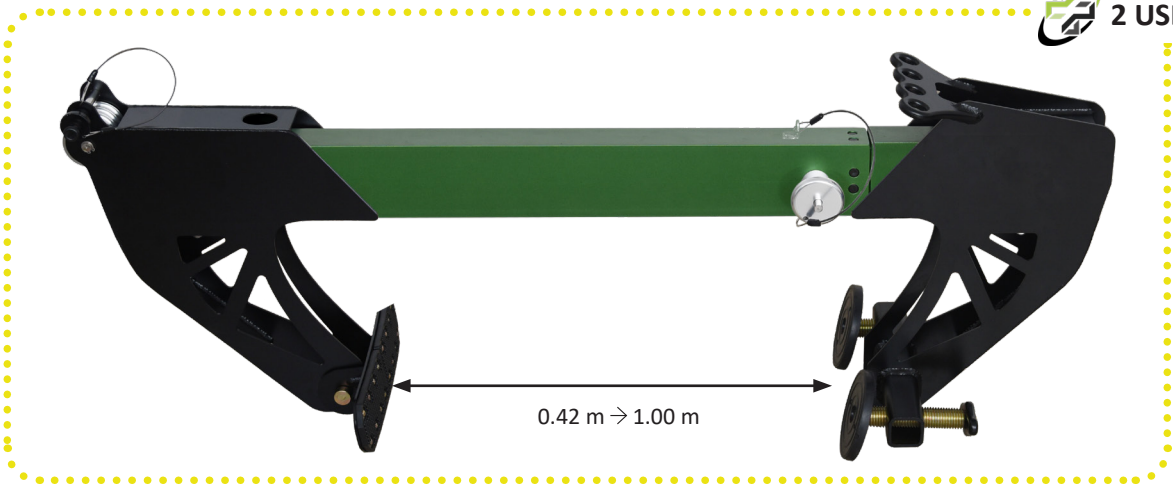

 EN 795:2012 TYPE B




transport lanyard included



4x EN 795



REF.	FA 60 045 00
 	EN 795 Type B TS 16415 Type B
	x2
MAT.	 / 
R (kN) / MBS (kN)	12 kN / ---
	--- 0.42 m → 1.00 m
	17.4 KG

CROSSLOOP

FA 60 040 00



250 mm

+

500 mm


+


750 mm

3 LOOPS LENGTHS INCLUDED



8.5 m cord included

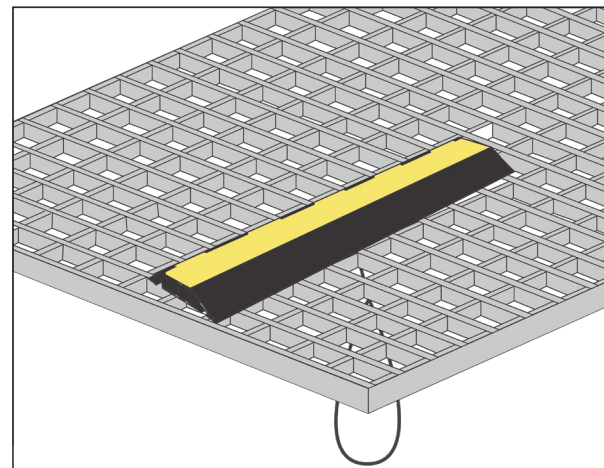

REF.	FA 60 040 00
CE UK CA	EN 795 Type B
	x1
MAT.	PA /  STEEL /  ALU
DIM.	500 x 220 mm
R (kN) / MBS (kN)	12 kN / 15 kN
	---
+	3 different sized anchorage loops included, 8.5 m cord included
	3.75 KG



SlabGrab

COMING SOON
PROCHAINEMENT

FA 60 044 00



3 USERS

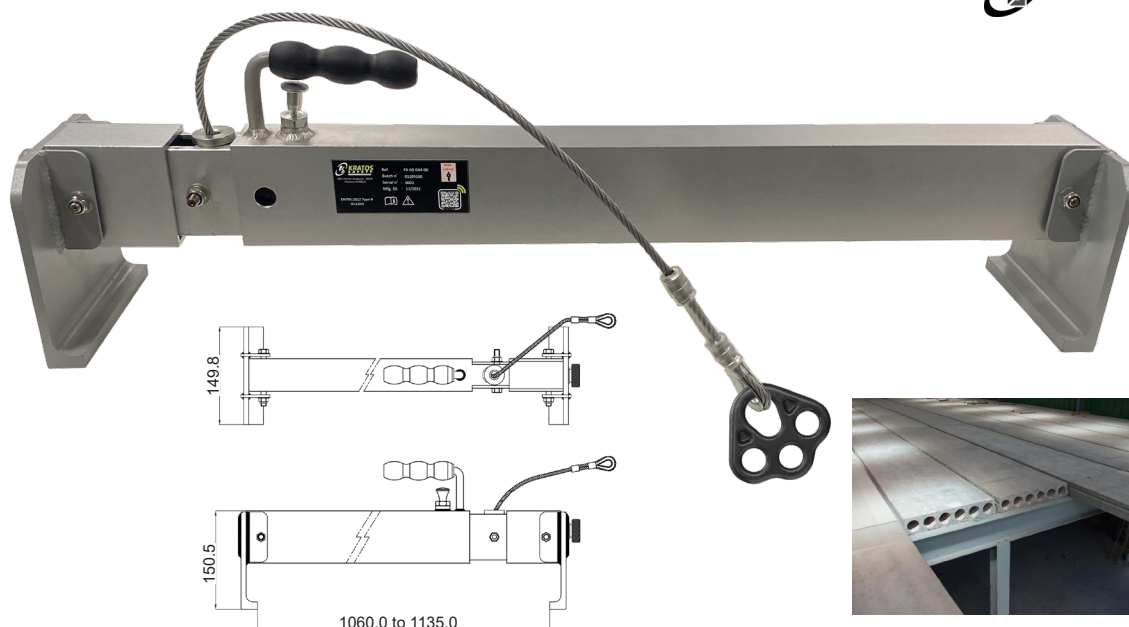


SKY GRAB

NEW

FA 60 046 00

SET OF 4 COMPONENTS




REF.	FA 60 044 00	FA 60 046 00
CE UK CA	EN 795 Type B TS 16415 Type B	EN 795 Type B
	x3	x1
MAT.	ALU / STEEL	INOX / PES 70 mm FA 60 006 105 FA 60 046 01
DIM.	820 x 155 x 150 mm	1.0 m
R (kN) / MBS (kN)	14 kN / ---	12 kN / 23 kN
	(1110 mm → 1200 mm)	---
+	---	---
	7.64 KG	1.40 KG

ROOF ANCHORAGES


WAVY 1

FA 60 026 00





WAVY 2

FA 60 034 00

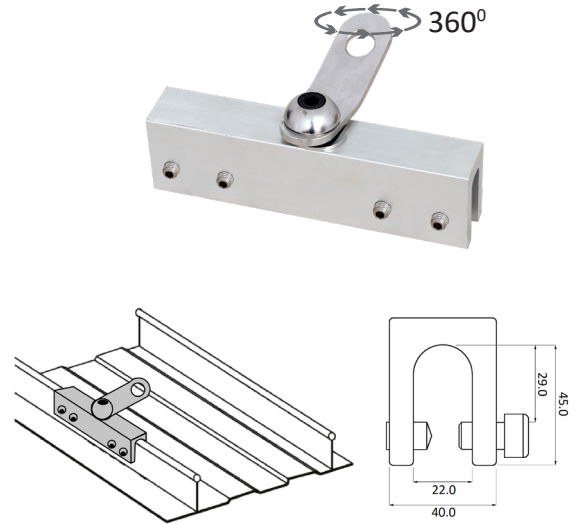



FA 60 012 00

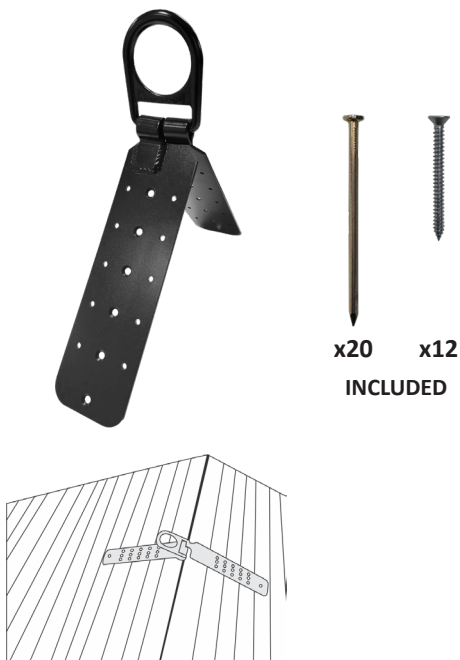


WOSLING

FA 60 030 04

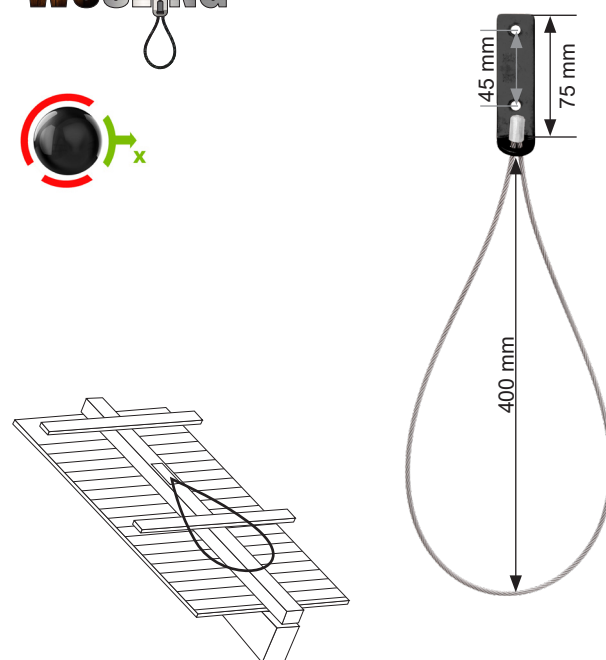


REF.	FA 60 026 00	FA 60 034 00	FA 60 012 00	FA 60 030 04
 	EN 795 Type B	EN 795 Type A (not PPE)	EN 795 Type A (not PPE)	EN 795 Type A (not PPE)
	x1	x1	x1	x1
R (kN) / MBS (kN)	12 kN / 15 kN	12 kN / 15 kN	12 kN / 23 kN	12 kN / 15 kN
MAT.				
	--- H = Max. 50 mm	---	--- Min. 80 x 80 mm	2x M8 Ø 9 mm x 75 mm
+	energy absorbing eye	360°	---	---
	3.00 KG	0.83 KG	1.05 KG	0.27 KG

FA 60 320 00

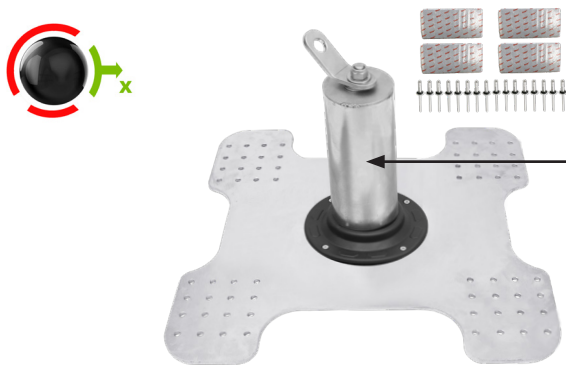


FA 60 330 00

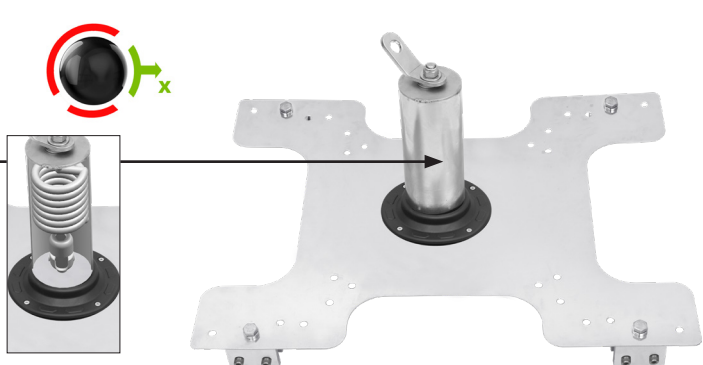

REF.	FA 60 320 00	FA 60 330 00
 	EN 795 Type A TS 16415 Type A (not PPE)	EN 795 Type A TS 16415 Type A (not PPE)
	x4	x4
MAT.		
DIM.	H: 240 mm 499 mm x 485 mm	H: 329 mm 650 mm x 485 mm
	16 rivets	4 x 4 screws
R (kN) / MBS (kN)	15 kN / 26 kN	15 kN / 26 kN
	12.5 KG	12.5 KG


KORI

FA 60 042 00

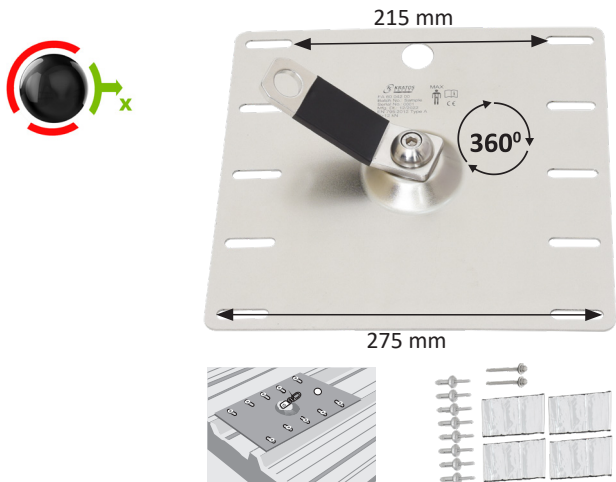

IBIS


FA 60 041 00

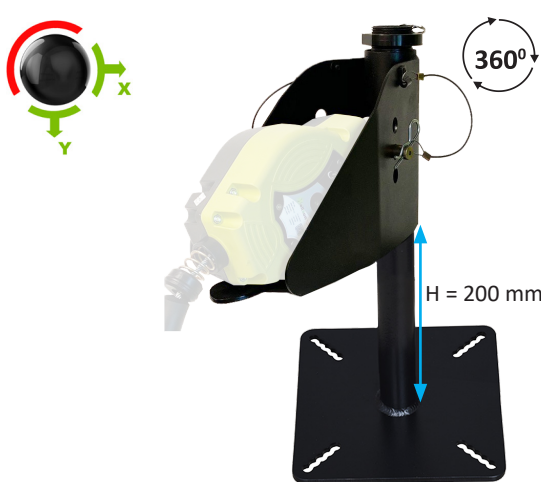


REF.	FA 60 042 00	FA 60 041 00
 	EN 795 Type A (not PPE)	EN 795 Type A (not PPE)
	x1	x1
MAT.		
DIM.	H: 80 mm - 290 mm x 305 mm	275 mm x 275 mm
R (kN) / MBS (kN)	12 kN / 15 kN	12 kN / 15 kN
	2x M7x75 mm steel timber tek screws + 8x8 mm pop rivets	4x M12
+	energy absorbing eye	compatible with all KRATOS SAFETY blocks from 6 m to 30 m, except KRONOS and TRITON blocks
	2.00 KG	12.00 KG

I-BEAM ANCHORS


GRABNSLIDE

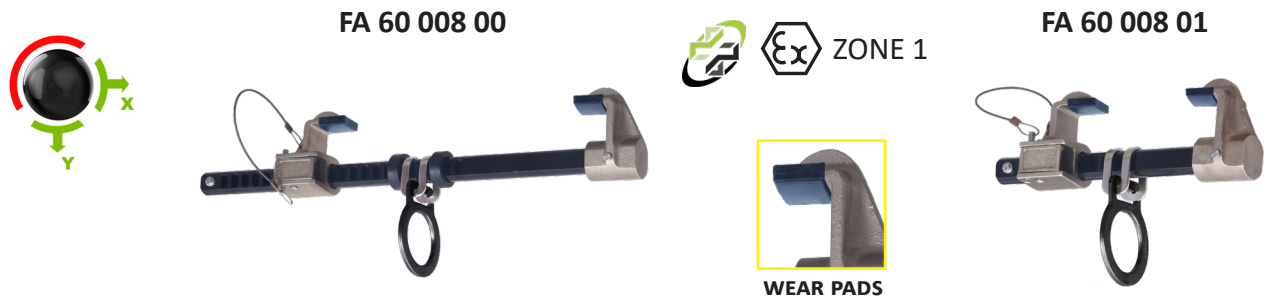

REF.	FA 60 008 00	FA 60 008 01
 	EN 795 Type B	EN 795 Type B
	x1	x1
MAT.		
DIM.	---	---
R (kN) / MBS (kN)	12 kN / 23 kN	12 kN / 23 kN
	100 mm → 350 mm	70 mm → 150 mm
	1.85 KG	1.60 KG

GRABNROLL



REF.	FA 60 008 03	FA 60 008 04
 	EN 795 Type B	EN 795 Type B
	x1	x1
MAT.		
DIM.	---	---
R (kN) / MBS (kN)	12 kN / 23 kN	12 kN / 23 kN
	80 mm → 250 mm	80 mm → 250 mm
	3.90 KG	3.70 KG
+	---	MAX. DIELECTRIC RESISTANCE = 30 kV

VERTI GRAB


COMING SOON
PROCHAINEMENT

FA 60 008 05




P/SE

FA 60 033 19

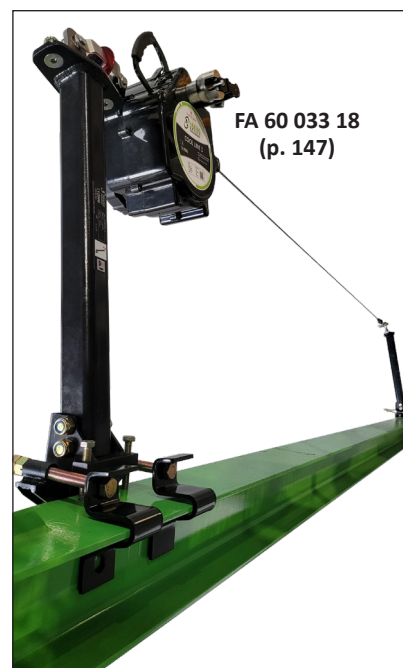


REF.	FA 60 008 05	FA 60 033 19
 	EN 795 Type B	EN 795 Type B TS 16415 Type B
	x1	x4
MAT.  / 	 ALU /  STEEL	 STEEL
R (kN) / MBS (kN)	12 kN / 23 kN	15 kN / ---
DIM.	---	↕ H 0.73m
	90mm → 340mm	150mm → 220mm
+	VERTICAL USE	---
	2.60 KG	12.80 KG

SINGLE ANCHOR POINTS

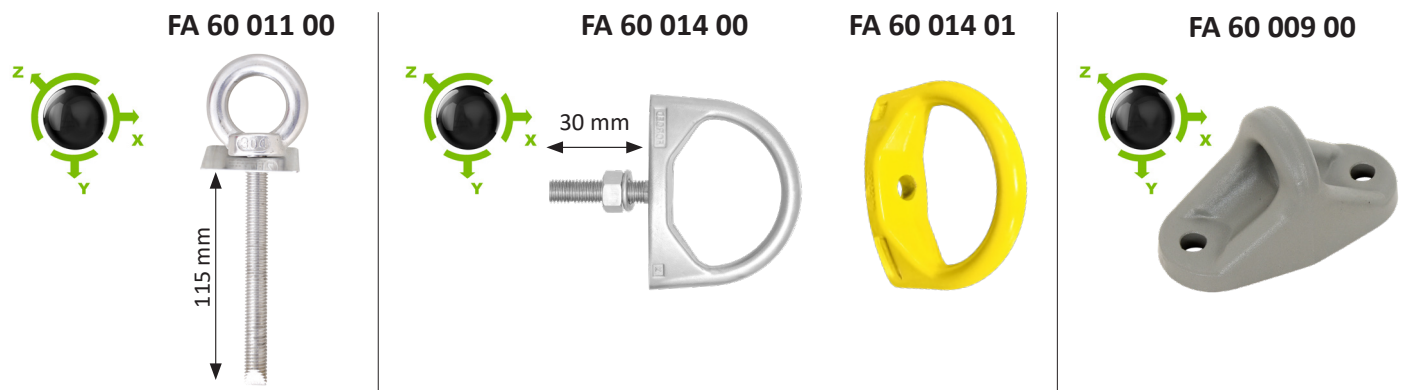

REF.	FA 60 011 00	FA 60 014 00	FA 60 014 01	FA 60 009 00
 	EN 795 Type A (not PPE)	EN 795 Type A TS 16415 Type A (not PPE)	EN 795 Type A TS 16415 Type A (not PPE)	EN 795 Type A TS 16415 Type A (not PPE)
	x1	x4	x4	x3
MAT.				
DIM.	53 mm / 115 mm	100 x 76 mm	100 x 76 mm	135 x 70 x 70 mm
R (kN) / MBS (kN)	12 kN / 23 kN	12 kN / 23 kN	12 kN / 23 kN	12 kN / 23 kN
	M12 Ø 13 mm x 115 mm	M12 Ø 13 mm x 10 mm	---	2x M12 ---
+	---	---	---	---
	0.26 KG	0.53 KG	0.37 KG	0.33 KG



REF.	FA 60 027 10 FA 60 027 12	FA 60 027 10A FA 60 027 12A	FA 60 028 14
 	EN 795 Type A (not PPE)	EN 795 Type A (not PPE)	EN 795 Type A (not PPE)
	x1	x1	x1
MAT.			
DIM.	57 x 45 x 32 mm	57 x 45 x 32 mm	---
R (kN) / MBS (kN)	12 kN / 23 kN	12 kN / 23 kN	12 kN / 23 kN
	M10 M12 ---	M10 M12 ---	2x M12 ---
+	---	---	---
	0.06 KG	0.06 KG	0.31 KG


IN LOCK-1


FA 60 018 00



IN LOCK-2

FA 60 019 00
FA 60 019 01

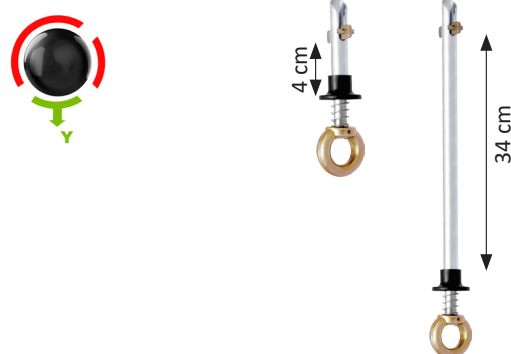



REF.	FA 60 018 00	FA 60 019 00 FA 60 019 01
 	EN 795 Type B	EN 795 Type B
	x1	x1
MAT.	 / 	 / 
DIM.	---	4.0 cm 34.0 cm
R (kN) / MBS (kN)	12 kN / 15 kN	12 kN / 23 kN
	CONCRETE Ø 18 mm - 19 mm x 110 mm	Ø 22 mm
+	---	---
	0.15 KG	0.55 KG 1.25 KG

FA 60 038 00

IN LOCK-3

FA 60 038 01

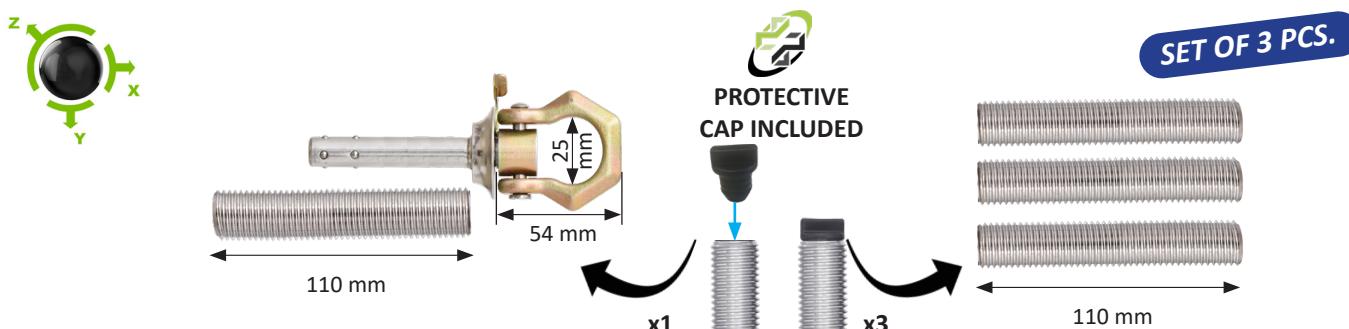


REF.	FA 60 038 00	FA 60 038 01
 	EN 795 Type A (not PPE)	---
	x1	x1
MAT.	 / 	
DIM.	54 mm / 110 mm	110 mm
R (kN) / MBS (kN)	12 kN / 23 kN	12 kN / 23 kN
	CONCRETE Ø 20 mm x 150 mm	CONCRETE Ø 20 mm x 150 mm
+	protective cap included	3 protective caps included
	0.34 KG	0.49 KG

REMOTE ANCHORS


CATCH'UP

NEW

FA 60 047 00

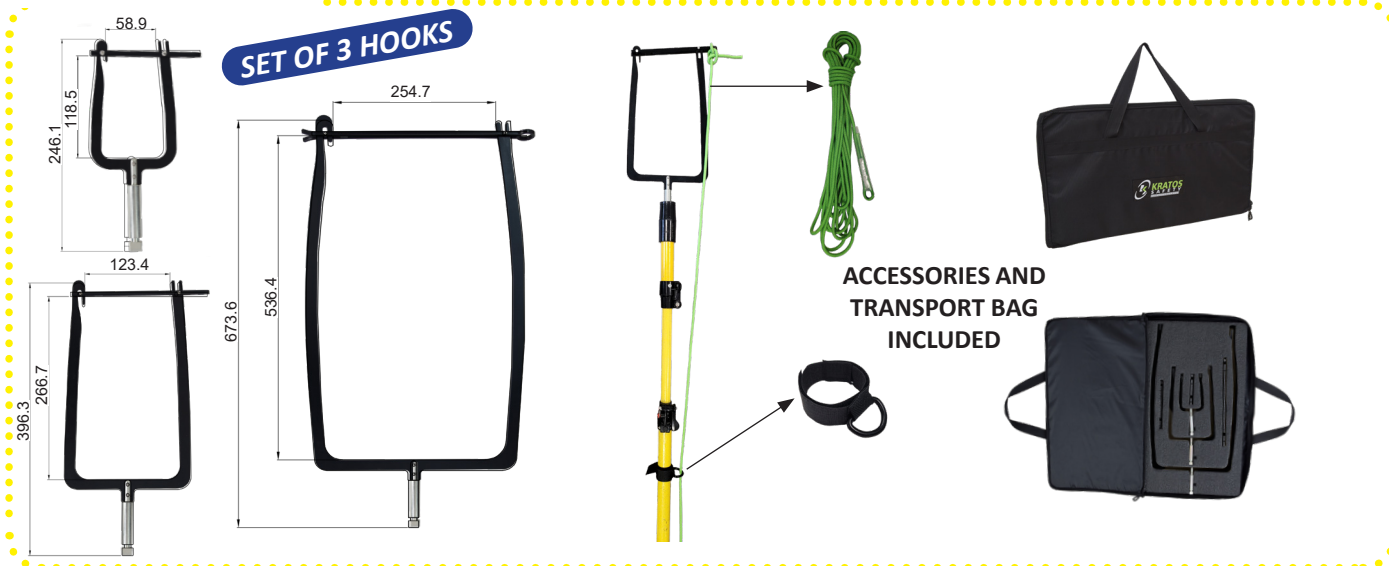

REF.	FA 60 047 00
CE UK CA	---
MAT.	ALU
+	FA 60 016 05
Kg	SMALL: 0.20 KG MEDIUM: 0.32 KG BIG: 0.58 KG

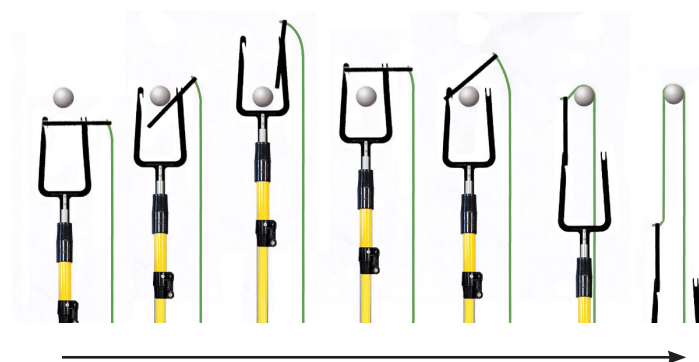

JET

FA 60 037 12



REF.	FA 60 037 12
CE UK CA	EN 795 Type B
Person icon	x1
LG.	1.2 m
MAT.	ALU / 45 mm PES
R(kN) / MBS (kN)	18 kN / 23 kN
+	---
Kg	0.37 KG


FA 60 016 05



FA 60 016 01





EXTENSION

REF.	FA 60 016 05	FA 60 016 01
 	---	---
MAT.	FIBERGLASS	FIBERGLASS
LG.	2 m → 8 m	1 m
	6 KG	6 KG
	---	---
+	MAX. DIELECTRIC RESISTANCE = 50 kV	MAX. DIELECTRIC RESISTANCE = 50 kV
	5.10 KG	0.42 KG

FA 60 016 02

HANG'UP

FA 60 016 06



REF.	FA 60 016 02	FA 60 016 06
 	EN 795 Type B	EN 795 Type B
	22 kN / 60 mm	23 kN / 95 mm
MAT.		
+	FA 60 016 05	FA 60 016 05
	0.49 KG	0.88 KG

ANCHOR SLINGS



FA 60 005 06



FA 60 005 08



FA 60 005 12



FA 60 005 15




FA 60 005 20



FA 60 005 30



REF.	FA 60 005 XX
 	EN 795 Type B EN 566
	x1
LG.	0.6 m 0.8 m 1.2 m 1.5 m 2.0 m 3.0 m
MAT.	 20 mm PES
R(kN) / MBS (kN)	22 kN / 30 kN
	0.07 KG 0.09 KG 0.13 KG 0.16 KG 0.21 KG 0.33 KG

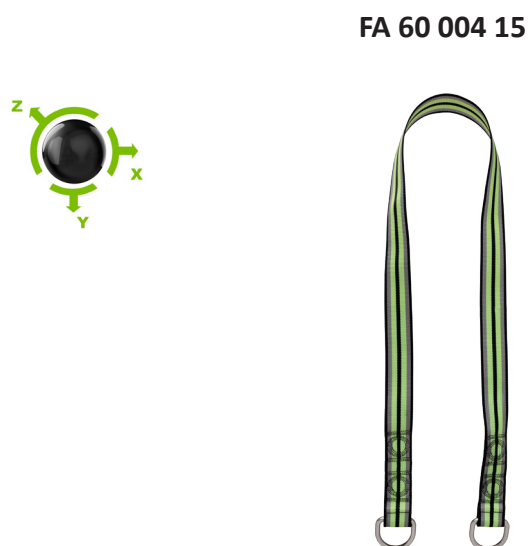

FA 60 004 15



FA 60 006 10
FA 60 006 20



UV-resistant
sheath



FA 60 029 05
FA 60 029 10



FA 60 006 10S
FA 60 006 20S
FA 60 006 40S





UV-resistant
sheath

protective sleeve
at each end

REF.	FA 60 004 15	FA 60 029 XX	FA 60 006 XX FA 60 006 XXS	
 	EN 795 Type B	EN 795 Type B	EN 795 Type B	EN 795 Type B EN 354
	x1	x1	x1	
LG.	1.5 m	Max. 5.0 m Max. 10.0 m	1.0 m 2.0 m	1.0 m 2.0 m 4.0 m
MAT.	 45 mm PES	 45 mm PES	PVC / 	PVC / 
R(kN) / MBS (kN)	18 kN / 30 kN	18 kN / 19 kN	12 kN / 25 kN 12 kN / 25 kN	
+	---	---	---	
	0.31 KG	0.61 KG 0.98 KG	0.56 KG 0.80 KG	0.46 KG 0.74 KG 1.40 KG


TEMPORARY LIFELINES

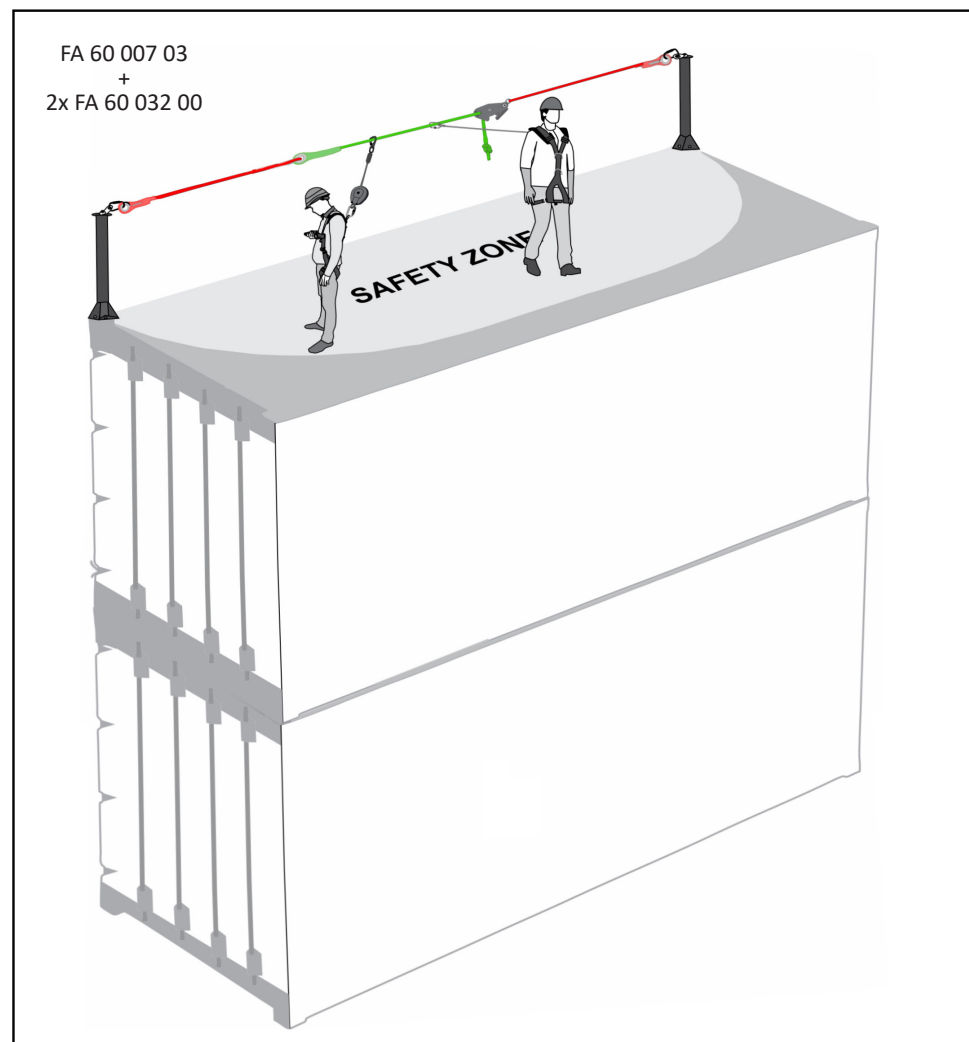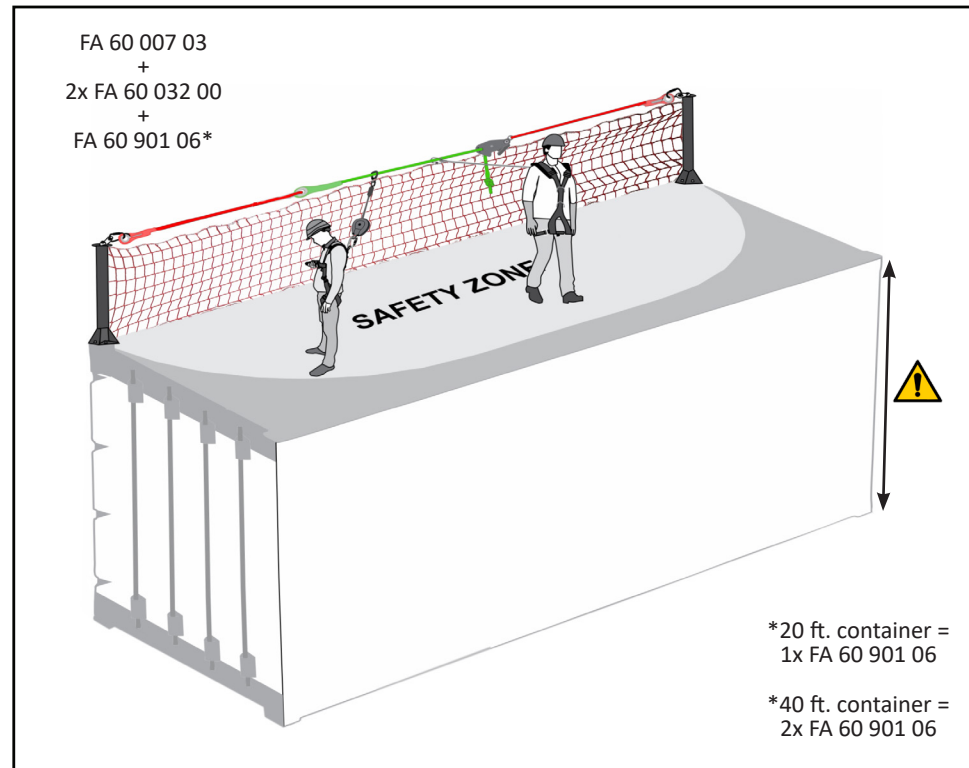

POST LINE

FA 60 007 03


MAXI 14 M

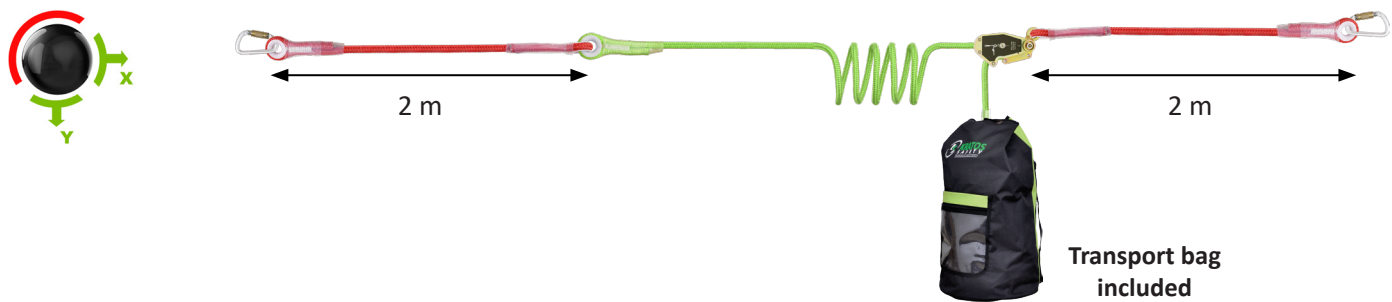


CONTE POST FA 60 032 00



FA 60 901 06

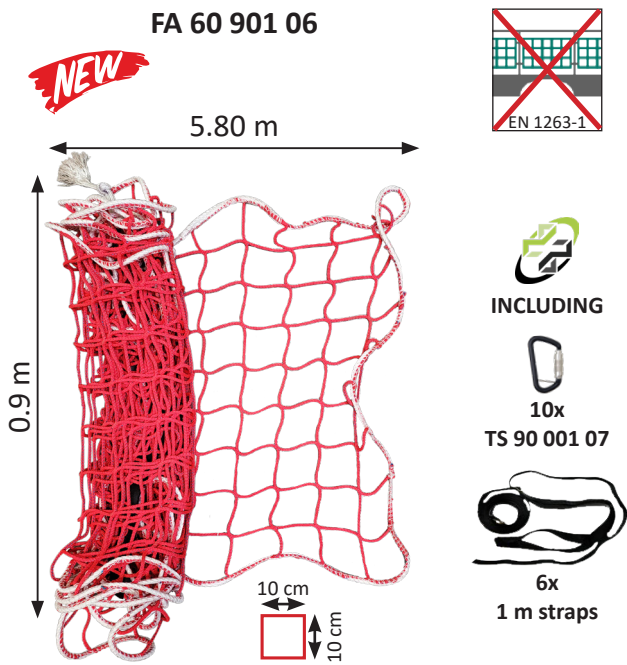

REF.	FA 60 007 03	FA 60 032 00	FA 60 901 06
 	PPE Regulation (EU) 2016/425 Annex II using EN 795 Type C TS 16415 Type C	EN 795 Type B	---
	x2	x1	---
MAT.	 16 mm PES		HD PE
R (kN) / MBS (kN)	18 kN / 23 kN	12 kN / 15 kN	---
MAT. 	 	---	 ---
LG. / f MIN. → MAX.	5.0 m → 14.0 m / 1.40 m → 2.80 m	---	---
	ISO Container	ISO Container	20 ft ISO Container = 1 pc. 40 ft ISO Container = 2 pcs.
+	---	360°	---
	9.27 KG	14.53 KG	---

TEMPORARY LIFELINES

EC LINE

FA 60 007 00


MAXI 20 M




2x
FA 50 101 17
INCLUDED



or

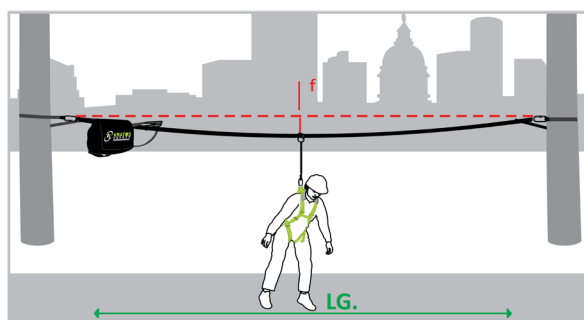

or



FA 60 900 00




TENSION INDICATOR

REF.	FA 60 007 00	FA 60 900 00
 	PPE Regulation (EU) 2016/425 Annex II using EN 795 Type C TS 16415 Type C	---
	x2	---
MAT.	 30 mm PES	
R (kN) / MBS (kN)	18 kN / 23 kN	--- / 25 kN
MAT.  		---
LG. / f MIN. → MAX.	2.0m → 20.0m / 0.8m → 3.2m	---
+	---	---
	3.43 KG	0.53 KG

C-LINE

FA 60 007 01


MAXI 25 M

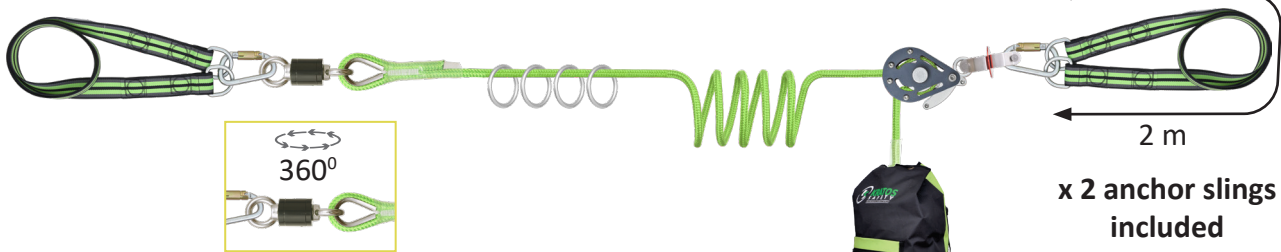

CROSS LINE 1

FA 60 007 02

MAXI 25 M

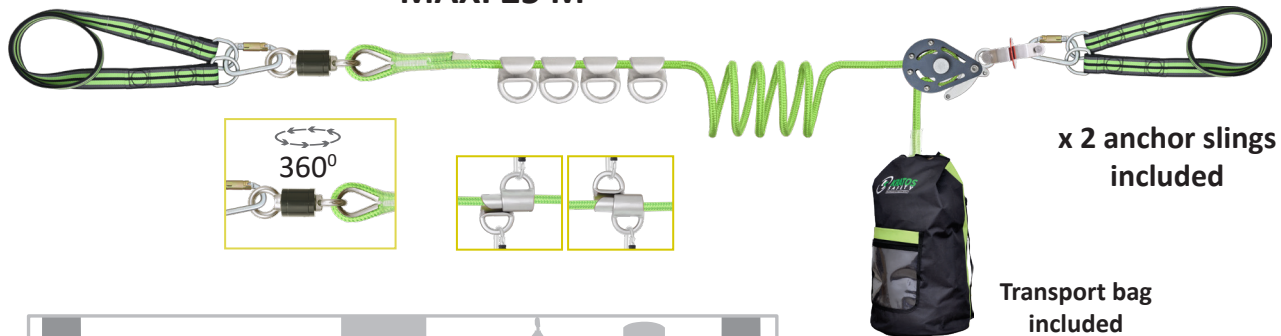




REF.	FA 60 007 01	FA 60 007 02
 	PPE Regulation (EU) 2016/425 Annex II using EN 795 TS 16415 Type C	PPE Regulation (EU) 2016/425 Annex II using EN 795 Type C TS 16415 Type C
	x4	x4
MAT.	 16 mm PES	 16 mm PES
R (kN) / MBS (kN)	18 kN / 23 kN	18 kN / 23 kN
MAT. 	 STEEL /  ALU &  INOX	 STEEL /  ALU &  INOX
LG. / f MIN. → MAX.	5.0 m → 25.0 m / 1.20 m → 4.83 m	5.0 m → 25.0 m / 1.20 m → 4.83 m
+	TENSION INDICATOR	TENSION INDICATOR
 Kg	9.27 KG	10.10 KG

TEMPORARY LIFELINES

CROSS LINE 2

FA 60 007 04

MAXI 45 M

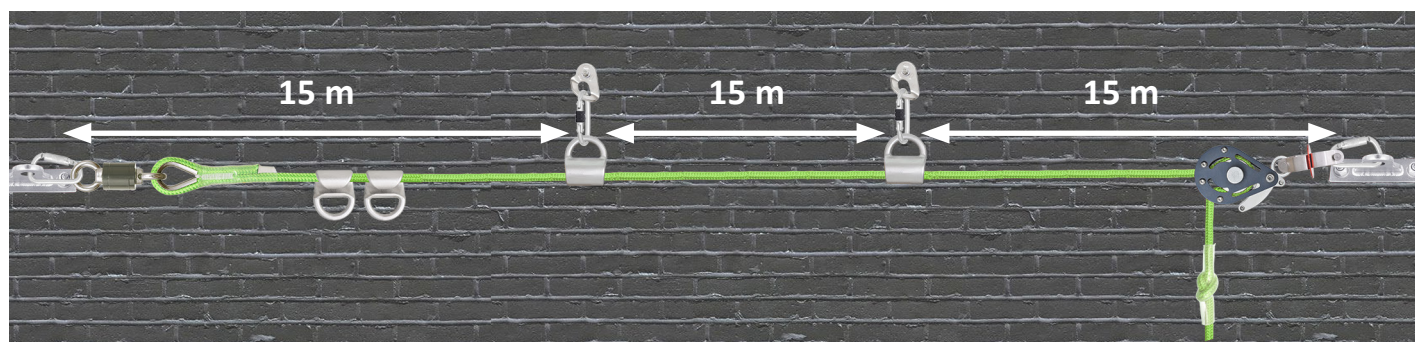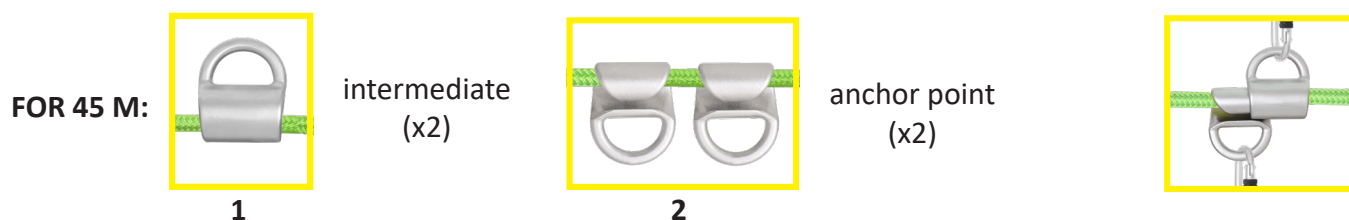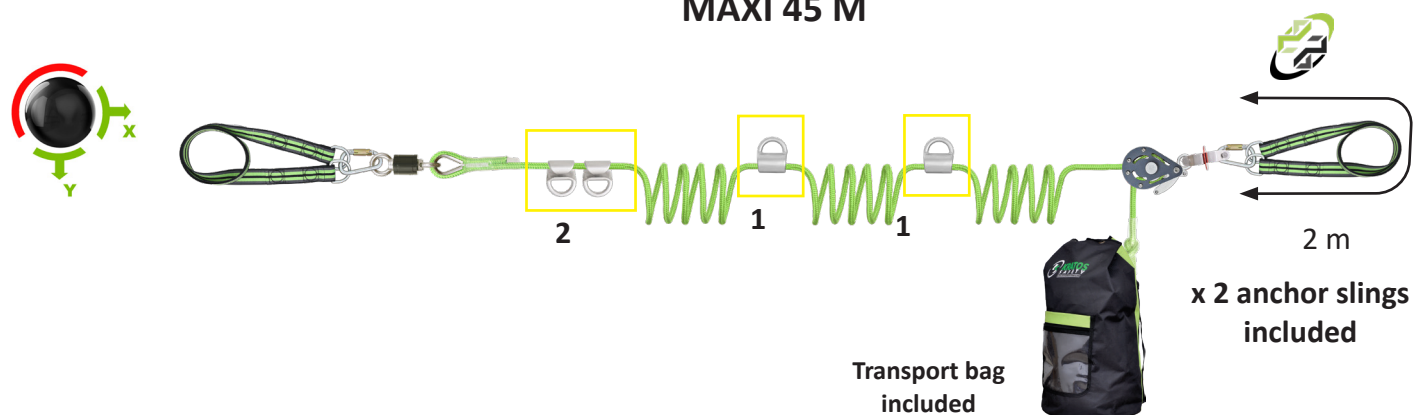


REF.	FA 60 007 04
 	PPE Regulation (EU) 2016/425 Annex II using EN 795 Type C TS 16415 Type C
	x2 (0-45 m) x3 (0-30 m) x4 (0-25 m)
MAT.	 16 mm PES
R (kN) / MBS (kN)	18 kN / 23 kN
MAT.  	 STEEL /  ALU &  INOX
LG. / f MIN. → MAX.	5.0 m → 45.0 m / 1.45 m → 7.83 m
+	TENSION INDICATOR
	14.11 KG


COOL LINE

FA 60 033 18

MAXI 18 M



FA 60 033 19
(p. 135)

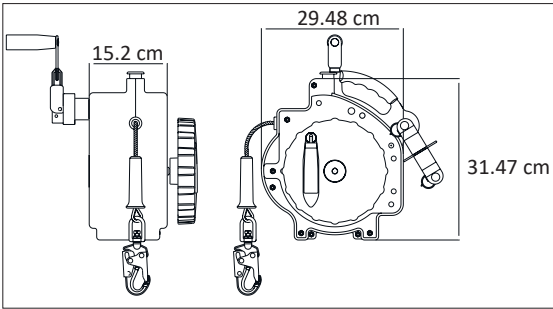

REF.	FA 60 033 18	
 	PPE Regulation (EU) 2016/425 Annex II using EN 795 Type C TS 16415 Type C	
	x2	
MAT.  	PA  STEEL Ø 6.0 mm	
R (kN) / MBS (kN)	13 kN / 23 kN	
MAT.  	 STEEL	
LG. / f MIN. → MAX.	5.0 m → 18.0 m / 1.23 m → 2.59 m	
+	TENSION INDICATOR	
	14.39 KG	

TEMPORARY LIFELINES



NEW

FA 60 039 12
FA 60 039 12S
FA 60 039 24
FA 60 039 24S





INCLUDED





2X FA 60 039 01



FA 60 039 12
FA 60 039 12S




FA 60 039 24
FA 60 039 24S



REF.	FA 60 039 12 FA 60 039 12S	FA 60 039 24 FA 60 039 24S
	EN 360	
	x1	
MAT.	PA / STEEL FA 60 039 12 / FA 60 039 24 SNOX FA 60 039 12S / FA 60 029 24S Ø 4.5 mm	
R (kN) / MBS (kN)	12 kN / 17 kN	
MAT.	STEEL FA 60 039 12 / FA 60 039 24 SNOX FA 60 039 12S / FA 60 029 24S	
DIM.	↔ 12 m ↓ 6 m ↔ 6 m ↓ 12 m ↔ 24 m ↓ 20 m ↔ 12 m ↓ 12 m	
ARREST DISTANCE	1.80 m	
+	Reduced arrest distance Horizontal & vertical movement	
	18.13 KG 18.13 KG	19.53 KG 19.53 KG

COMING SOON
PROCHAINEMENT

I-BEAM OPTION

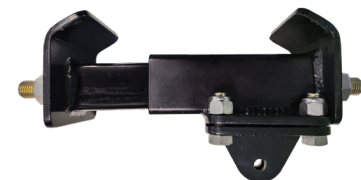

FA 60 039 02



REF.	FA 60 039 02
	EN 795 Type A
	x1
MAT.	STEEL
R (kN) / MBS (kN)	12 kN / 23 kN

+	160 mm → 240 mm
	For horizontal or vertical I-beams 4.35 KG



T-LINE SAFETY SYSTEM

NEW

FA 60 039 12W
FA 60 039 12WS
FA 60 039 24W
FA 60 039 24WS



FALL ARREST
3-IN-1
ANCHOR LINE
+
RESCUE SYSTEM



INCLUDED





2X FA 60 039 01



FA 60 039 12W
FA 60 039 12WS




FA 60 039 24W
FA 60 039 24WS



REF.	FA 60 039 12W FA 60 039 12WS	FA 60 039 24W FA 60 039 24WS
	EN 360 EN 1496 Class A	
	x1	
MAT.	PA / FA 60 039 12 / FA 60 039 24 FA 60 039 12S / FA 60 039 24S Ø 4.5 mm	
R (kN) / MBS (kN)	12 kN / 17 kN	
MAT.	FA 60 039 12 / FA 60 039 24 FA 60 039 12S / FA 60 039 24S	
DIM.	12 m 6 m 6 m 12 m	24 m 20 m 12 m 12 m
ARREST DISTANCE	1.80 m	
+	Reduced arrest distance Horizontal & vertical movement Integrated rescue system	
	20.10 KG 20.10 KG	21.50 KG 21.50 KG

COMING SOON
PROCHAINEMENT

I-BEAM OPTION

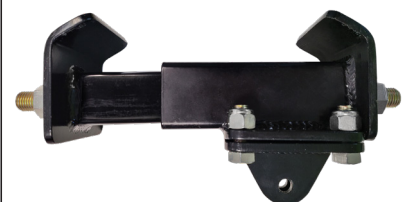

FA 60 039 02





KS 4000





REF.	KS 4000
 	EN 795 Type C TS16415 Type C (not PPE)
	x4
	140 KG
MAT.	 STEEL &  INOX
R (kN)	> 28 kN

KITS PRÊTS À L'EMPLOI | READY TO USE SETS | KITS LISTOS PARA EL USO


FA 60 200 00  12,42 KG

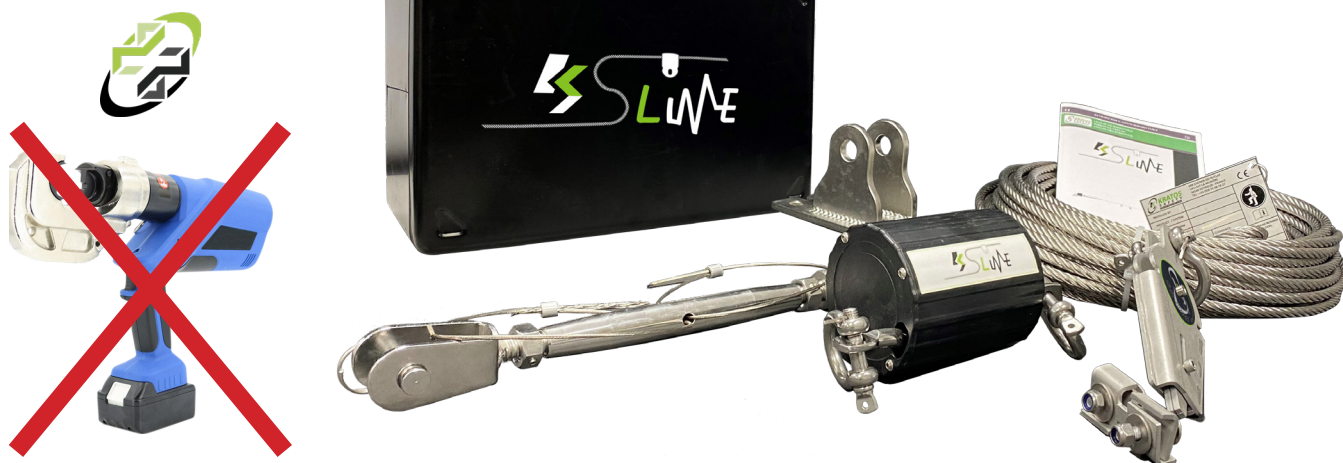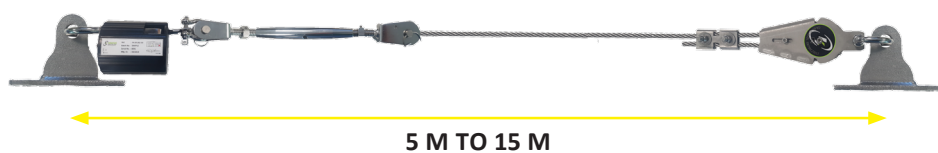

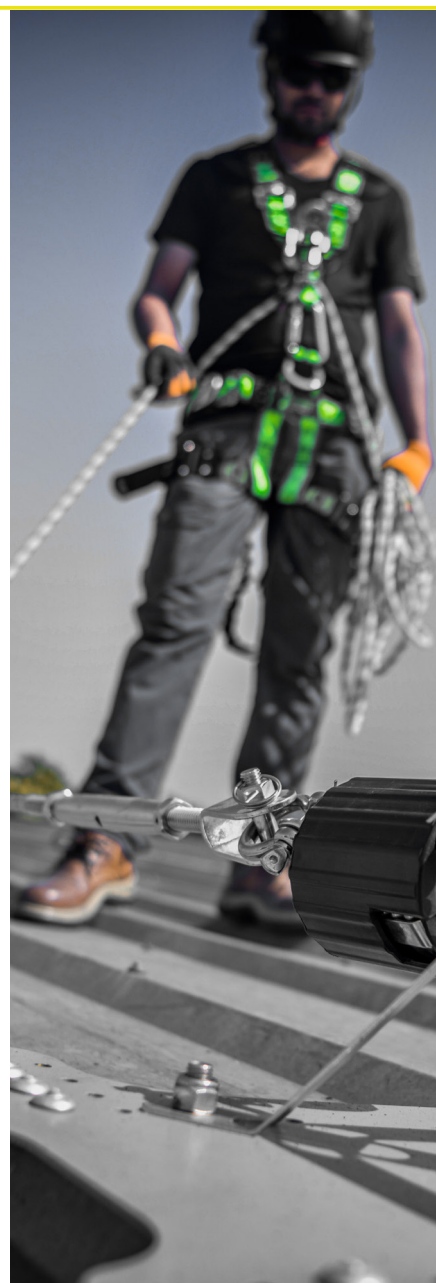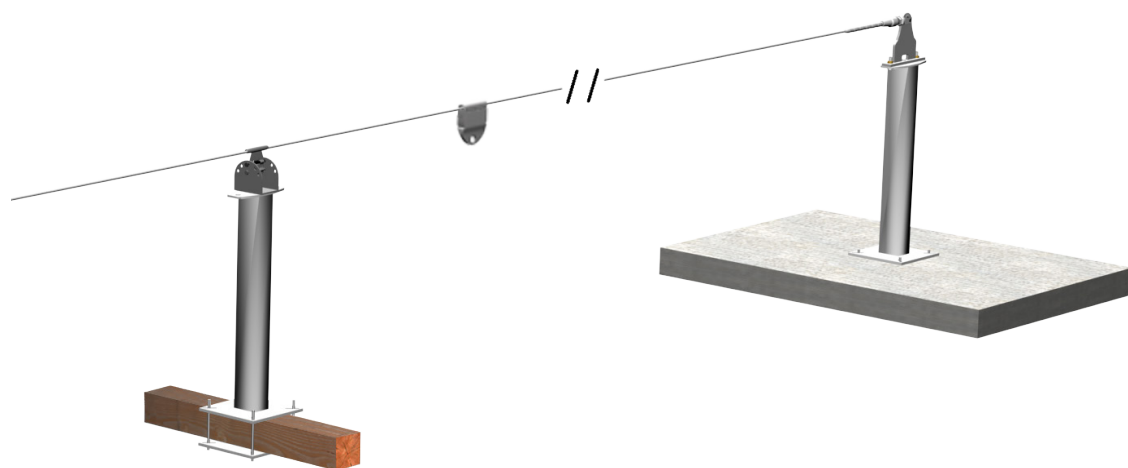

KIT PRONTI ALL'USO | EINSATZFERTIGE KITS

FA 60 200 01  17,19 KG

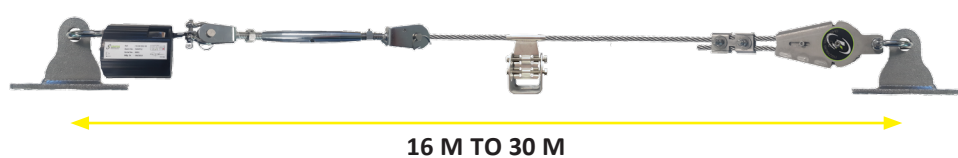




KS 5000


REF.	KS 5000
CE UK CA	EN 795 Type D TS 16415 Type D (not PPE)
	x6
KG	140 KG
MAT.	ALU / INOX / STEEL
R (kN)	> 28 kN



6 USERS

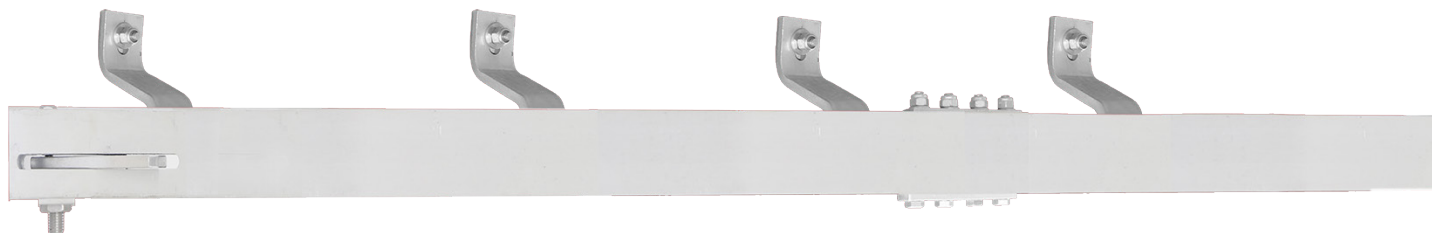

PLUS D'INFORMATIONS / FURTHER INFORMATION / MÁS INFORMACIÓN /
PER MAGGIORI INFORMAZIONI / FÜR MEHR INFORMATIONEN

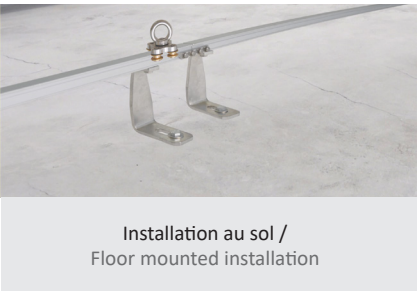

SUITABLE FOR WORK
IN SUSPENSION



		689 CHEMIN DU BUCLAY LIEU-DIT LA MURIÈRE 38540 HEYRIEUX - FRANCE TEL : +33 (0)4 72 48 78 27			
INSTALLED BY					
PRODUCT / SYSTEM					
STANDARD / NORM					
BATCH AND YEAR OF MANUFACTURE					
LENGTH (in M)		CLEARANCE:			
INSTALLATION DATE / REFERENCE					
ACCEPTANCE DATE					
INSPECTION DATE				MAXIMUM NUMBER OF USERS:	

REF. FA 20 902 00