

GAMMES SPÉCIFIQUES
SPECIFIC LINES
GAMAS ESPECÍFICAS
GAMME SPECIFICHE
SPEZIFISCHE KATEGORIEN



FREE

REVOLTA

SERIES


elri



REVOLTA SERIES

FA 10 113 00 - FA 10 113 01

FA 10 214 00 - FA 10 214 01

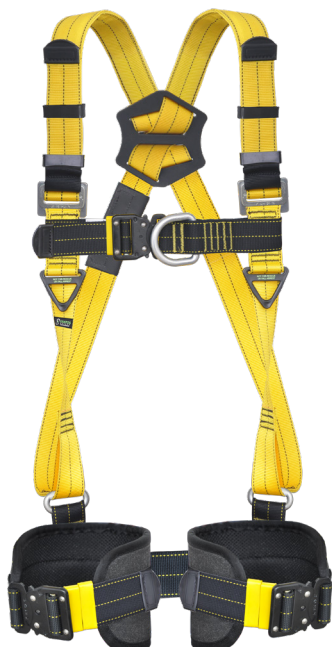

Harnais antichute 2 points d'accrochage
Full body harness 2 attachment points
Arnés anticaída 2 puntos de enganche
Imbracatura anticaduta con 2 punti di attacco
Auffanggurt mit 2 Verankerungspunkten

Harnais antichute 2 points d'accrochage avec ceinture confort
Full body harness 2 attachment points with comfortable belt
Arnés anticaída 2 puntos de enganche con cinturón confort
Imbracatura anticaduta con 2 punti di attacco con cintura comfort
Zweipunktaufgurt mit Komfort Haltegurt

REF.	FA 10 113 00	FA 10 113 01	FA 10 214 00	FA 10 214 01
Sizes	S-L L-XXL		S-L L-XXL	
KG	MAX. 140 KG (PPE-R 11.132)		MAX. 140 KG (PPE-R 11.132)	
CE UK CA	EN 361		EN 361, EN 358	
Attachment	● ●		● ● ●	
	2 / 3		2 / 4	
MAT.  / 	 / 		 / 	
MAT.  45 mm	PES + Treatment		PES + Treatment	
 /  / 	0 / 0 / 2		4 / 1 / 0	
kg	1.51 KG	1.56 KG	2.30 KG	2.40 KG


Traitement / Treatment / Tratamiento /
Trattamento / Behandlung



Oléofuge
Oil-repellent
Oleófuga
Olio repellente
Ölabweisende



Hydrofuge
Water-repellent
Hidrófuga
Impermeabile
Wasserabweisende



Anti-poussière
Dust-repellent
Antisuciedad
Antimacchia
Staubabweisende

REVOLTA
SERIES



FA 30 309 20




FA 30 406 20



FA 40 907 20



REF.	FA 30 309 20	FA 30 406 20	FA 40 907 20
LG. (MIN. / MAX.)	1.5 m / 2.0 m	1.5 m / 2.0 m	1.4 m / 2.0 m
 KG	140 KG	140 KG	---
 	EN 355	EN 355	EN 358
MAT.	 45 mm  PES + Treatment	 45 mm  PES + Treatment	 45 mm PES + Treatment
	---	---	---
MAT. 			
	NO	NO	---
+		PPE-R 11.063	
	0.99 KG	1.80 KG	0.68 KG



FA 10 212 00

FA 60 016 05



ELASTIC



14 kV



50 kV

(p. 139)

Harnais antichute diélectrique 2 points d'accrochage avec ceinture confort
Dielectric full body harness 2 attachment points with comfortable belt
Arnés anticaída dieléctrico 2 puntos de enganche con cinturón confort
Imbracatura anticaduta dielettrica con 2 punti di attacco con cintura comfort
Dielektrisches Auffanggurt mit 2 Verankerungspunkten mit Haltegurt

REF.	FA 10 212 00
Sizes	TU
KG	MAX. 140 KG (PPE-R 11.132)
CE UK CA	EN 361, EN 358
Attachment	● ● ●
6 / 0	
MAT. ○ / ▢	P & STEEL
MAT. 45 mm	PES
SWL = 5KG / MAXI 5KG / ▽	2 / 0 / 0
Kg	2.75 KG



FA 30 308 20




FA 30 405 15




REF.	FA 30 308 20	FA 30 405 15
LG.	2.0 m	1.5 m
KG	100 KG	100 KG
CE UK CA	EN 355	EN 355
MAT.	30 mm PES	30 mm PES
	45 mm	45 mm
MAT.	P & STEEL	P & STEEL
	NO	NO
+	MAX. DIELECTRIC RESISTANCE = 14 kV	MAX. DIELECTRIC RESISTANCE = 14 kV + PPE-R 11.063
Kg	1.35 KG	2.03 KG

FA 50 222 55



(p. 109)

FA 50 223 15



FA 60 008 04




(p. 134)



FA 10 110 00



FA 10 211 00



AUTOMATIC
SAFET'EAR
BUCKLES



Harnais antichute non feu 2 points d'accrochage
Flame resistant full body harness 2 attachment points
Arnés anticaída ignífugo 2 puntos de enganche
Imbracatura anticaduta ignifuga con 2 punti di attacco
Antistatischer Auffanggurt mit 2 Verankerungspunkten

Harnais antichute non feu 2 points d'accrochage avec ceinture
Flame resistant full body harness 2 attachment points with belt
Arnés anticaída ignífugo 2 puntos de enganche con cinturón
Imbracatura anticaduta ignifuga con 2 punti di attacco e cintura
Antistatischer Auffanggurt mit 2 Verankerungspunkten und Haltegurt

REF.	FA 10 110 00	FA 10 211 00
Sizes	TU	TU
KG	MAX. 140 KG (PPE-R 11.132)	MAX. 140 KG (PPE-R 11.132)
CE UK CA	EN 361, ISO 9150, ISO 15025	EN 361, EN 358, ISO 9150, ISO 15025
Attachment	● ●	● ● ●
	2 / 3	2 / 4
MAT.  / 		
MAT.  45 mm	ARAMID	ARAMID
SWL = 5KG  / MAXI 5KG  / 	0 / 0 / 0	3 / 0 / 0
kg 	1.79 KG	2.55 KG

FA 30 305 10
 FA 30 305 15
 FA 30 305 20



FA 30 402 10
 FA 30 402 15



REF.	FA 30 305 10	FA 30 305 15	FA 30 305 20	FA 30 402 10	FA 30 402 15
LG.	1.0 m	1.5 m	2.0 m	1.0 m	1.5 m
 KG	100 KG			100 KG	
 	EN 355, ISO 9150, ISO 15025			EN 355, ISO 9150, ISO 15025	
MAT.	 45 mm ARAMID			 45 mm ARAMID	
	45 mm			45 mm	
MAT. 					
	NO			NO	
+	---			PPE-R 11.063	
	1.1 KG	1.15 KG	1.19 KG	1.6 KG	1.87 KG

FA 40 400 15

FA 40 905 20

FA 60 017 15



REF.	FA 40 400 15	FA 40 905 20	FA 60 017 15
LG.	1.5 m	1.2 m / 2.0 m	1.5 m
 	EN 354, ISO 9150, ISO 15025	EN 358, ISO 9150, ISO 15025	EN 795 Type B, ISO 9150, ISO 15025
MAT.	 45 mm ARAMID	 35 mm ARAMID	 45 mm ARAMID
MAT. 			
R (kN)	22 kN	15 kN	18 kN
	1.48 KG	0.57 KG	0.38 KG

FA 10 109 00 - FA 10 109 01



Harnais antichute antistatique 2 points d'accrochage
Antistatic full body harness 2 attachment points
Arnés anticaída antiestático 2 puntos de enganche
Imbracatura anticaduta antistatica con 2 punti di attacco
Antistatischer Auffanggurt mit 2 Verankerungspunkten

REF.	FA 10 109 00 FA 10 109 01
Sizes	S-L L-XXL
KG	MAX. 140 KG (PPE-R 11.132)
CE UK CA	EN 361
Attachment	● ●
MAT.	5 / 0
MAT.	ALU / INOX
MAT. 45 mm	PES
SWL = 5KG / MAXI 5KG	0 / 0 / 0
+	Ex Zone 1, EN 1149-1, ISO 80079-36, ISO 80079-37
KG	1.23 KG 1.27 KG

FA 30 306 20




FA 30 403 15



FA 60 004 15A



REF.	FA 30 306 20	FA 30 403 15	FA 60 004 15A
LG.	2.0 m	1.5 m	1.5 m
KG	100 KG	100 KG	
CE UK CA	EN 355	EN 355	EN 795 Type B
MAT.	45 mm PES	45 mm PES	45 mm PES / ALU
	45 mm	45 mm	---
MAT.	ALU	ALU	---
	NO	NO	---
R(kN) / MBS (kN)	---	---	18 kN / 30 kN
+	Ex Zone 1, EN 1149-1, ISO 80079-36, ISO 80079-37	Ex Zone 1, EN 1149-1, ISO 80079-36, ISO 80079-37, PPE-R 11.063	Ex Zone 1, EN 1149-1, ISO 80079-36, ISO 80079-37
KG	0.94 KG	1.49 KG	0.31 KG

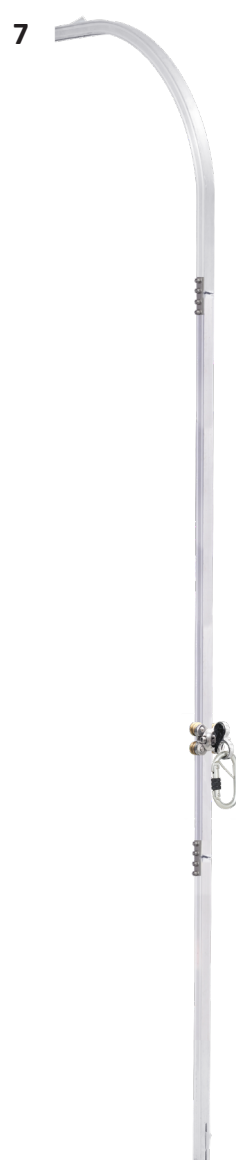

1	FA 20 402 03B-07B	p. 56
	FA 20 402 10B/S	p. 57
	FA 20 402 15/B-20/S	p. 57/59
	FA 20 402 30/S	p. 59
2	FA 20 400 25-30/S	p. 63
3	FA 20 600 06-10-15-20	p. 62
4	FA 20 401 10/S-20/S-30/S	p. 52
5	FA 20 410 10-20-30	p. 51
6	KS 7000	p. 77
7	KS 8000	p. 80
8	KS 9000	p. 81





15



16



17



9	FA 50 103 22	p. 104
10	FA 60 033 18	p. 147
11	FA 60 003 20-30	p. 126
12	FA 60 001 00, FA 60 002 00 FA 60 101 00, FA 60 102 00	p. 120 p. 121
13	FA 60 022 00-01-02	p. 124
14	FA 60 103 00	p. 122
15	LA 10 X00 XX, LA 10 1000 11-16	p. 186, 187
16	KS 4000	p. 150
17	FA 60 008 00-01-03	p. 134