



CONNECTEURS
CONNECTORS
CONECTORES
CONNETTORI
VERBINDUNGSELEMENTE

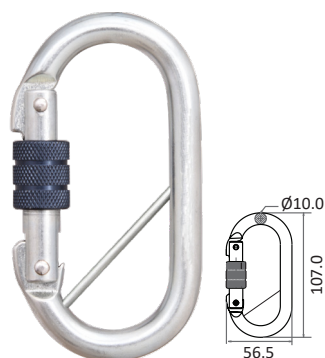


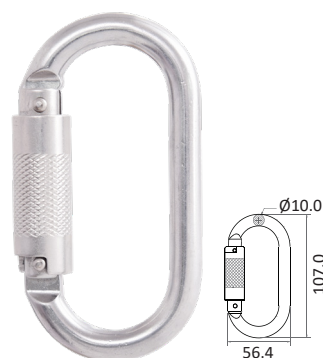

FA 50 101 17

FA 50 102 17

FA 50 224 18

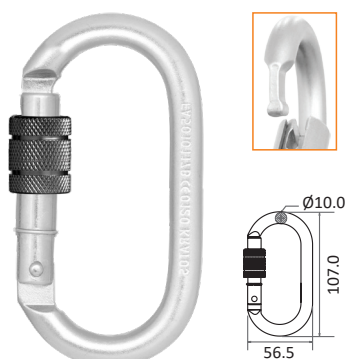FA 50 301 23



REF.	FA 50 101 17	FA 50 102 17	FA 50 224 18	FA 50 301 23
 	EN 362 Class B & M	EN 362 Class B & M	EN 362 Class B & M	EN 362 Class B
	25 kN / 18 mm	25 kN / 18 mm	25 kN / 16 mm	40 kN / 22 mm
MAT.				
	SCREW	SCREW	QUARTER	TRIPLE ACTION
KEYLOCK	---	---	---	---
+	---	CAPTIVE PIN	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER
	0.16 KG	0.17 KG	0.16 KG	0.23 KG

FA 50 101 17B

FA 50 225 23B

FA 50 301 23B


REF.	FA 50 101 17B	FA 50 225 23B	FA 50 301 23B
 	EN 362 Class B	EN 362 Class B	EN 362 Class B
	23 kN / 15 mm	45 kN / 22 mm	45 kN / 22 mm
MAT.			
	SCREW	QUARTER	TRIPLE ACTION
KEYLOCK	YES	YES	YES
+	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER
	0.17 KG	0.25 KG	0.25 KG

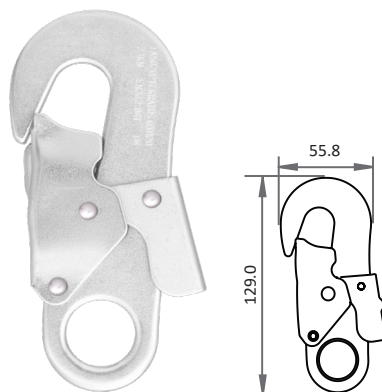FA 50 202 17



FA 50 207 55




REF.	FA 50 202 17	FA 50 207 55
CE UK CA	EN 362 Class T	EN 362 Class T
	23 kN / 18 mm	23 kN / 50.8 mm
MAT.		
	DOUBLE ACTION	DOUBLE ACTION
KEYLOCK	---	---
+	---	---
	0.21 KG	0.51 KG

FA 50 213 80



FA 50 216 55

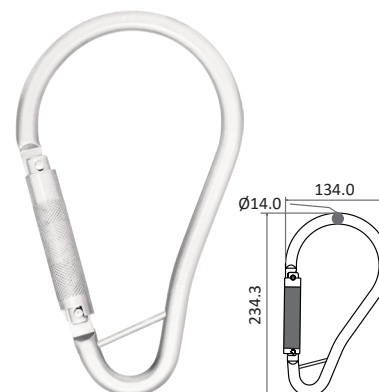

REF.	FA 50 213 80	FA 50 216 55
CE UK CA	EN 362 Class T	EN 362 Class B
	23 kN / 85 mm	23 kN / 55 mm
MAT.		
	DOUBLE ACTION	QUARTER
KEYLOCK	---	---
+	---	INDIVIDUAL NUMBER , CAPTIVE PIN
	0.84 KG	0.75 KG

FA 50 103 22

FA 50 201 22

FA 50 219 14B

FA 50 302 22


REF.	FA 50 103 22	FA 50 201 22	FA 50 219 14B	FA 50 302 22
	EN 362 Class B EN 12275 Class B/H	EN 362 Class B EN 12275 Class B/H	EN 362 Class B	EN 362 Class B EN 12275 Class B/H
	23 kN / 22.5 mm	23 kN / 21 mm	23 kN / 14 mm	23 kN / 21 mm
MAT.				
	SCREW	QUARTER	QUARTER	TRIPLE ACTION
KEYLOCK	---	---	YES	---
+	---	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER
	0.08 KG	0.08 KG	0.10 KG	0.08 KG




FA 50 103 22B

FA 50 107 15B

FA 50 201 22B

FA 50 304 22B


REF.	FA 50 103 22B	FA 50 107 15B	FA 50 201 22B	FA 50 304 22B
	EN 362 Class B	EN 362 Class B	EN 362 Class B	EN 362 Class B
	23 kN / 21 mm	23 kN / 15 mm	23 kN / 20 mm	23 kN / 20 mm
MAT.				
	SCREW	SCREW	QUARTER	TRIPLE ACTION
KEYLOCK	YES	YES	YES	YES
+	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER
	0.08 KG	0.08 KG	0.09 KG	0.09 KG

NEW LUNA 		NEW GIRAS-1 		NEW GIRAS-2 		 INDIVIDUAL NUMBER	
REF.		FA 50 230 20B		FA 50 500 00		FA 50 500 12	
 		EN 362 Class M		PPE-R 11.135		PPE-R 11.135	
		23 kN / 20 mm		23 kN / ---		23 kN / 12 mm	
MAT.							
 BEARING TYPE		QUARTER / ---		--- / BALL BEARING		SCREW / BALL BEARING	
KEYLOCK		YES		---		---	
+		INDIVIDUAL NUMBER		INDIVIDUAL NUMBER		INDIVIDUAL NUMBER	
		0.11 KG		0.13 KG		0.21 KG	



ACCESSOIRE / ACCESSORY / ACCESORIO / ACCESSORIO / ZUBEHÖR:

FA 50 900 00

SET OF 10 PCS.



x 10 pcs.



0.03 KG (10 pcs.)



FOR ROPES DIA. 9 MM TO 12 MM



Aucun risque d'accrochage
100% Snag-Free
Ningún riesgo de engancho
Nessuno rischio di aggancio
Keine Gefahr, hängenubleiben

Mousquetons type keylock
Keylock type karabiners
Mosquetones de tipo Keylock
Moschettoni di tipo Keylock
Karabiner vom Typ Keylock

Pourquoi le Keylock?
Why Keylock?
¿Por qué el Keylock?
Perché Keylock?
Warum Keylock?



Risque d'accrochage
Chance of Snagging
Riesgo de engancho
Rischio di aggancio
Gefahr des Hängenbleibens

Mousquetons classiques
Regular karabiners
Mosquetones clásicos
Moschettoni classici
Klassische Karabiner

FA 50 212 21



FA 50 220 21



FA 50 221 17



REF.	FA 50 212 21	FA 50 220 21	FA 50 221 17
	EN 362 Class T	EN 362 Class T	EN 362 Class T
	23 kN / 18.5 mm	23 kN / 22 mm	23 kN / 18 mm
MAT.			
	DOUBLE ACTION	QUARTER	QUARTER
KEYLOCK	---	YES	YES
+	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER, INDICATOR
	0.16 KG	0.13 KG	0.18 KG

FA 50 228 18B



FA 50 229 25B



REF.	FA 50 228 18B	FA 50 229 25B
	EN 362 Class T	EN 362 Class T
	23 kN / 18 mm	23 kN / 25 mm
MAT.		
	QUARTER	DOUBLE ACTION
KEYLOCK	YES	YES
+	INDIVIDUAL NUMBER, INDICATOR	INDIVIDUAL NUMBER
	0.22 KG	0.13 KG

FA 50 208 11



FA 50 218 60



REF.	FA 50 208 11	FA 50 218 60
	EN 362 Class T	EN 362 Class A&T
	20 kN / 109 mm	22 kN / 60 mm
MAT.		
	DOUBLE ACTION	DOUBLE ACTION
KEYLOCK	---	---
+	INDIVIDUAL NUMBER	UIAA 121.3, INDIVIDUAL NUMBER
	0.9 KG	0.44 KG

FA 50 214 60



FA 50 226 60


HUKA-1

FA 50 227 60


HUKA-2**FORGED**

REF.	FA 50 214 60	FA 50 226 60	FA 50 227 60
	EN 362 Class A & T	EN 362 Class T	EN 362 Class T
	20 kN / 60 mm	23 kN / 60 mm	23 kN / 60 mm
MAT.			
	QUARTER	DOUBLE ACTION	DOUBLE ACTION
KEYLOCK	---	---	---
+	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER	INDIVIDUAL NUMBER , INDICATOR
	0.26 KG	0.52 KG	0.62 KG

FA 50 210 11

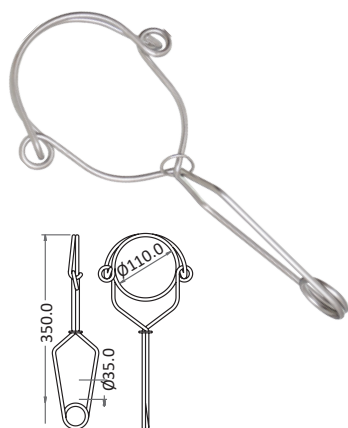


FA 50 211 75

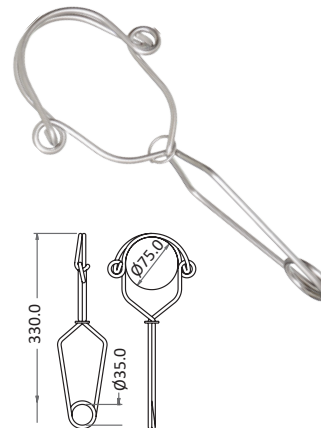

REF.	FA 50 210 11	FA 50 211 75
	EN 362 Class A	EN 362 Class A
	20 kN / 110 mm	20 kN / 75 mm
MAT.		
	DOUBLE ACTION	DOUBLE ACTION
KEYLOCK	---	---
	0.32 KG	0.30 KG

FA 50 106 22

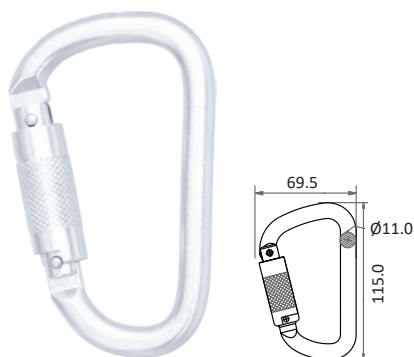


FA 50 305 16




REF.	FA 50 106 22	FA 50 305 16
	EN 362 Class B	EN 362 Class B
	25 kN / 22.5 mm	23 kN / 16.5 mm
MAT.		
	QUARTER	TRIPLE ACTION
KEYLOCK	---	---
	0.23 KG	0.21 KG

FA 50 222 55




FA 50 223 15




REF.	FA 50 222 55	FA 50 223 15
	EN 362 Class T	EN 362 Class T
	23 kN / 55 mm	23 kN / 15 mm
MAT.	P /	P /
	DOUBLE ACTION	DOUBLE ACTION
KEYLOCK	---	---
+	MAX. DIELECTRIC RESISTANCE = 14KV	MAX. DIELECTRIC RESISTANCE = 14KV
	0.56 KG	0.35 KG

FA 50 400 16




FA 50 401 10



REF.	FA 50 400 16	FA 50 401 10
	EN 362 Class Q	EN 362 Class Q
	32 kN / 17 mm	22 kN / 10 mm
MAT.		
	SCREW	SCREW
KEYLOCK	---	---
	0.08 KG	0.09 KG

MAT.	Picture	REF.	Keylock	Locking system					 			
				Screw-locking	Quarter	Double action	Triple action					
		FA 50 101 17	X	✓				18 mm	EN 362:2004 Class B/M	25 kN	15 kN	0.160 KG
		FA 50 101 17B	✓	✓				15 mm	EN 362:2004 Class B	23 kN	7 kN	0.167 KG
		FA 50 102 17	X	✓				18 mm	EN 362:2004 Class B/M	25 kN	15 kN	0.170 KG
		FA 50 202 17	X			✓		18 mm	EN 362:2004 Class T	23 kN		0.210 KG
		FA 50 207 55	X			✓		50.8 mm	EN362:2004 Class T	23 kN		0.510 KG
		FA 50 213 80	X			✓		85 mm	EN 362:2004 Class T	23 kN		0.840 KG
		FA 50 216 55	X		✓			55 mm	EN 362:2004 Class B	23 kN	7 kN	0.745 KG
		FA 50 224 18	X		✓			16 mm	EN 362:2004 Class B/M	25 kN	15 kN	0.160 KG
		FA 50 225 23B	✓		✓			22 mm	EN 362:2004 Class B	45 kN	7 kN	0.250 KG
		FA 50 301 23	X				✓	22 mm	EN 362:2004 Class B	40 kN	7 kN	0.233 KG
		FA 50 301 23B	✓				✓	22 mm	EN 362:2004 Class B	45 kN	7 kN	0.248 KG
		FA 50 400 16	X	✓				17 mm	EN 362:2004 Class Q	32 kN	10 kN	0.080 KG
		FA 50 401 10	X	✓				10 mm	EN 362:2004 Class Q	22 kN	10 kN	0.090 KG
			FA 50 103 22	X	✓				22.5 mm	EN 362:2004 Class B, EN 12275:2013 Class B/H	23 kN	7 kN
		FA 50 103 22B	✓	✓				21 mm	EN 362:2004 Class B	23 kN	7 kN	0.082 KG
		FA 50 107 15B	✓	✓				15 mm	EN 362:2004 Class B	23 kN	7 kN	0.080 KG
		FA 50 201 22	X		✓			21 mm	EN 362:2004 Class B, EN 12275:2013 Class B/H	23 kN	7 kN	0.084 KG
		FA 50 201 22B	✓		✓			20 mm	EN 362:2004 Class B	23 kN	7 kN	0.087 KG
		FA 50 208 11	X			✓		109 mm	EN 362:2004 Class A/T	20 kN		0.900 KG
		FA 50 212 21	X			✓		18.5 mm	EN 362:2004 Class T	23 kN		0.160 KG
		FA 50 214 60	X		✓			60 mm	EN 362:2004 Class A/T	23 kN		0.240 KG
		FA 50 218 60	X			✓		60 mm	EN 362:2004 Class A/T	22 kN		0.440 KG
		FA 50 219 14B	✓		✓			14 mm	EN 362:2004 Class B	23 kN	7 kN	0.100 KG
		FA 50 220 21	✓		✓			22 mm	EN 362:2004 Class T	23 kN		0.136 KG
		FA 50 221 17	✓		✓			18 mm	EN 362:2004 Class T	23 kN		0.182 KG
		FA 50 226 60	X			✓		60 mm	EN 362:2004 Class T	23 kN		0.52 KG
		FA 50 227 60	X			✓		60 mm	EN 362:2004 Class T	23 kN		0.62 KG
		FA 50 228 18B	✓		✓			18 mm	EN 362:2004 Class T	23 kN		0.22 KG
		FA 50 229 25B	✓			✓		25 mm	EN 362:2004 Class T	23 kN		0.13 KG
		FA 50 230 20B	✓		✓			20 mm	EN 362:2004 Class M	23 kN	15 kN	0.11 KG
		FA 50 302 22	✓				✓	21 mm	EN 362:2004 Class B, EN 12275:2013 Class B/H	23 kN	7 kN	0.087 KG
		FA 50 304 22B	✓				✓	20 mm	EN 362:2004 Class B	23 kN	7 kN	0.087 KG
		FA 50 500 00						---	PPE-R 11.135	23 kN		0.135 KG
		FA 50 500 12						12 mm	PPE-R 11.135	23 kN		0.210 KG

MAT.	Picture	REF.	Keylock	Locking system					CE UK CA			
				Screw-locking	Quarter	Double action	Triple action					
		FA 50 106 22	X		✓			22.5 mm	EN362:2004 Class B	25 kN	7 kN	0.235 KG
		FA 50 210 11	X			✓		110 mm	EN362:2004 Class A	20 kN		0.320 KG
		FA 50 211 75	X			✓		75 mm	EN362:2004 Class A	20 kN		0.300 KG
		FA 50 305 16					✓	16.5 mm	EN362:2004 Class B	23 kN	7 kN	0.210 KG
		FA 50 222 55	X			✓		55 mm	EN 362:2004 Class T	23 kN		0.560 KG
		FA 50 223 15	X			✓		15 mm	EN 362:2004 Class T	23 kN		0.350 KG

 = connector with individual number

COLOUR CODING OF KRATOS SAFETY CONNECTORS LOCKING SYSTEM

			
SCREW-LOCKING	DOUBLE ACTION	TRIPLE ACTION	



ANCRAGES
ANCHORAGES
ANCLAJES
ANCORAGGI
VERANKERUNGEN

